

INVESTIGATION OF SEAL FORMATION ON THE FEEDLOT PROFILE

by

M.C. McCullough¹, D.B. Parker¹, B.W. Auvermann² and C. Robinson¹

¹ West Texas A&M University, Canyon, TX

² Texas A&M University Research and Extension Center, Amarillo, TX

Written for Presentation at the
1999 ASAE/CSAE Annual International Meeting
Sponsored by ASAE

Sheraton Centre Toronto Hotel
Toronto, Ontario Canada
July 18-21, 1999

ABSTRACT

A new university research feedlot was constructed in March 1998. An experiment was conducted to monitor physical changes in soil properties in the feedlot surface as it matured. Three distinct areas characterize each pen: (1) the water trough area, (2) the apron area, and (3) the bottom area. Prior to introducing livestock to the new feedlot, soil samples were obtained from four pens. We present results of two of the pens in this paper, further data collection and lab analyses is ongoing. Three relatively undisturbed soil cores were obtained from each of the three areas within each pen. These samples were taken from the first 15 cm of the soil surface and were tested for saturated hydraulic conductivity using a flexible wall permeameter. Additional samples were collected from borings approximately two meters in length. The borings were divided into 15 cm increments, and samples were analyzed for electrical conductivity. Identical soil samples were collected and analyzed eight months later. The saturated hydraulic

The author(s) is solely responsible for the content of this technical presentation. The technical presentation does not necessarily reflect the official position of ASAE, and its printing and distribution does not constitute an endorsement of views which may be expressed.

Technical presentations are not subject to the formal peer review process by ASAE editorial committees; therefore, they are not to be presented as refereed publications.

Quotation from this work should state that it is from a presentation made by (name of author) at the (listed) ASAE meeting.

EXAMPLE - From Author's Last Name, Initials. "Title of Presentation." Presented at the Date and Title of meeting, Paper No. X. ASAE, 2950 Niles Road, St. Joseph, MI 49085-9659 USA.

For information about securing permission to reprint or reproduce a technical presentation, please address inquiries to ASAE.

conductivity of soils sampled prior to livestock using the pens indicated hydraulic conductivities on the order of 10^{-5} cm/s, while samples taken eight months after cattle used the pens indicated hydraulic conductivities on the order of 10^{-6} cm/s. Mean saturated hydraulic conductivity values decreased by 20 times for the apron area, 3 times for the water trough area, and 66 times for the bottom area. Mean hydraulic conductivities were significantly less for the apron and bottom areas ($P < 0.05$), but not for the water trough area. Dry densities decreased slightly in the eight months of cattle stocking. Moisture contents in the upper 15 cm increased from about 3% to 12%.

Keywords: infiltration, hydraulic conductivity, feedlot, animal waste, manure, seepage

INTRODUCTION

The profile of a feedlot surface varies significantly from most natural soil profiles. Feedlots do not sustain vegetation, therefore plant roots play no role in soil water extraction. Feedlot profiles generally have more uniform moisture content than cropped land profiles (Mielke et al., 1974). An extensive layer of organic matter accumulates over time on the original soil surface which changes the physical and biochemical nature of the profile. Soil compaction by livestock also significantly changes physical properties of the soil. When examining soil profile conditions of cattle feedlots, Mielke et al. (1974) found that the feedlot surface seals itself due to a combination of compaction and plugging from soil particle dispersion caused by manure or manure byproducts. They also found that texture of the soil profiles under the feedlots appeared to have little effect on the water movement into the profile or runoff characteristics for a mature feedlot. Rowsell et al. (1985) found organic solids lodged between soil particles when examining soil that had been exposed to manure infiltration. Biochemical mechanisms can develop that destroy the macrostructure of the soil (Barrington and Madramootoo, 1989). Much research has found that feedlot surfaces have negligible seepage and chemical transport through the profile after a seal has been formed. However, none of the research mentioned here has actually quantified the reduction in hydraulic conductivities, which we are now capable of doing using a flexible wall permeameter. Also, much of the previous sealing research has been done on swine manure and under continuously saturated conditions, significantly different from most cattle feedlots. The purpose of this experiment was to investigate seal formation and solute movement with time at a newly constructed feedyard.

MATERIALS AND METHODS

Soil cores were obtained at West Texas A&M University's new beef cattle feedlot. The feedlot has 30 identical pens of dimensions 6 x 26 m, each with a capacity of 8-10 head. Four pens were selected for this study. This paper presents results of two of the pens located 30 m apart.

Soil cores were collected from just below the concrete apron, adjacent to the concrete pad at the water trough, and from the bottom area within each pen. Three soil cores were collected at each location in the pen as shown in Figure 1. The cores were obtained by driving a thin-wall sampler (Shelby tube) (7.3 cm dia., 30 cm length) into the ground with a sledge hammer. A specially designed metal holder was placed over the top of the tube to prevent damage to the

tube. Soil cores were collected immediately after construction of the feedyard, and again after 8 months of stocking.

Additional soil samples were collected at depth increments of 15 cm from one boring at each location (apron, water trough, bottom) within the pen to maximum depths of 2.5 m. Samples were collected using either a tractor-mounted hydraulic probe (Giddings probe) or if the soil was too hard then a hand auger was used. Individual soil samples were analyzed for moisture content, electrical conductivity (2 part water to 1 part soil by weight), and nutrients. Additional soil cores and depth samples were collected in the drainage channel located downgradient of the pens, and in a control area just outside of the pen area. The control area was not affected by hoof action, but it had been cleared during construction activities so was similar to the initial conditions in the pens. The control area was covered with a geotextile to prevent weed and grass growth in the area which might have affected soil conditions over the 8-month period.

The soil cores were extruded using a hydraulic ram. Cores were weighed, measured, and trimmed. Cores were placed into latex membranes, then the saturated hydraulic conductivity of each core was measured using a flexible wall permeameter (SoilTest Tri-Flex 2) per ASTM Method D 5084 (ASTM, 1996).

Statistical analyses were performed using Excel and SPSS Version 7.0. Hydraulic conductivity data were log-transformed prior to running ANOVA and LSD comparisons because hydraulic conductivity data has been shown to be lognormally distributed (Freeze and Cherry, 1979).

RESULTS AND DISCUSSION

A summary of the saturated hydraulic conductivity data is shown in Table 1. The hydraulic conductivities of the six samples (3 samples within each of two pens) were averaged to perform statistical comparisons between the initial and 8 month time periods at each location in the pen. Initially, there were no statistically significant differences between geometric mean hydraulic conductivities at different locations within the pen, an indication that compaction during the construction of the pens was relatively uniform. Hydraulic conductivities decreased after 8 months at all locations within the pen. Hydraulic conductivity values decreased by 20 times for the apron area, 3 times for the water trough area, and 66 times for the bottom area. Only the water trough area did not have statistically different mean hydraulic conductivities between the initial time and after 8 months. The mean dry density decreased in all three areas, however, only the apron and water trough were statistically different (Table 1).

Final hydraulic conductivities were lowest in the bottom area. This is the area that cattle frequent most often except for when they are eating or drinking. We observed that the bottom area was more difficult to core and obtain samples than the other two areas.

There is evidence of solute movement based on elevated electrical conductivity readings at depths of about 150 cm at the apron and water trough areas in Pen 2, and in the bottom area in Pen 1 (Figures 2 and 3). No observable differences were observed in the apron and water trough areas of Pen 1. Electrical conductivities were elevated at the bottom area in Pen 1 (Figure 4), but not in Pen 2. It appears that most infiltration took place in the bottom area in Pen 1, while in Pen 2 most infiltration took place in the apron and water trough areas. There was little difference in electrical conductivity with depth in the control area (Figure 5).


REFERENCES

- ASTM. 1996. Standard test method for measurement of hydraulic conductivity of saturated porous materials using a flexible wall permeameter. Test Method D 5084-90. American Society for Testing and Materials. West Conshohocken, PA.
- Freeze, R.A. and J.A. Cherry. 1979. Groundwater. Prentice-Hall, Inc. Englewoods Cliffs, NJ.
- Mielke, L.N., N. P. Swanson and T.M. McCalla. 1974. Soil profile conditions of cattle feedlots. Journal of Environmental Quality 3(1):14-17.
- Rowell, J.G., M.H. Miller and P.H. Groenevelt. 1985. Self-sealing of earthen manure storage ponds II. Rate and mechanism of sealing. Journal of Environmental Quality 14:539-543.
- Barrington, S.F. and C.A. Madramootoo. 1989. Investigating seal formation from manure infiltration into soils. Transactions of the ASAE 32(3):851-856.

Table 1. Summary of saturated hydraulic conductivity measurements initially and after 8 months.

Sampling Date	Sampling Location	Geometric Mean Hydraulic Conductivity (cm/sec)	Mean Hydraulic Conductivity (cm/sec)	Standard Deviation Hydraulic Conductivity	Moisture Content (% d.w.b.)	Dry Density (g/cm ³)
Initial	Apron	1.52E-05 a	3.10E-05	2.93E-05	2.8	1.85 a
	Water Trough	8.76E-06 ab	1.54E-05	1.19E-05	2.5	1.88 a
	Bottom	3.07E-05 a	3.82E-05	2.58E-05	3.5	1.92 a
8 Months	Apron	7.81E-07 cd	1.15E-06	5.95E-07	8.8	1.74 b
	Water Trough	2.62E-06 bc	3.28E-06	2.15E-06	12.0	1.74 b
	Bottom	4.65E-07 d	8.00E-07	6.78E-07	12.0	1.84 a

Using LSD comparisons, means within a column with different letters are significantly different at $\alpha=0.05$.

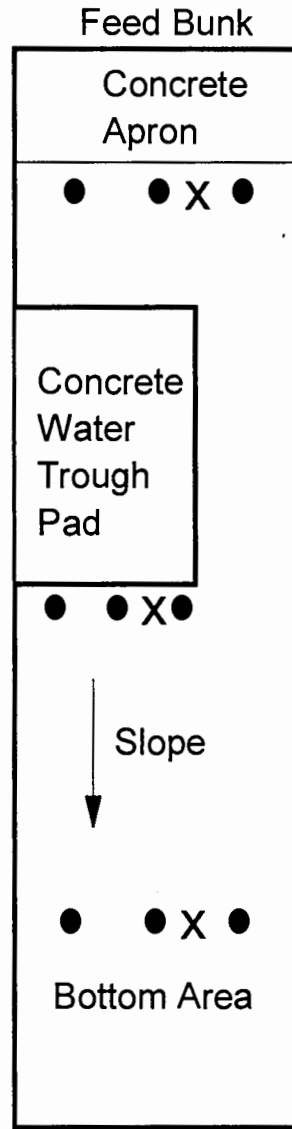

- Soil core for hydraulic conductivity
- X Soil boring for chemical testing

Figure 1. Sample locations for soil cores and soil borings.

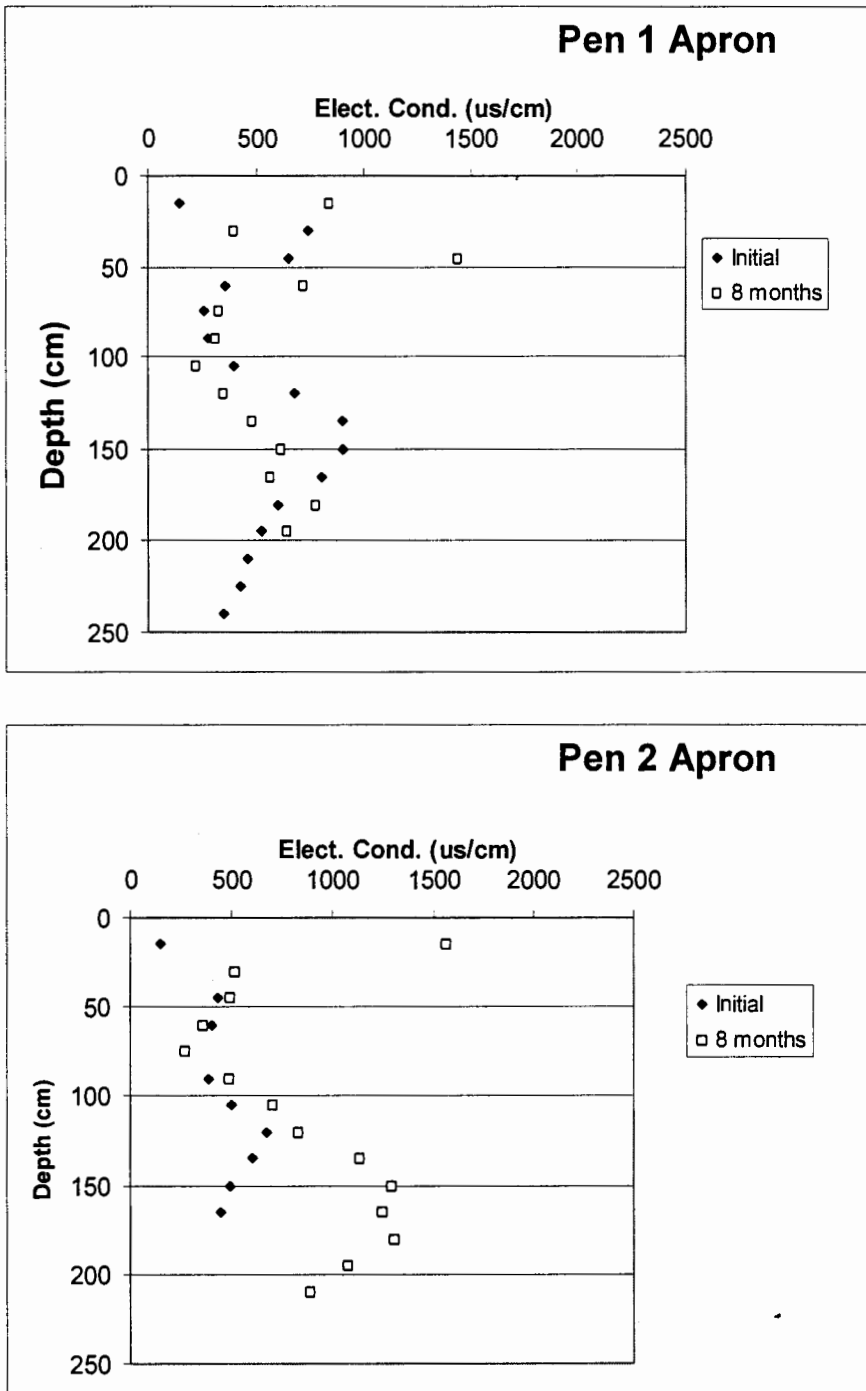


Figure 2. Graphs of soil electrical conductivity with depth for apron area.

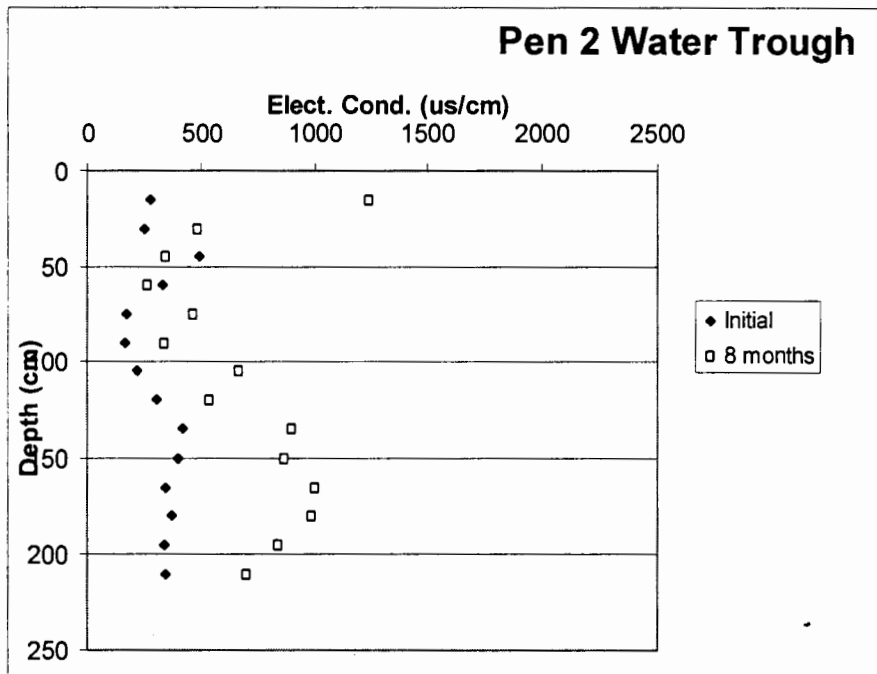
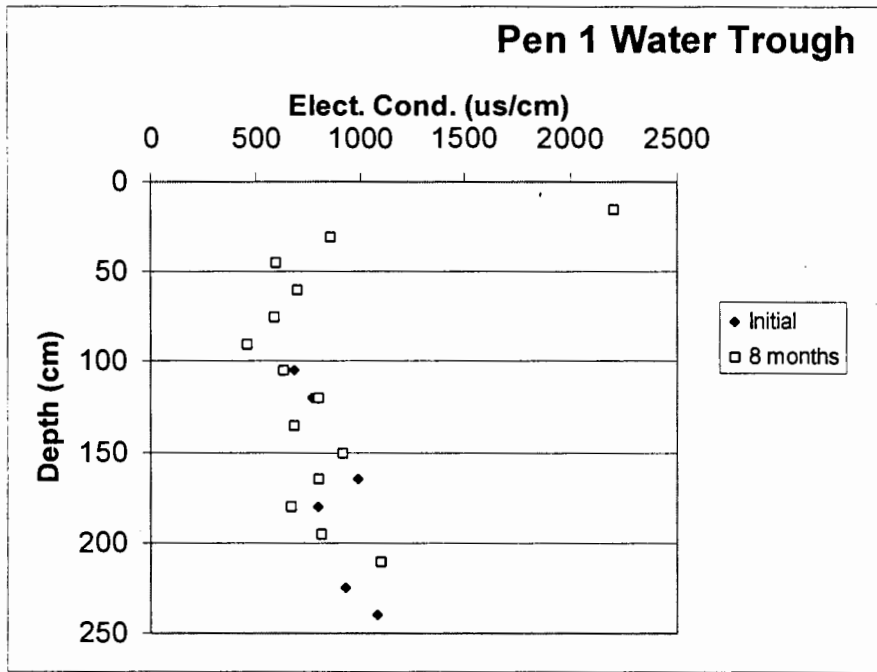


Figure 3. Graphs of soil electrical conductivity with depth for water trough area.

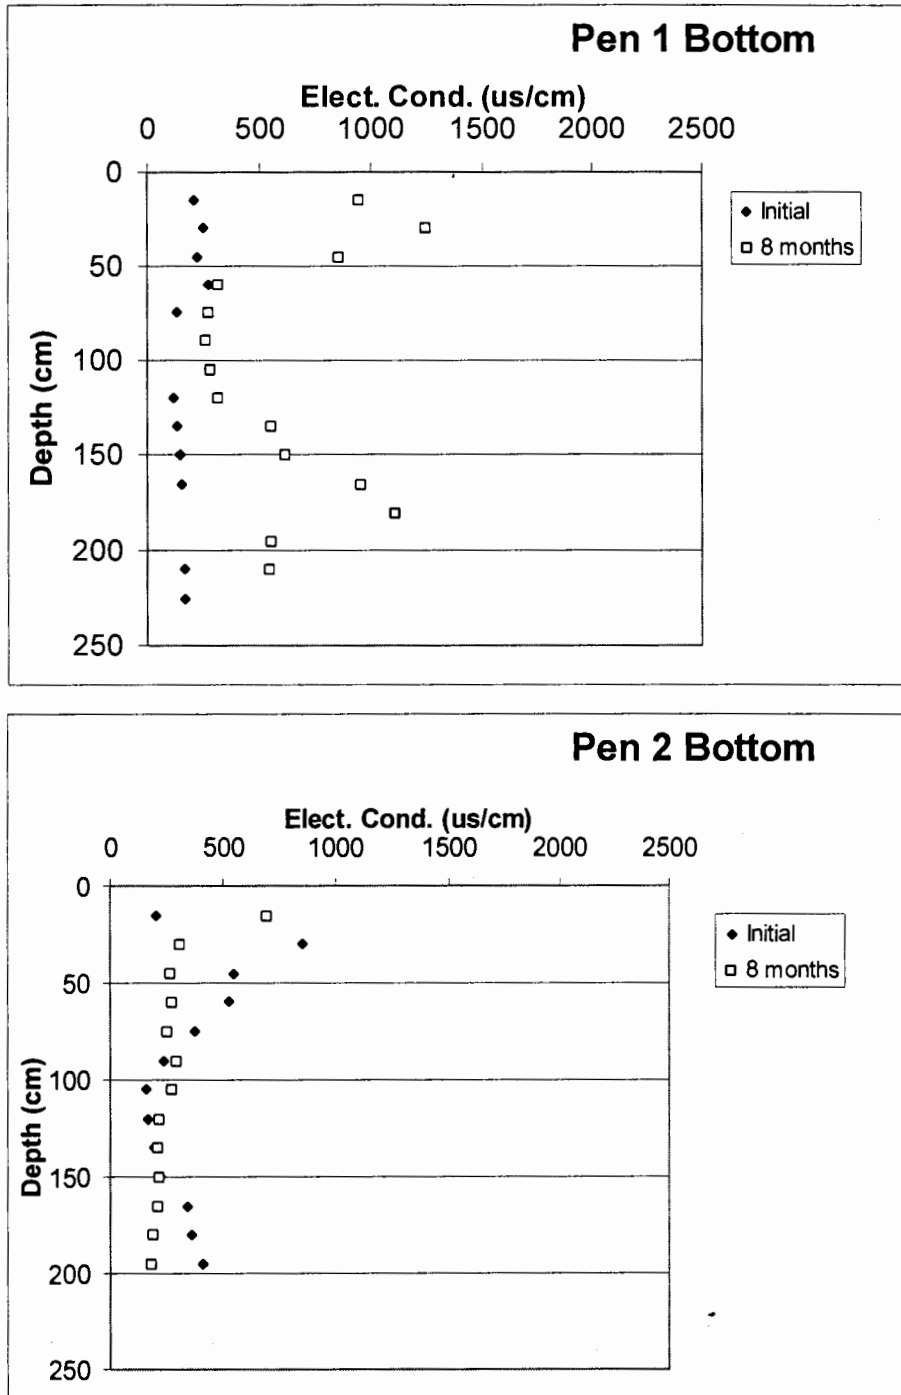


Figure 4. Graphs of soil electrical conductivity with depth for bottom area.

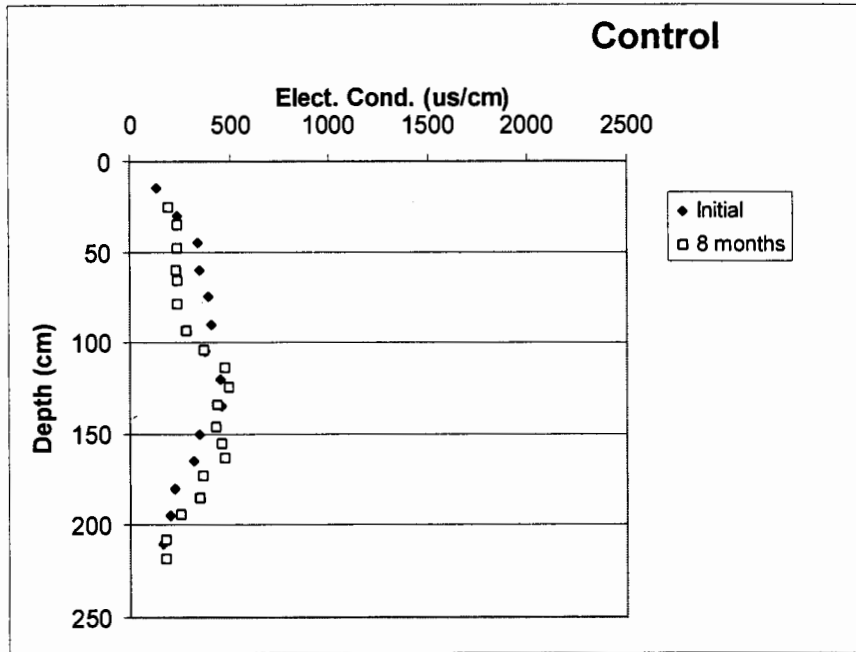


Figure 5. Graph of soil electrical conductivity with depth for the control area outside of the feedlot pens.