


Appendix 1 – Maps



Map updated October 7, 2016

Highland Bayou Watershed (WPP)
 Marchand Bayou Watershed (WPP)
 Coastal Basin
 Diversionary Canal
 Marchand Bayou
 TX City Ship Channel
 Moses Lake & Bayous
 City Limits

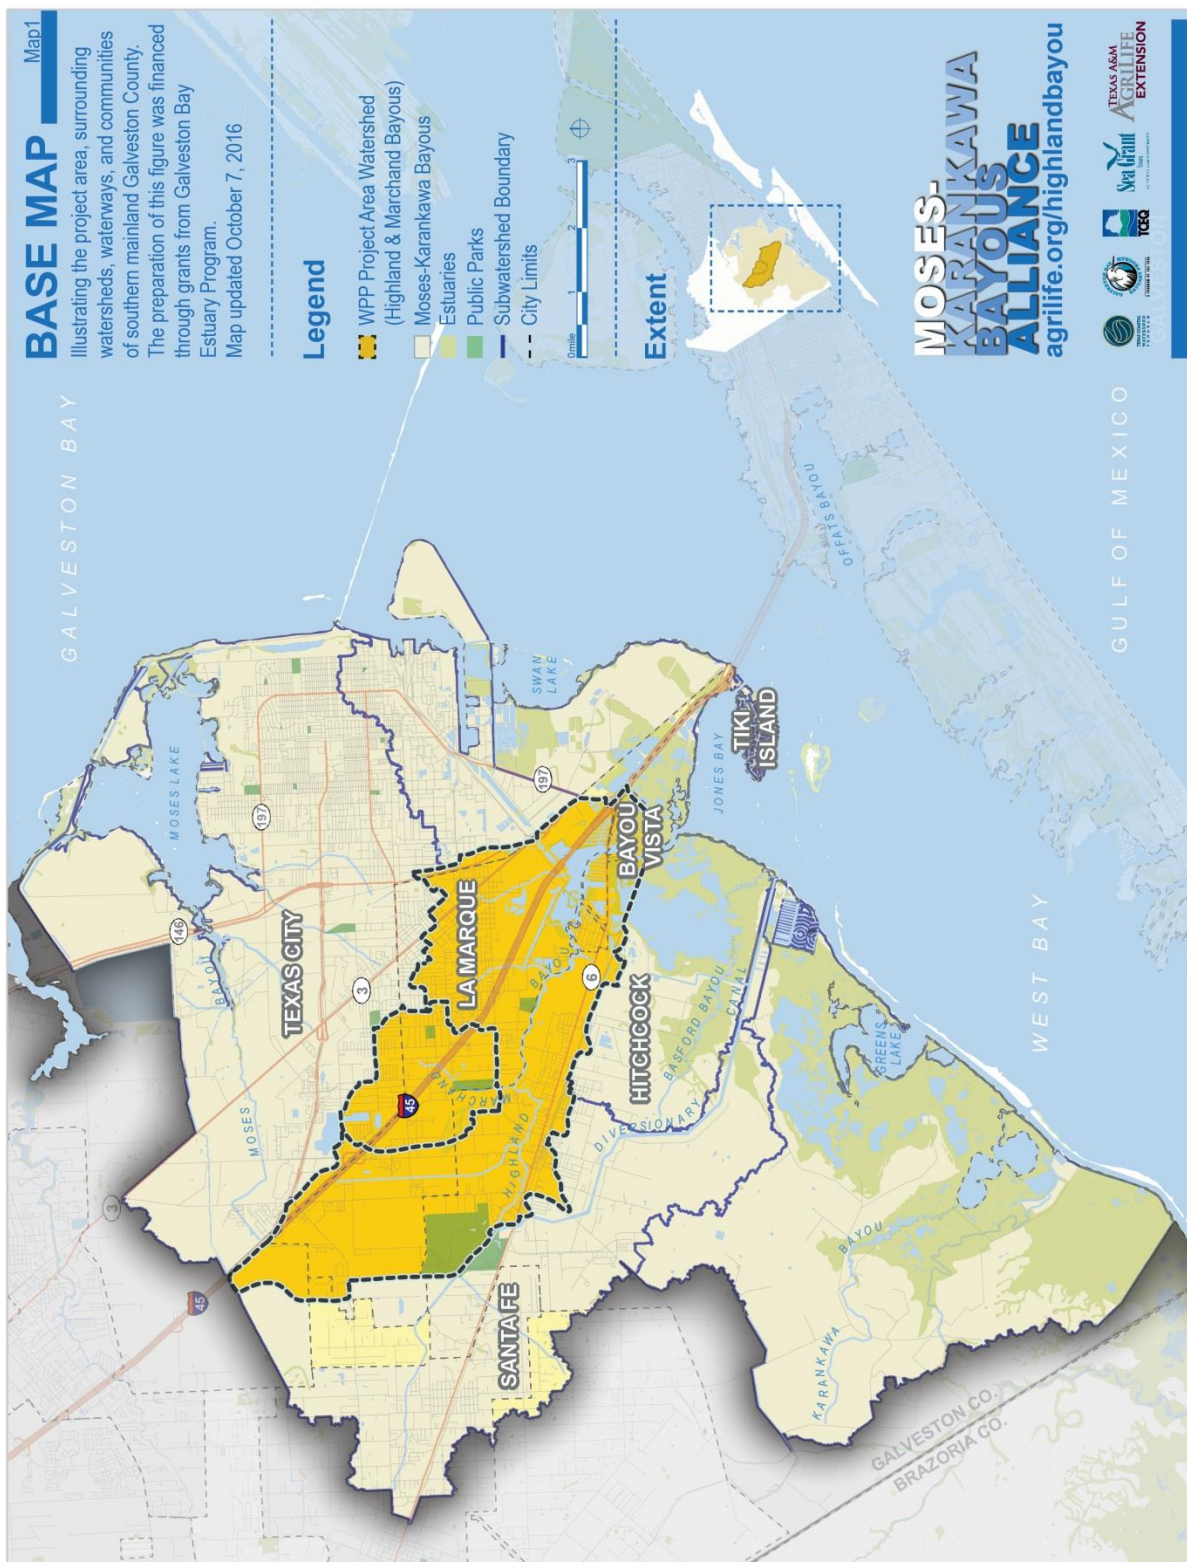



A map of the Pacific Northwest region of North America, showing the coastline from British Columbia, Canada, down to Washington and Oregon, USA. A dashed blue box highlights the study area in the Strait of Georgia, between Vancouver Island and the mainland.



Map3



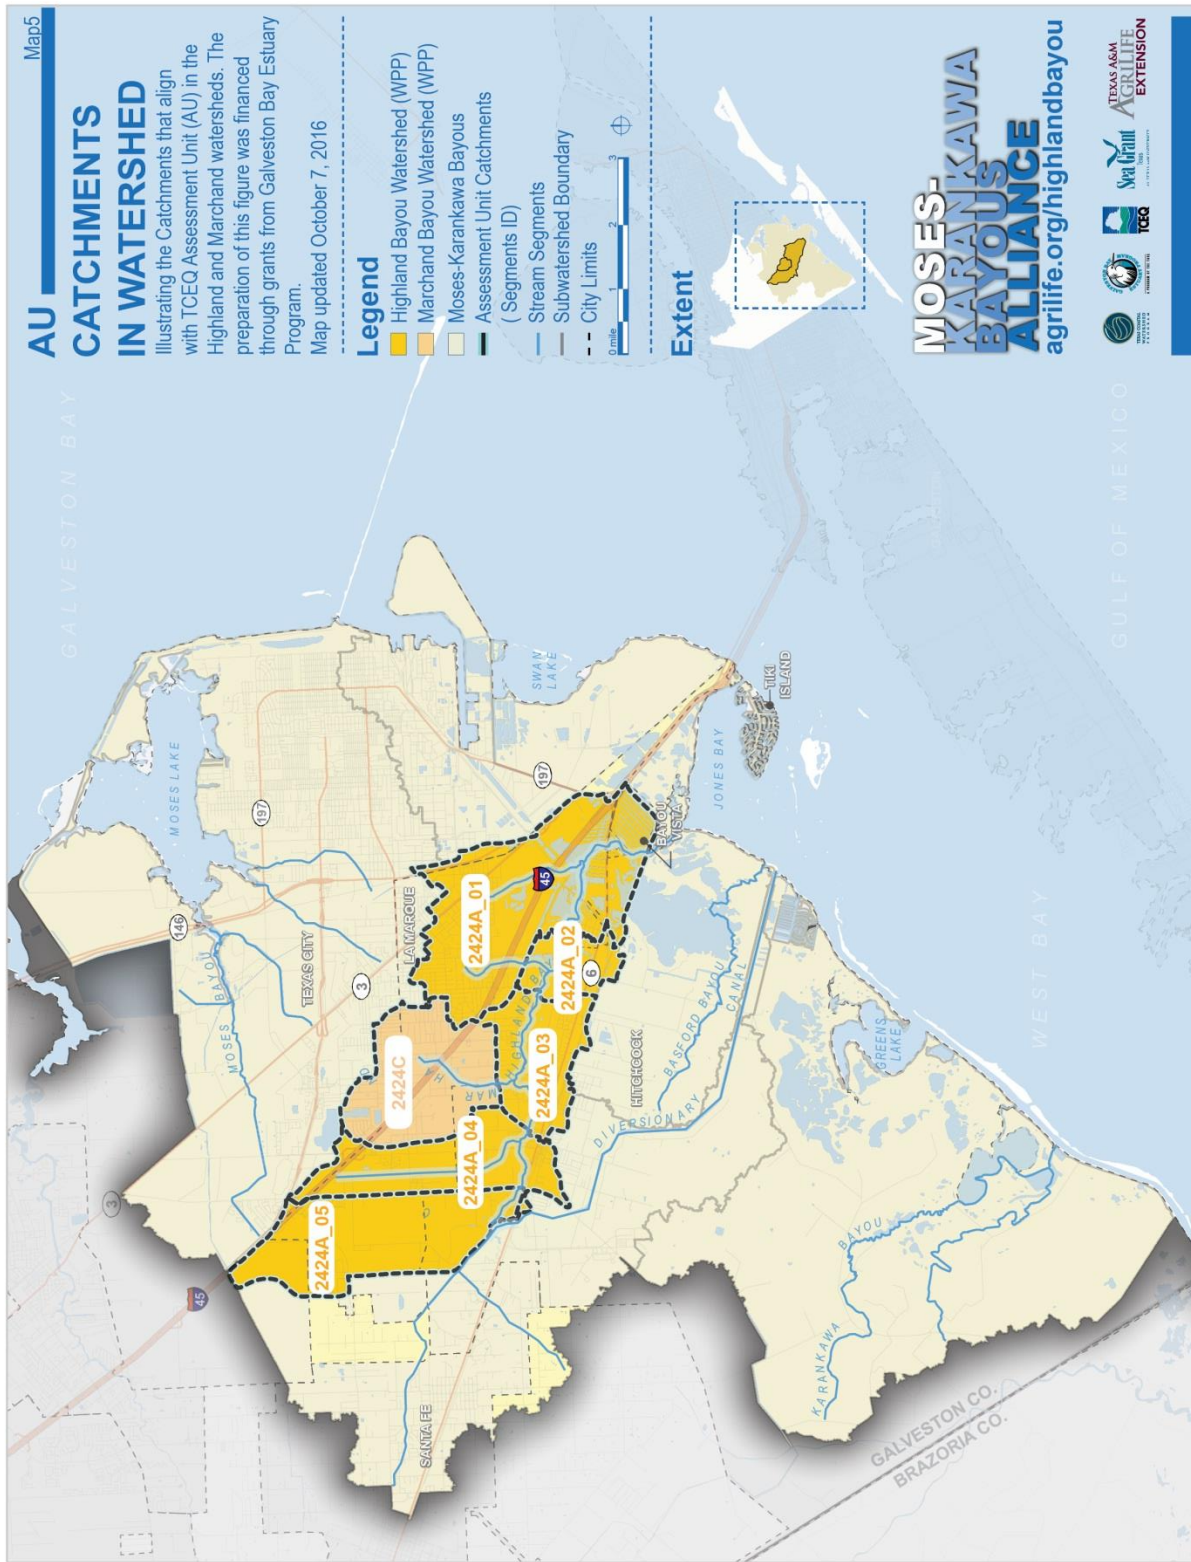

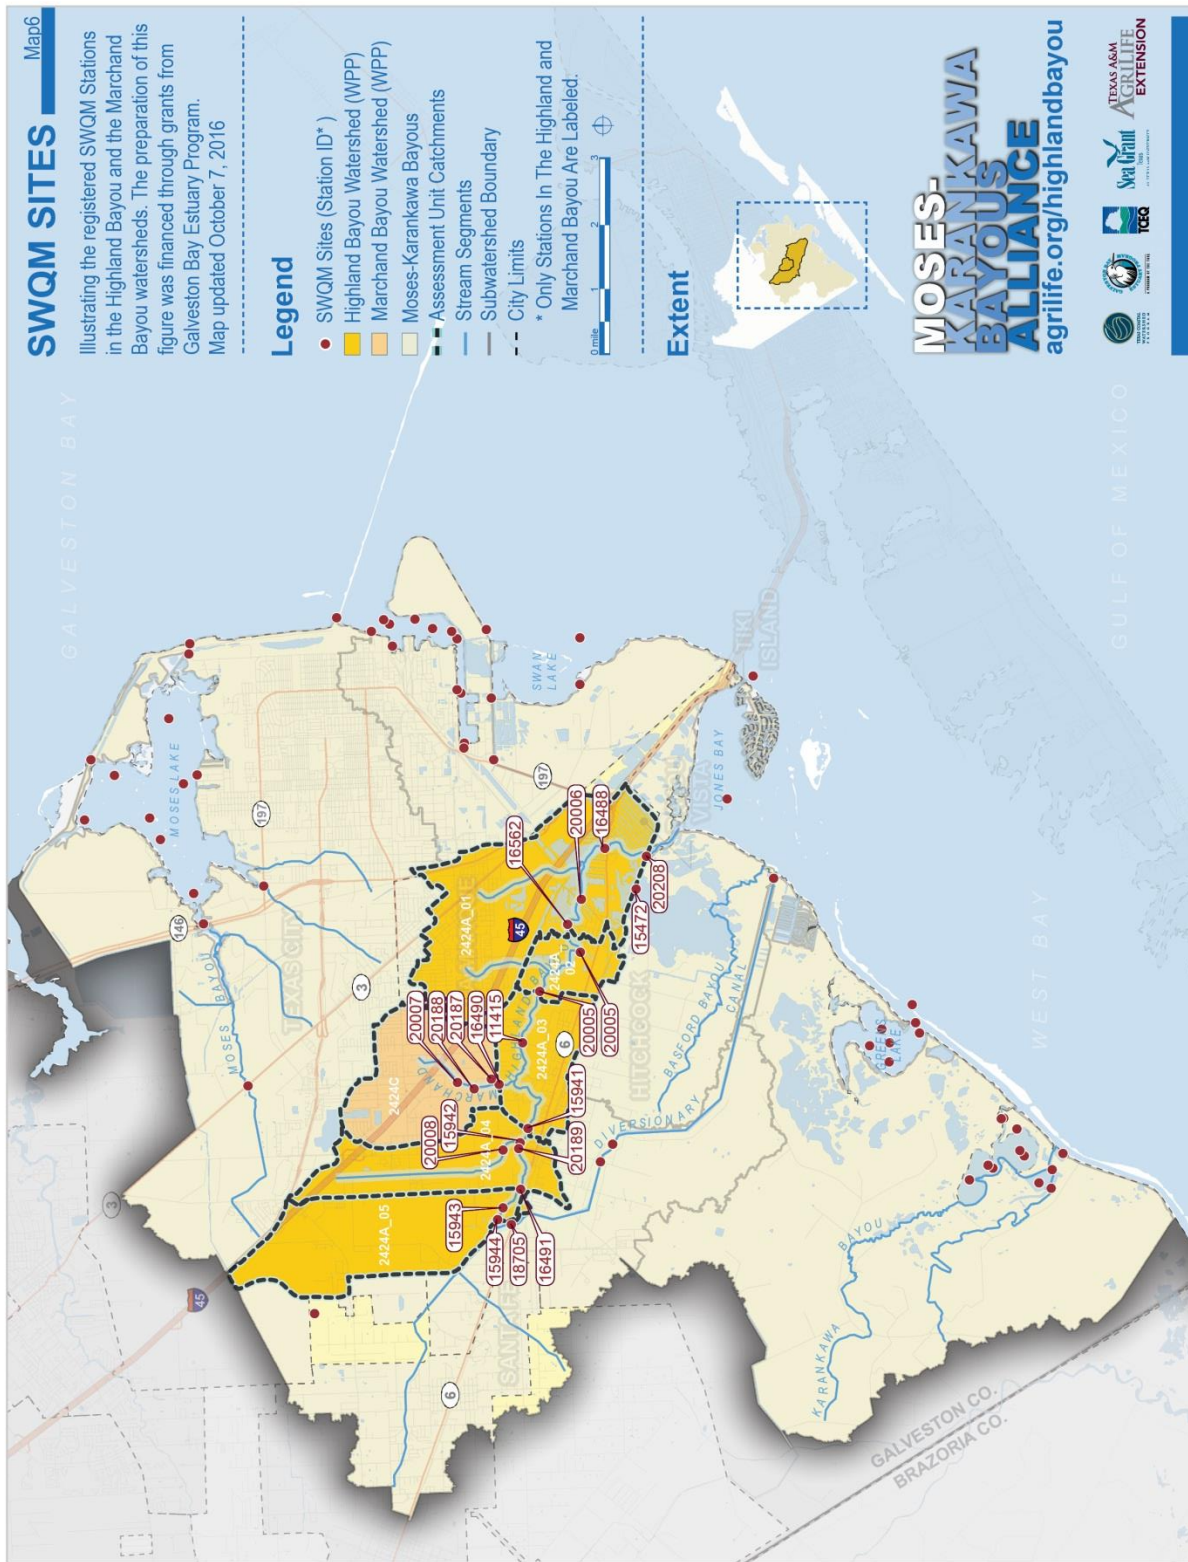


Map8

Illustrating the ecological features of the MoKa Bayous Coastal Basin. The preparation of this figure was financed through grants from Galveston Bay Estuary Program.

Map updated October 7, 2016

Legend


- Coastal Prairie, High Quality
Coastal Prairie, Medium Quality
Coastal Prairie, Low Quality
Tidal Wetlands
Moses-Karankawa Bayous
WPP Project Area Boundary
Subwatershed Boundary
City Limits

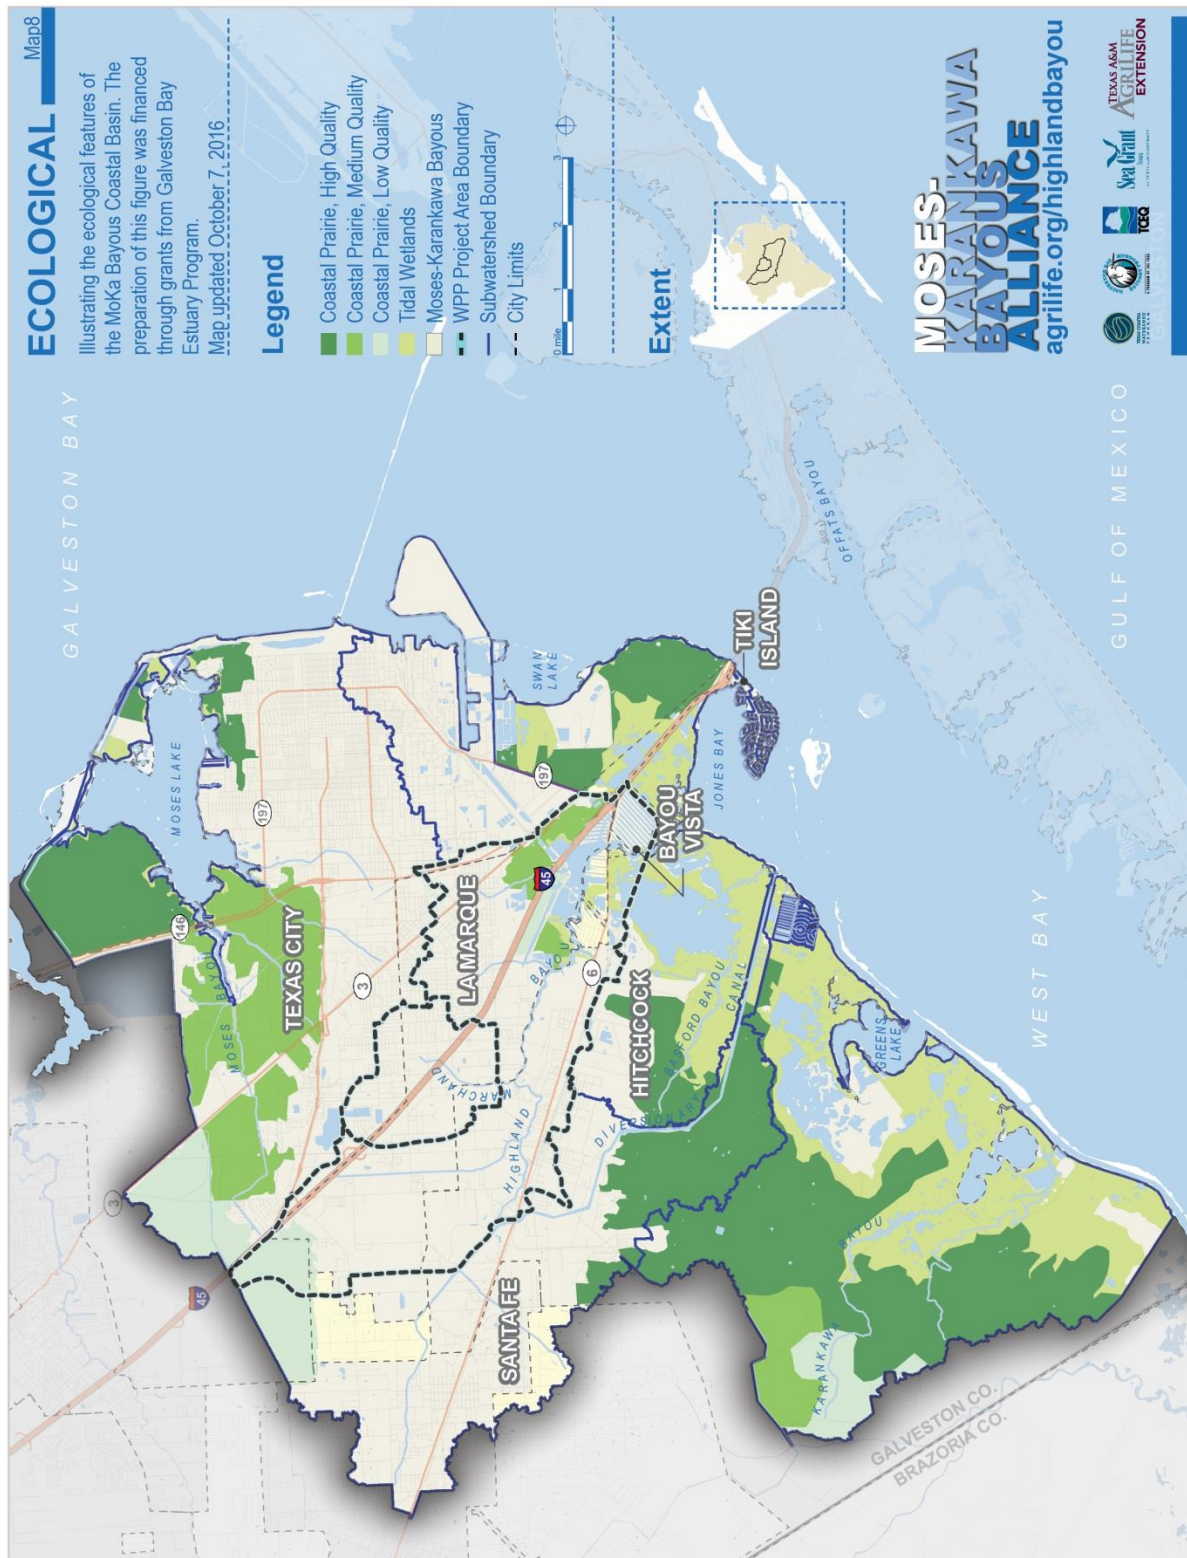

**MOSES-
KARANKAWA
BAYOU
ALLIANCE**
agrifile.org/highlandbayou

agrilife.org/highlandbayou



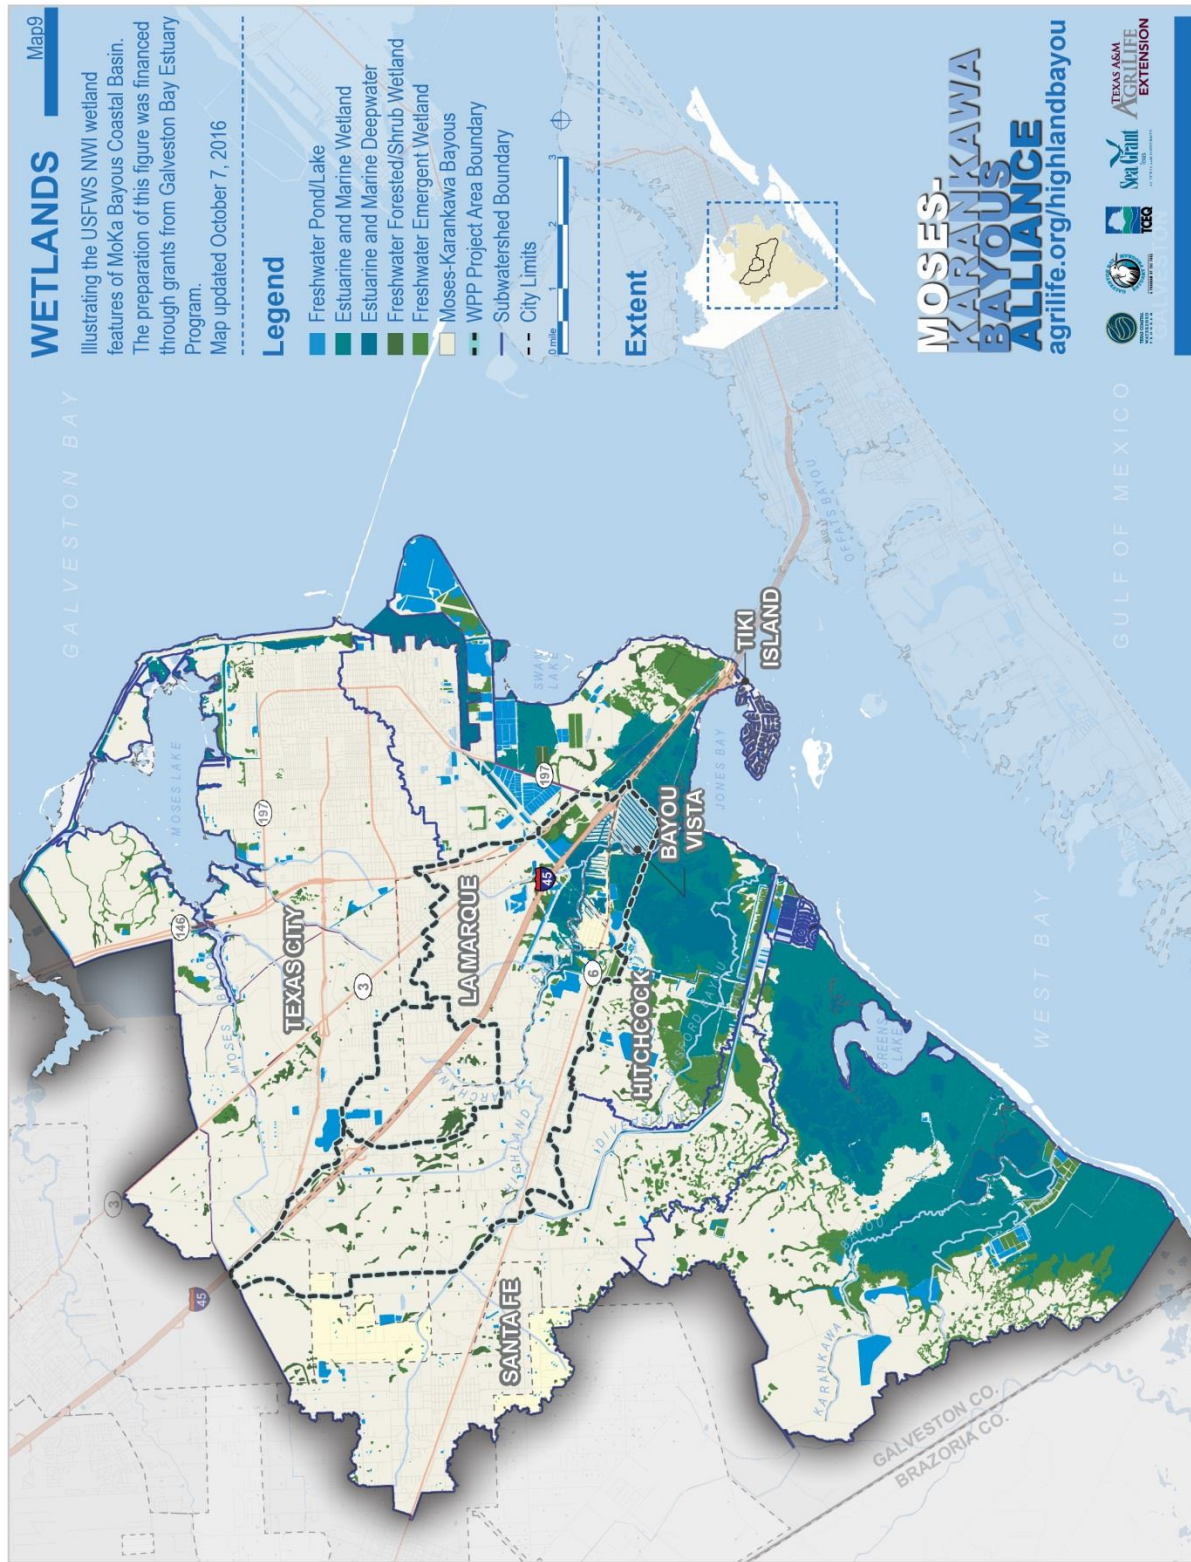

Map10

Map updated October 7, 2016

Population Density (Persons / Acre)



- - - City Limits




Extent



agrillife.org/highlandbayou



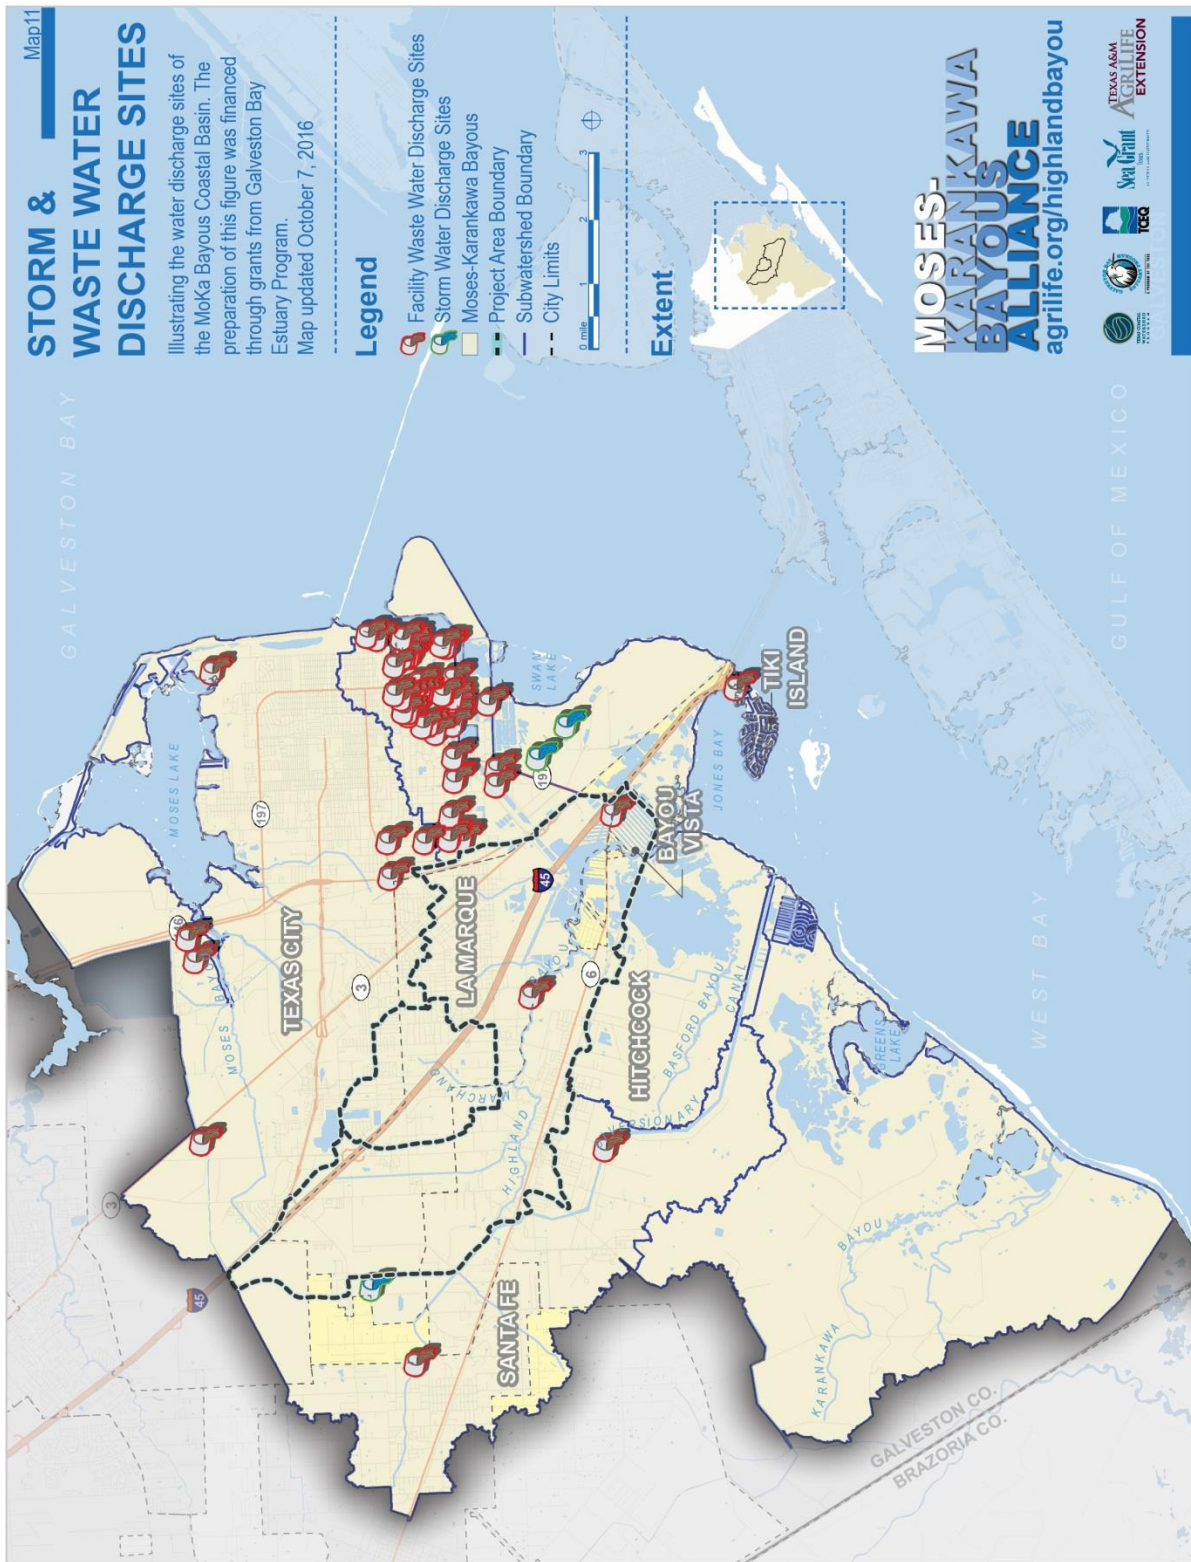

Illustrating the On Site Sewage Facilities (OSSF) of the MoKa Bayous Coastal Basin. The preparation of this figure was financed through grants from Galveston Bay Estuary Program.
Map updated October 7, 2016



Extent



**MOSES-
KARANKAWA
BAYOU
ALLIANCE**
agrillife.org/highlandbayou



Map13

Illustrating the USDA Soil Services soil drainage type of the MoKa Bayous Coastal Basin. The preparation of this figure was financed through grants from Galveston Bay Estuary Program.


Map updated October 7, 2016


Legend


- Poorly or Very Poorly Drained (D*)
 Somewhat Poorly Drained (C*)
 Moderately to Well Drained (B*)
 WPP Project Area Boundary
 Subwatershed Boundary
 City Limits
 * Hydrologic soil groups


Extent




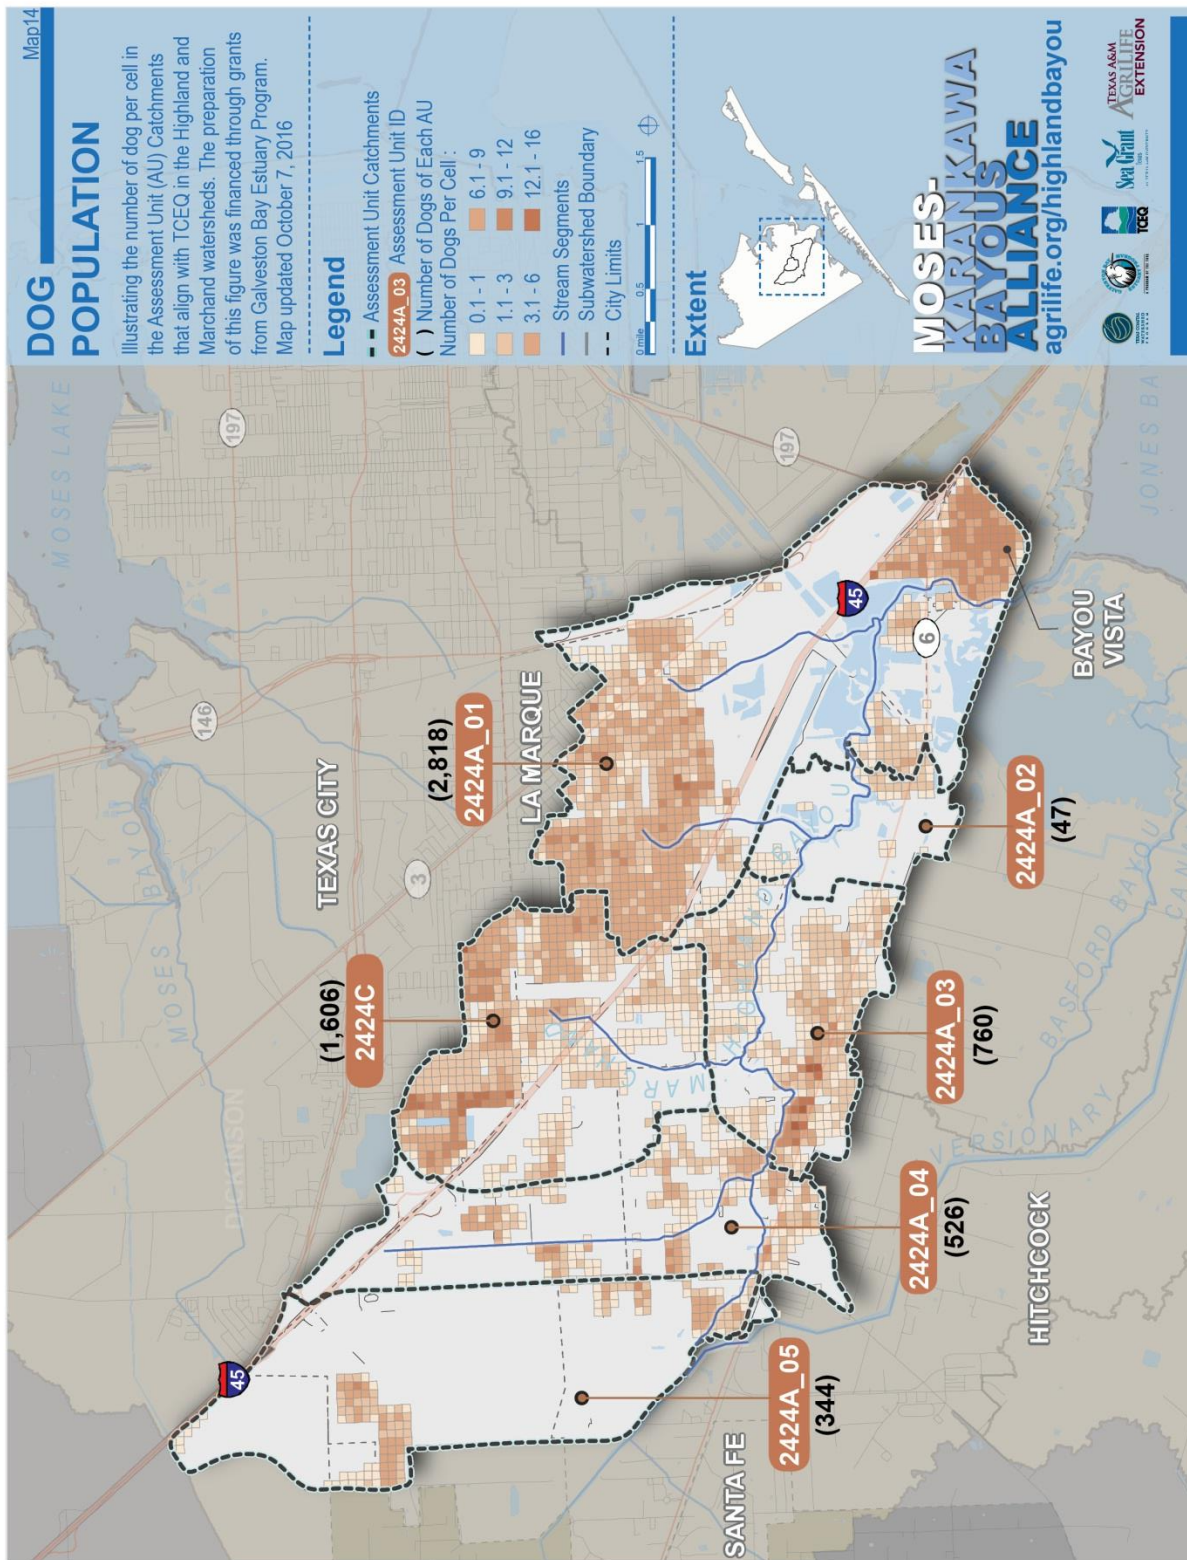


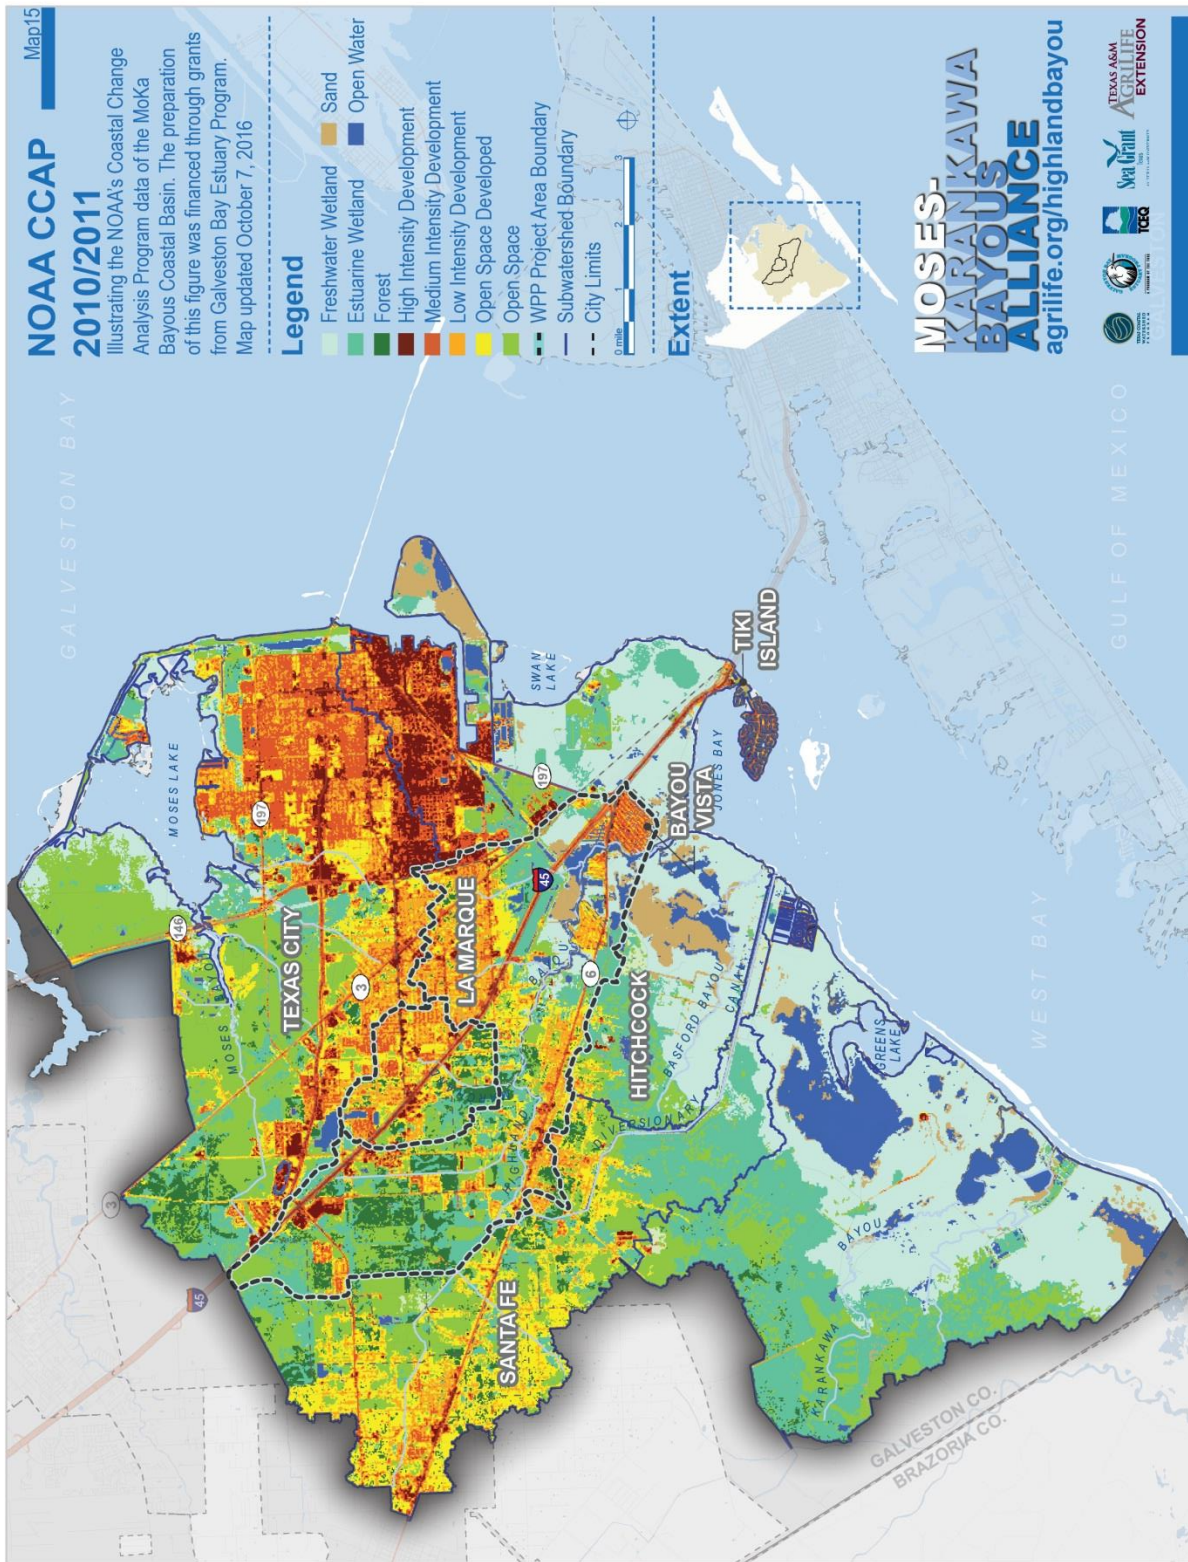


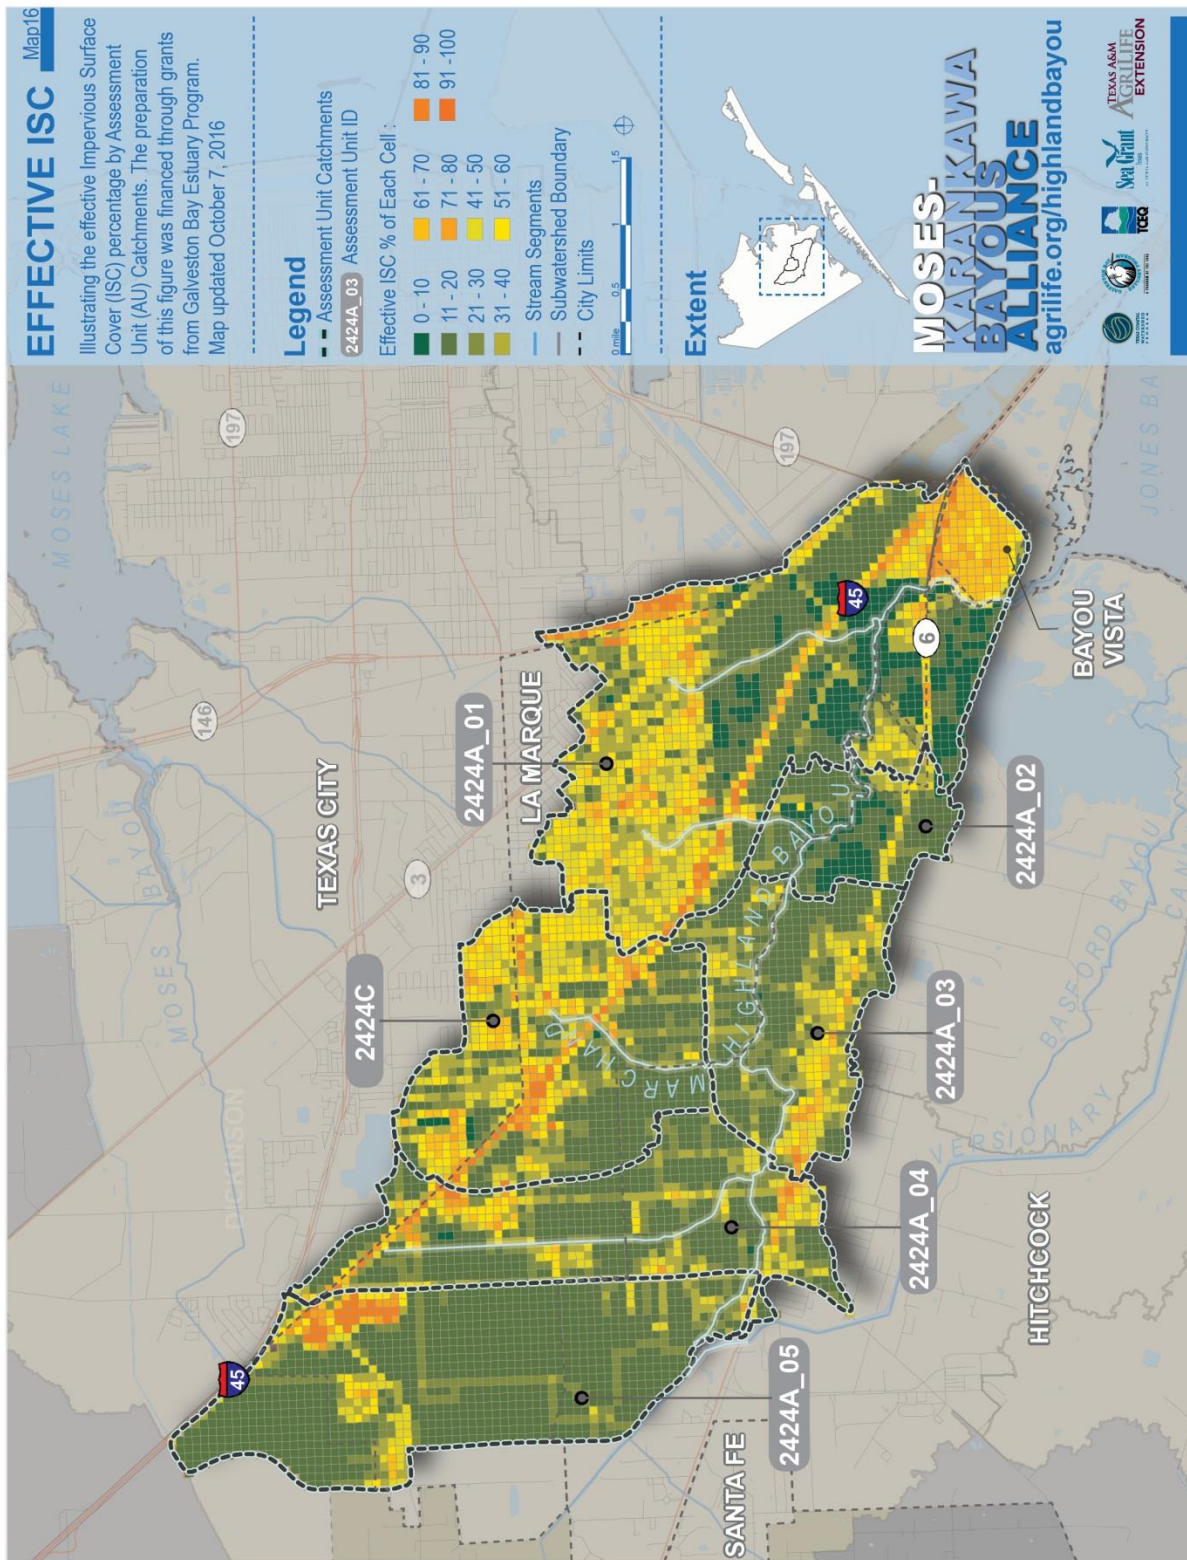


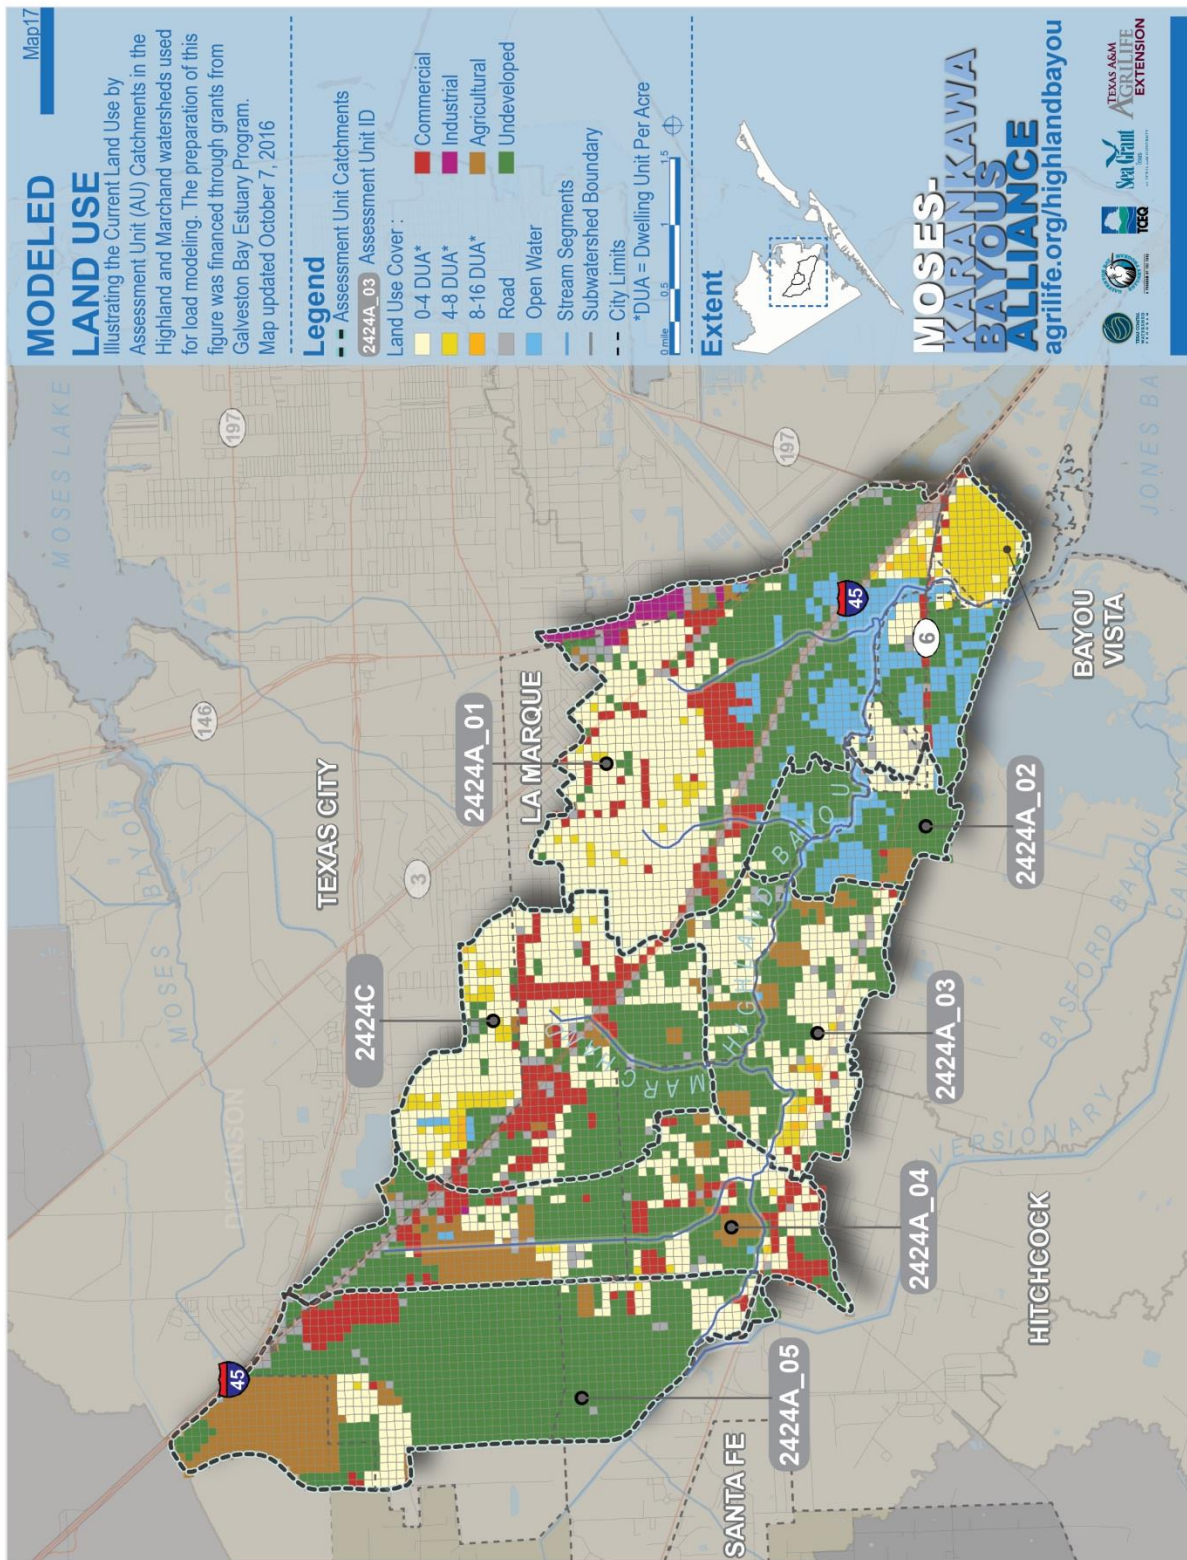


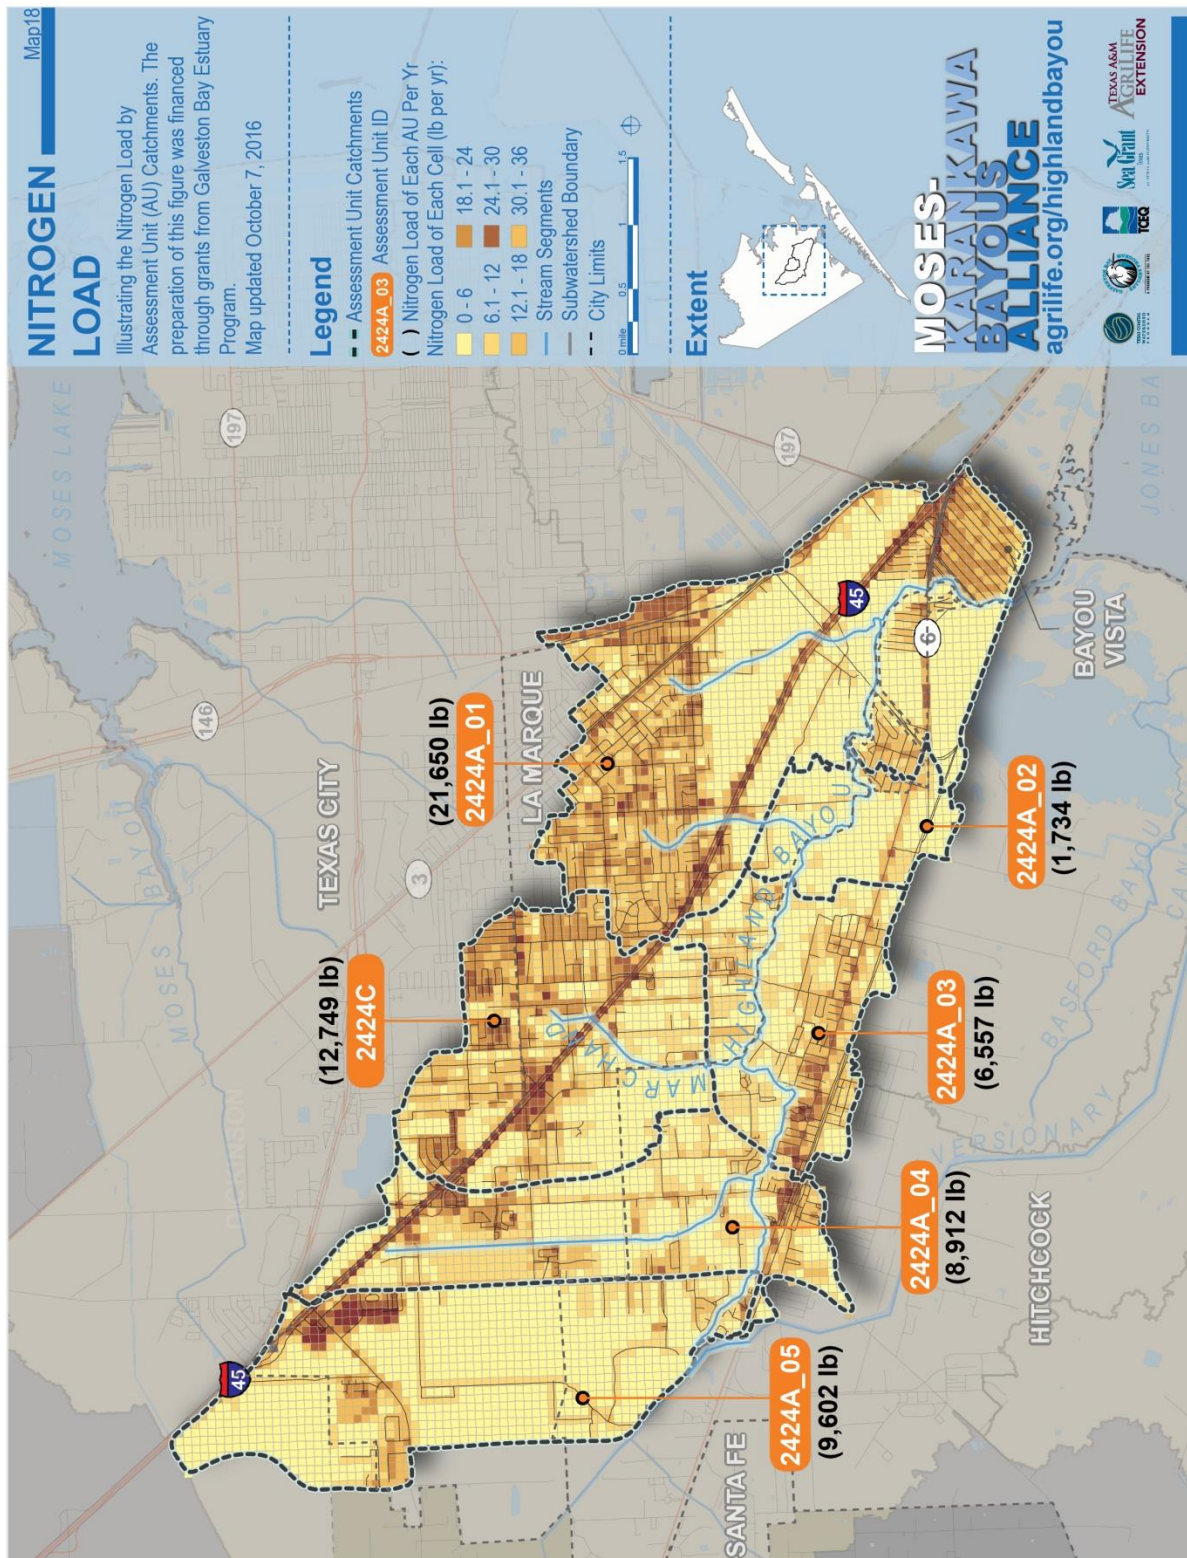

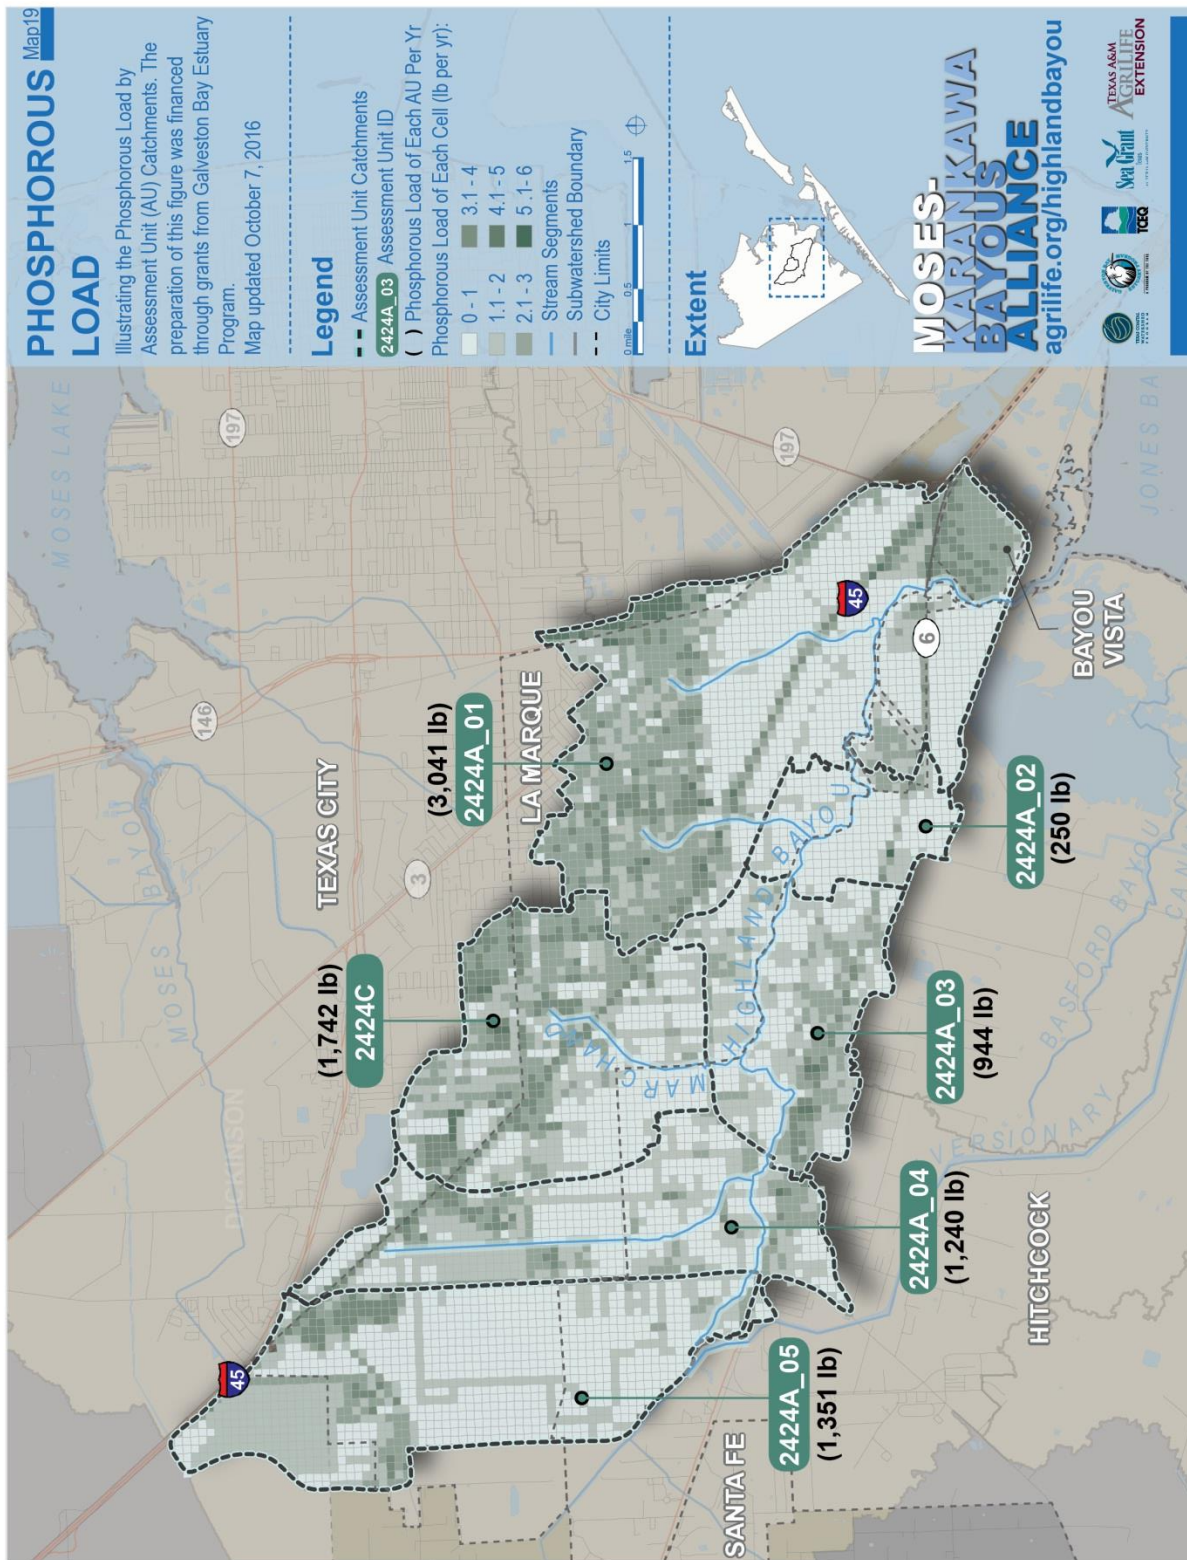

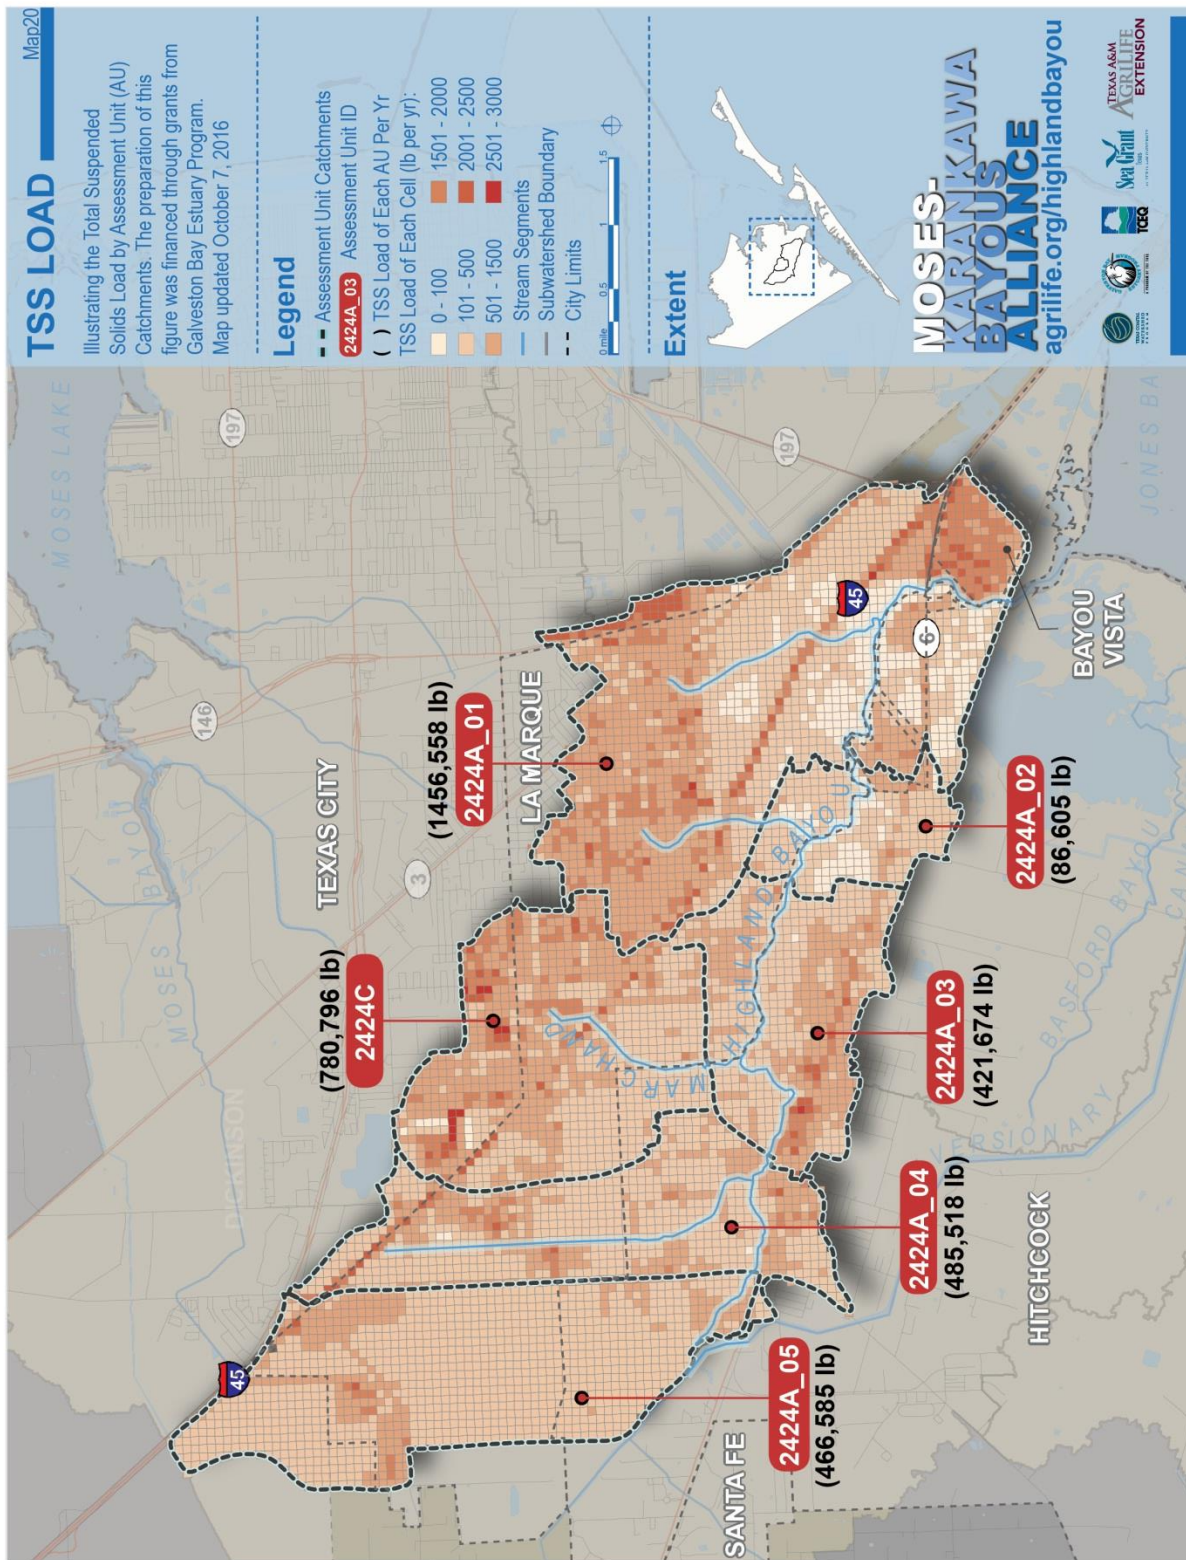

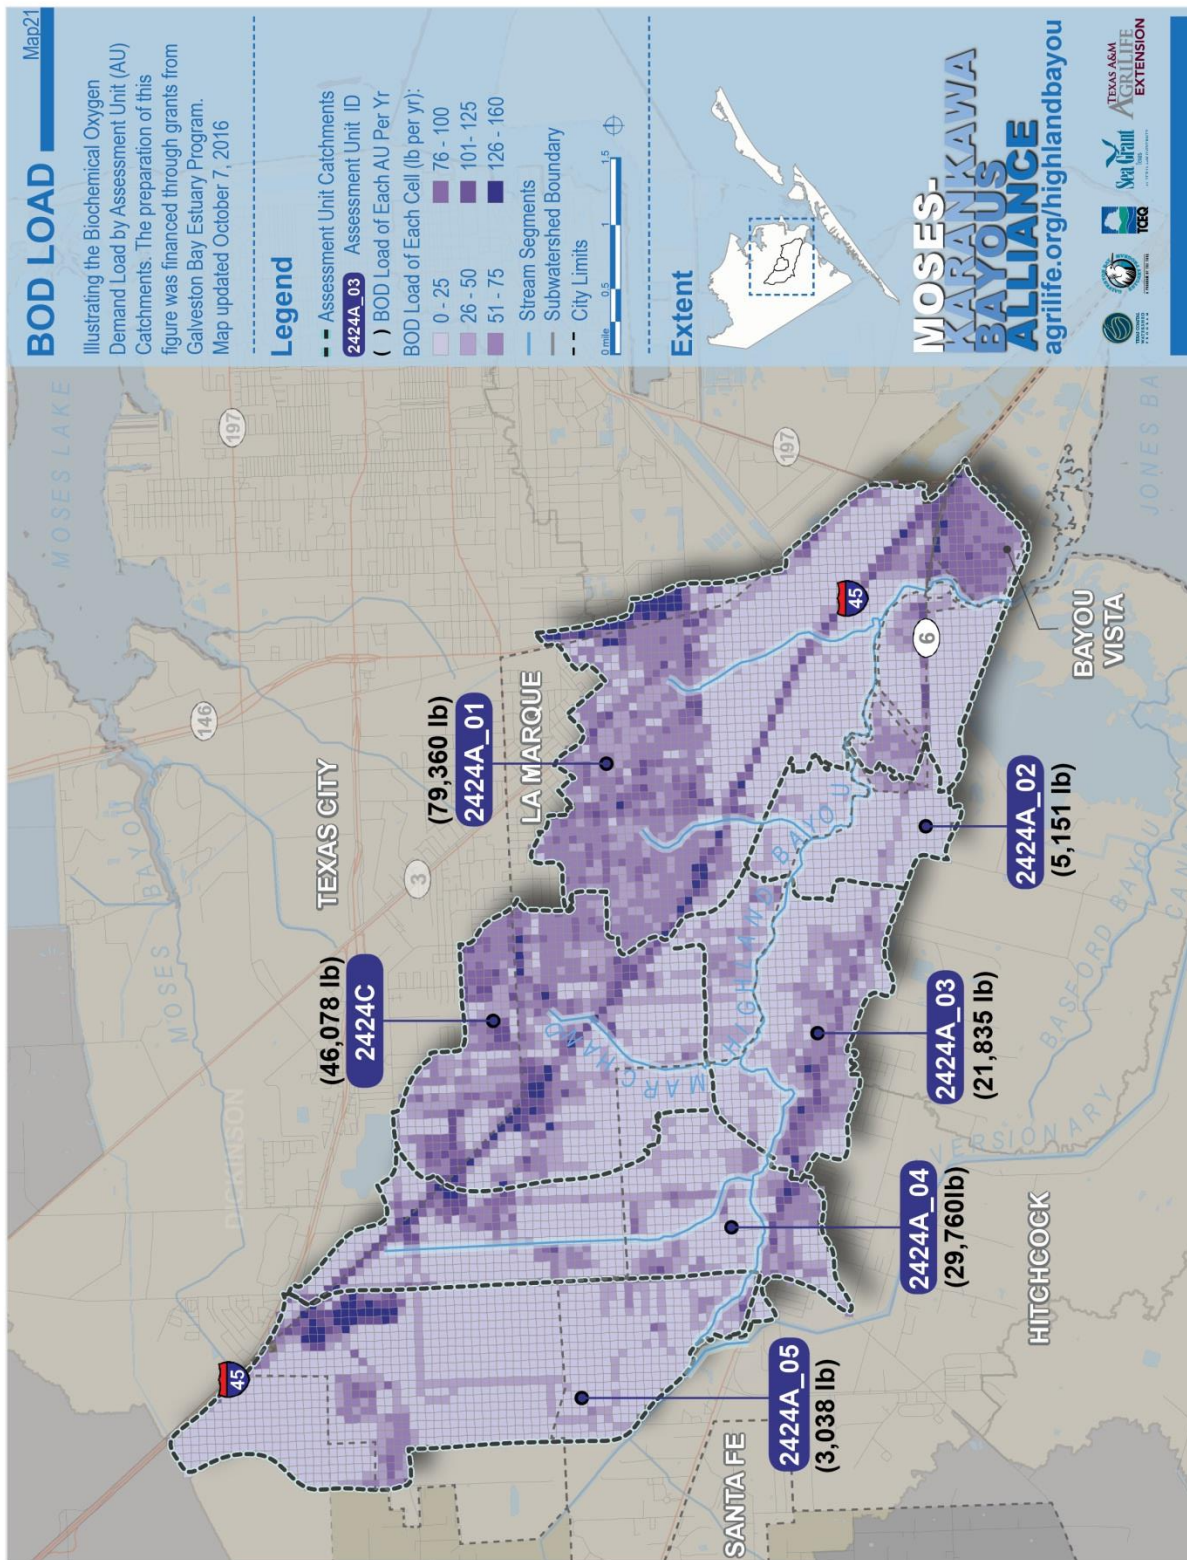

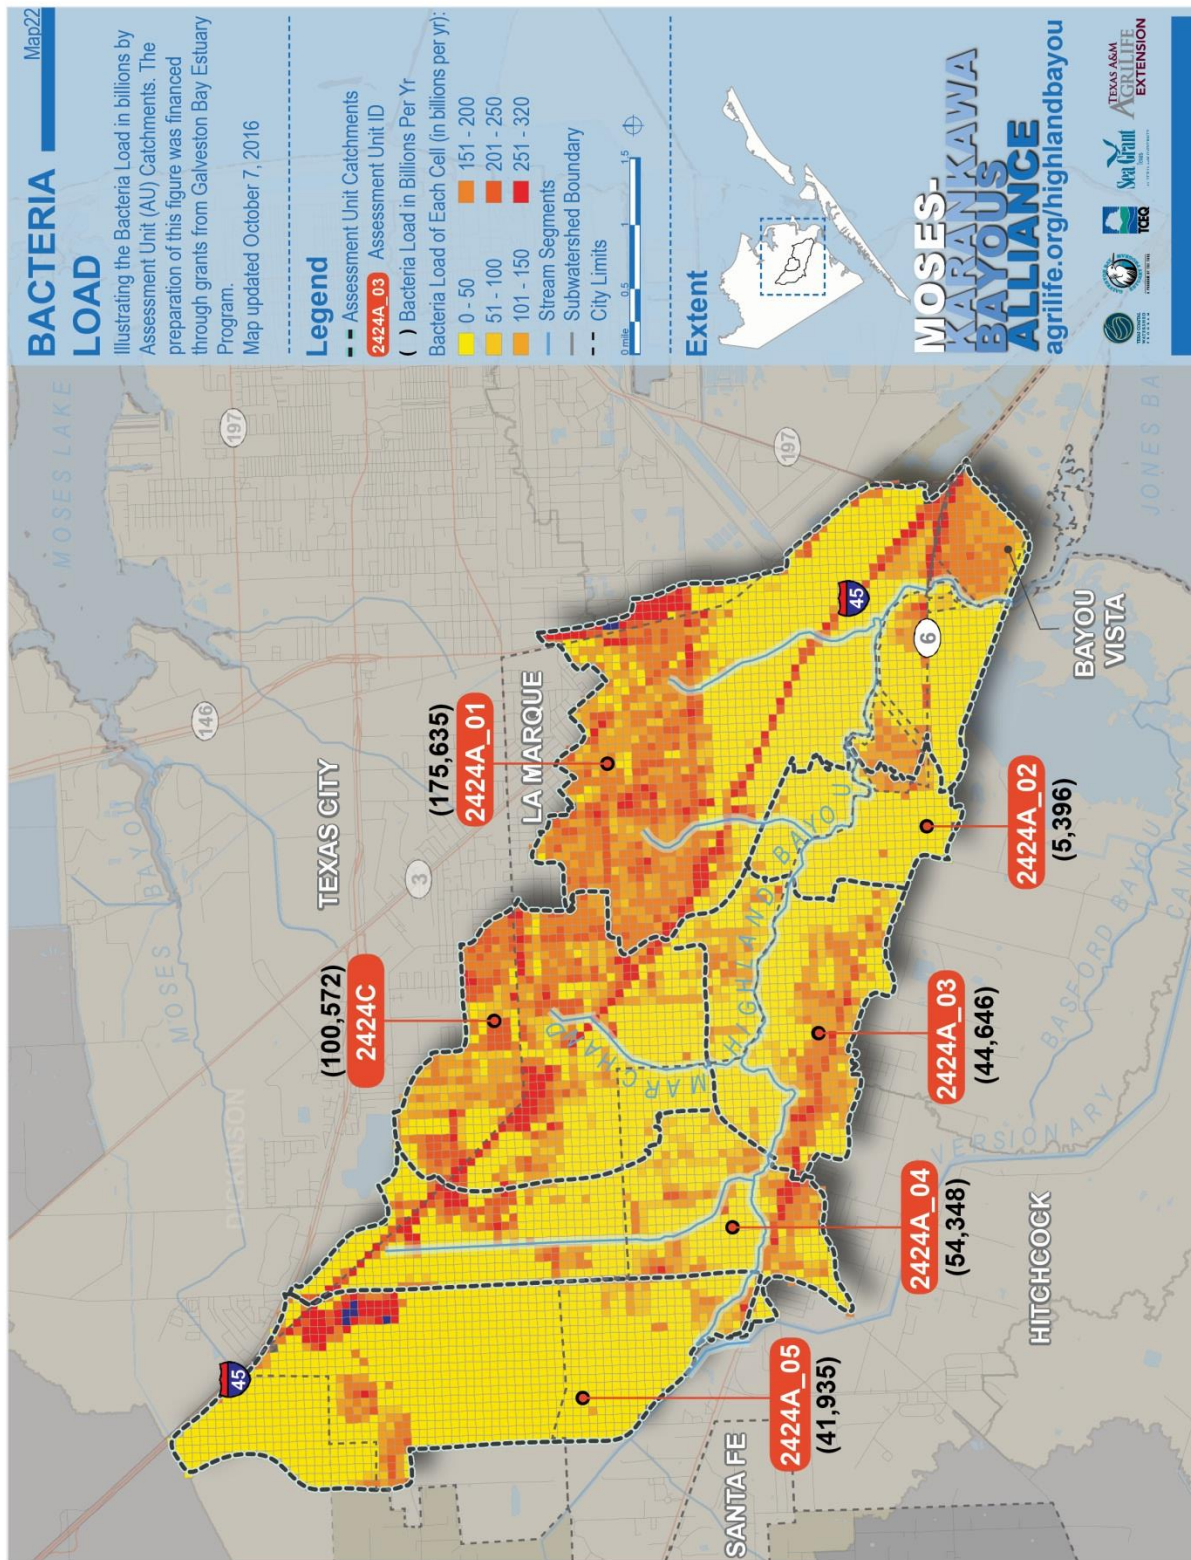

**PROPOSED
WATER QUALITY
MONITORING SITES**

Illustrating the proposed water quality monitoring sites in the Highland Bayou and the Marchand Bayou watersheds. The preparation of this figure was financed through grants from Galveston Bay Estuary Program.

Map updated October 7, 2016

Legend


- Proposed Monitoring Sites (SWQM ID)
- Highland Bayou Watershed (WPP)
- Marchand Bayou Watershed (WPP)
- Moses-Karankawa Bayous
- Assessment Unit Catchments
- Stream Segments
- Subwatershed Boundary
- City Limits


Extent



**MOSES-
KARANKAWA
BAYOU
ALLIANCE**
agrillife.org/highlandbayou



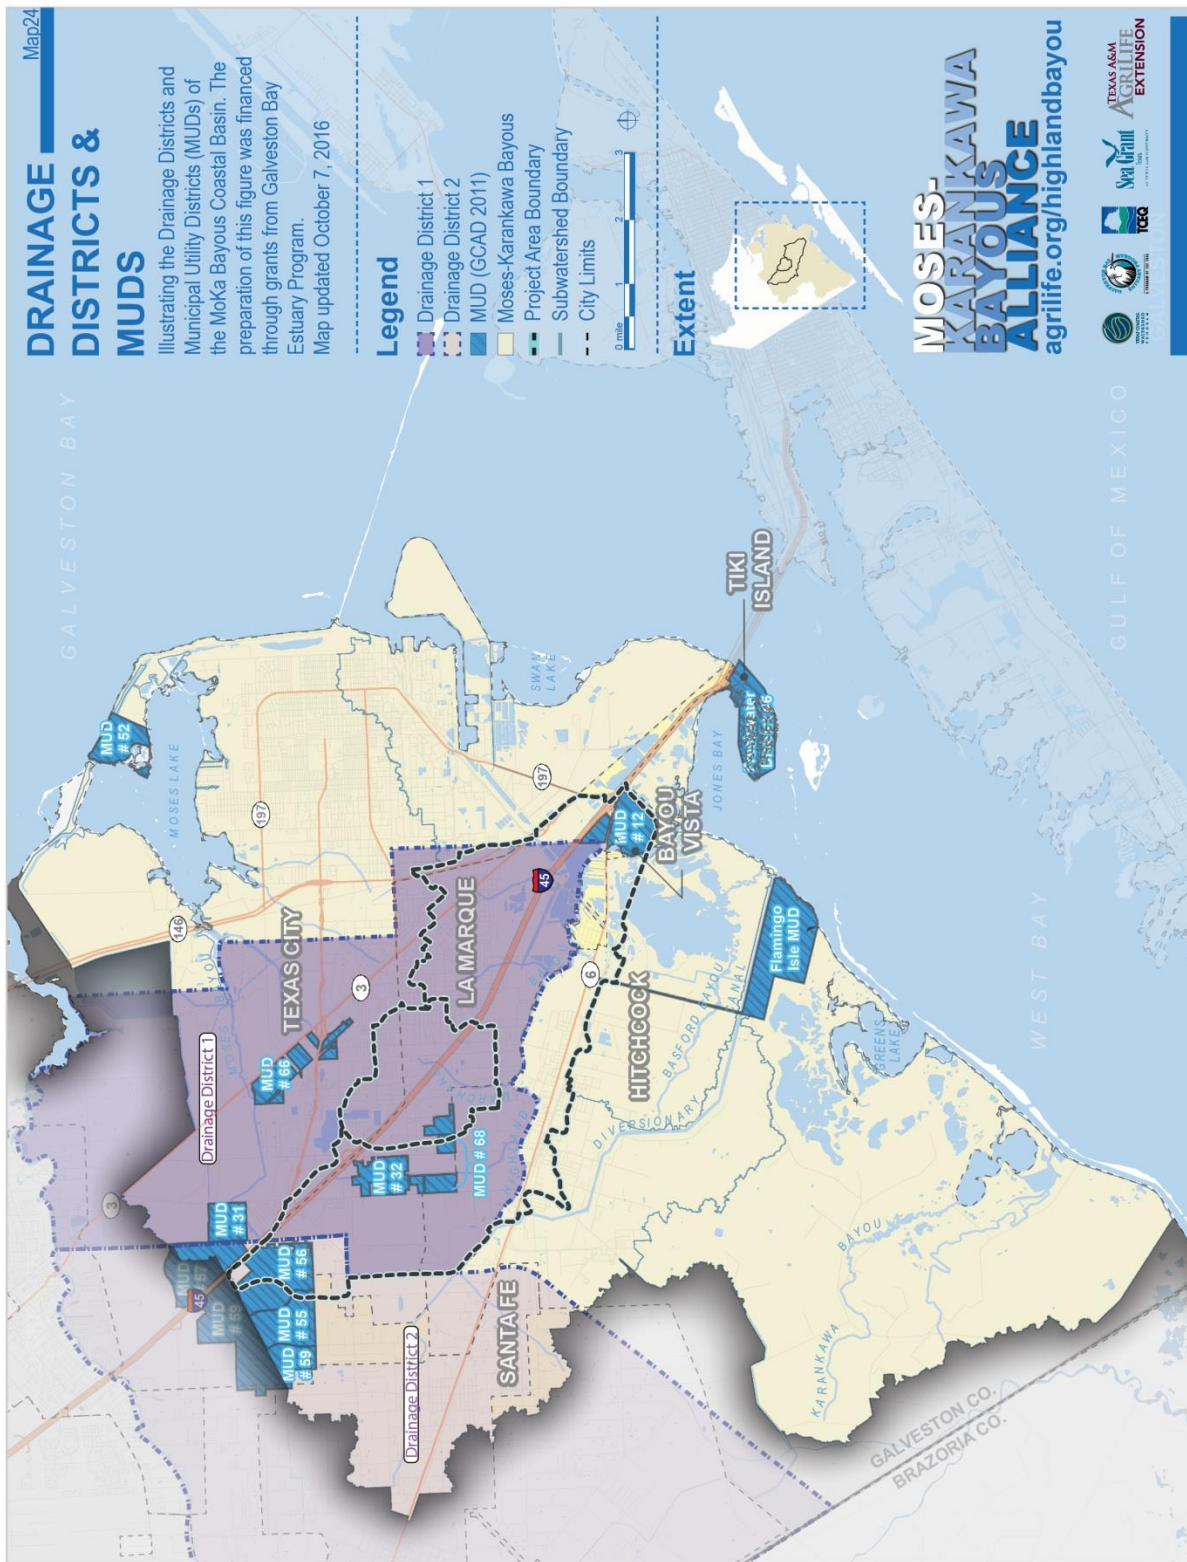

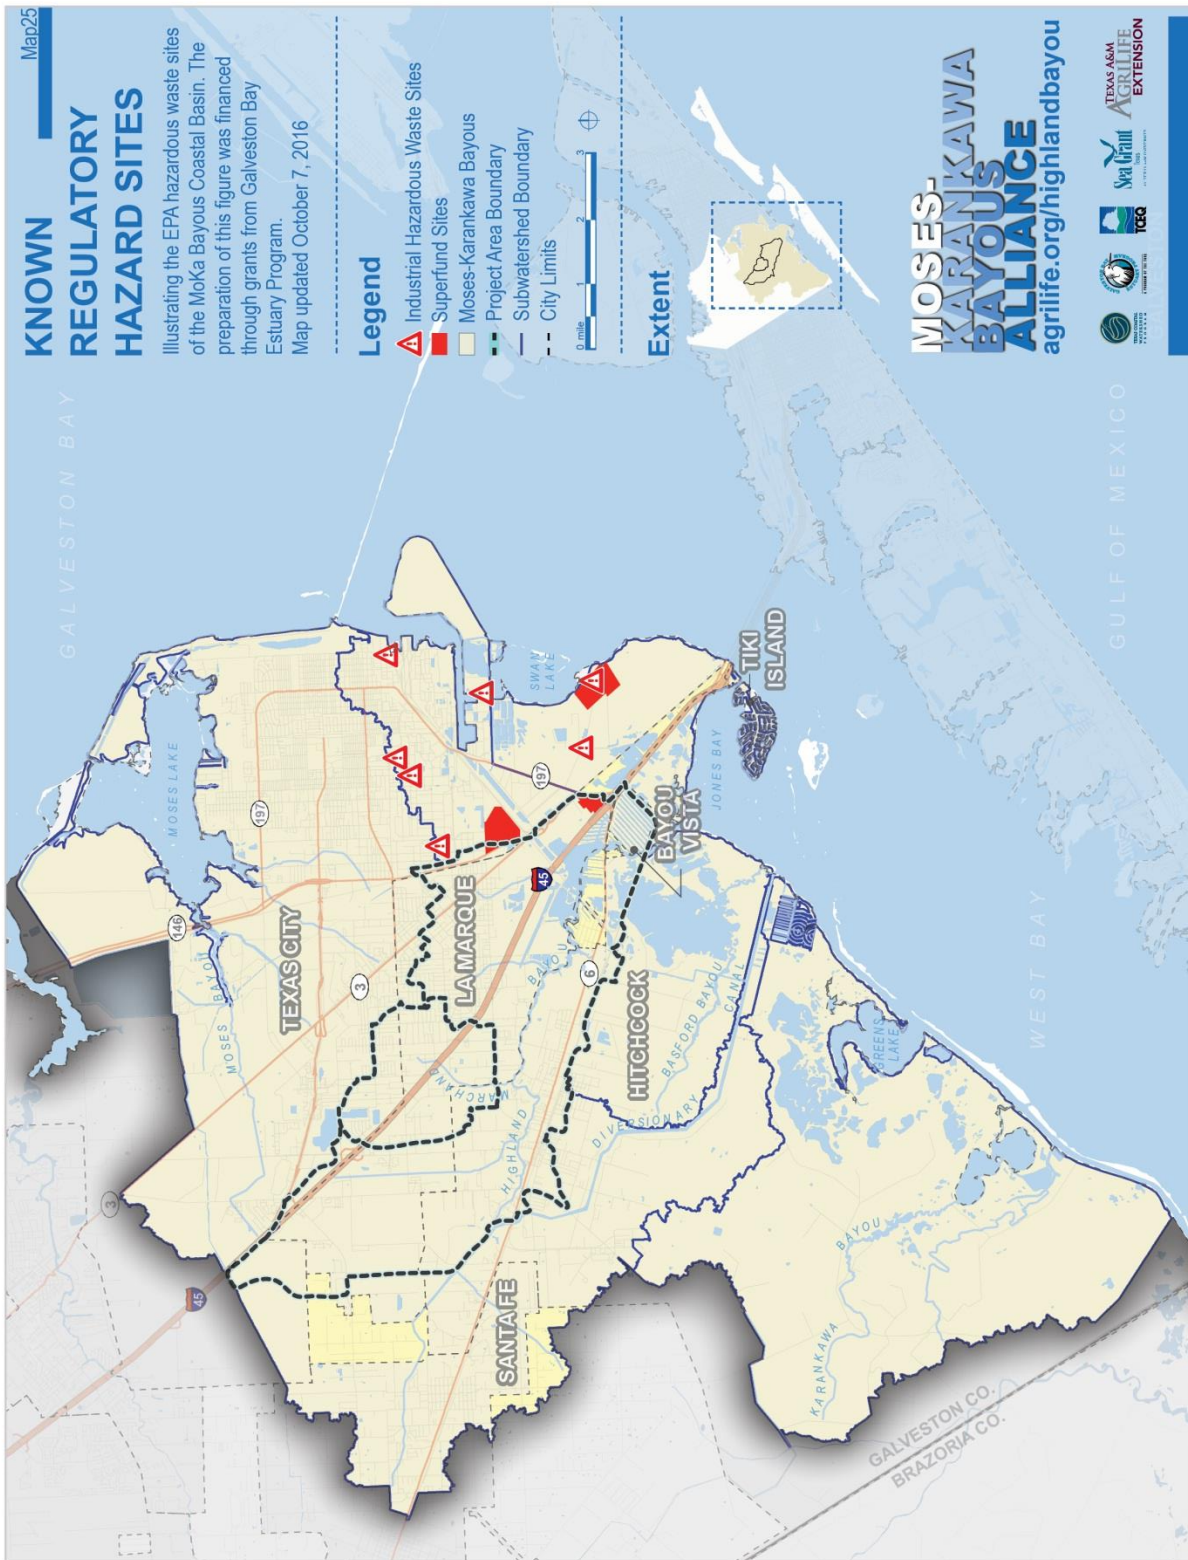

Appendix 2 – Land Use/Land Cover Analyses (1996-2010)

Measuring Land Cover

NOAA's Coastal Change Analysis Program (C-CAP) is a remote sensing program designed to measure the type and extent of land coverage. The program provides standardized data for coastal communities to measure changes to land coverages and usages over time. High resolution data is provided for certain targeted coastal areas, including around Galveston Bay. C-CAP categorizes land cover data into over 20 categories (See Appendix 2, Table 4 for definitions), and which were used for the analyses in this report. Maps 26-29, in this appendix depicts data used from years 1996, 2001, 2006, 2010, respectively.

Changes in land coverage by type as measured over a fifteen year period are summarized in Tables 2 and 3 in this section. Analyses indicate that some minor acreage was converted to land development in both watersheds. There is a similar decline in most other land use categories, such as agricultural lands and vegetated undeveloped lands. As a percentage of the total land over the 15 year period, about 2-3% of the land was converted to developed uses.


Using C-CAP data, estimates for impervious surface (IS) cover can be made for each subbasin. Ratios of impervious surface cover are defined for each C-CAP land use classification. These values range from under 20% impervious surface cover for 'open space development,' to over 80% for 'high intensity development.' Values for impervious surface cover by land cover/use are in Table 4, definitions.

Highland Bayou and Marchand Bayou are 44% and 68% developed, respectively. Based on the IS cover ratios for each development intensity, impervious surface covers an estimated 16% of Highland Bayou and 21% of Marchand Bayou (Appendix 2, Table 1). Each basin experienced an increase in impervious surface cover, ranging from 2% to 11% increases in 2006 values over 1996 values. In Highland Bayou, this means an additional 85 acres of impervious cover and in Marchand Bayou another 14 acres of impervious cover.


Appendix 2, Table 1. Estimate Impervious Surface (IS) Cover for the Subbasins using NOAA C-CAP Data.

	Highland Bayou	Marchand Bayou
Percent Developed Acres	44%	68%
Percent Impervious Surface Cover	16%	21%


Stream habitat quality declines rapidly as impervious surface increases in the surrounding watershed. Figure 1 shows that above 25% imperviousness, stream quality indicators rapidly become non-supporting. Even with as low as 10% imperviousness, stream quality is significantly impacted. This model suggests we will get a better bang for our buck if we preserve those sensitive watersheds that have less than 25% imperviousness, and especially those that have less than 10% imperviousness.

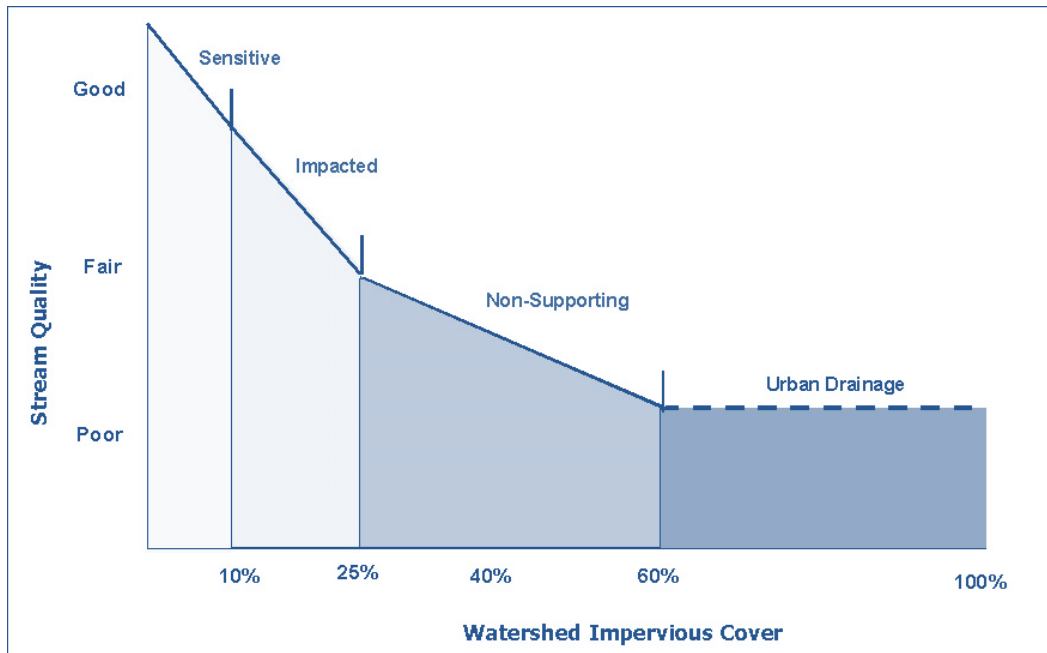


Appendix 2, Figure 1. Stream quality impacts by percent impervious cover in a watershed. Watershed Impervious Cover Model. Source: Stormwater Management Resource Center.

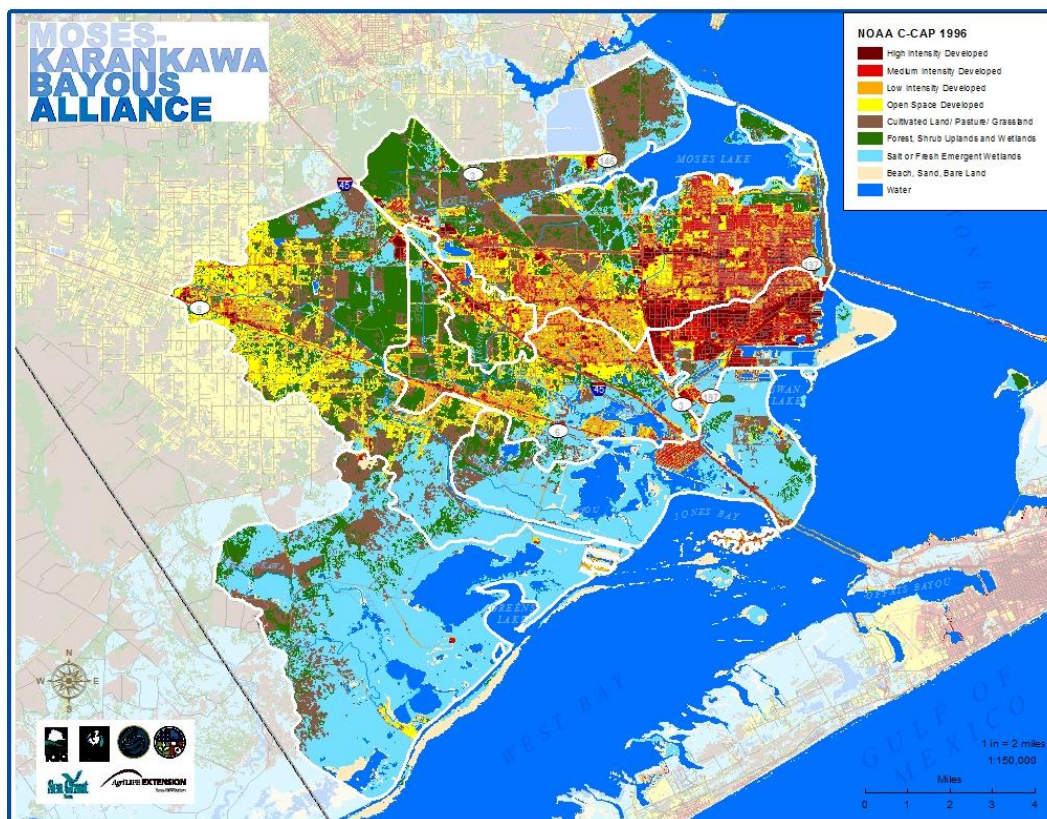


Map- 26. NOAA Coastal Change Analysis Program (C-CAP) for the entire Highland Bayou Coastal Basin Study Area, 1996.

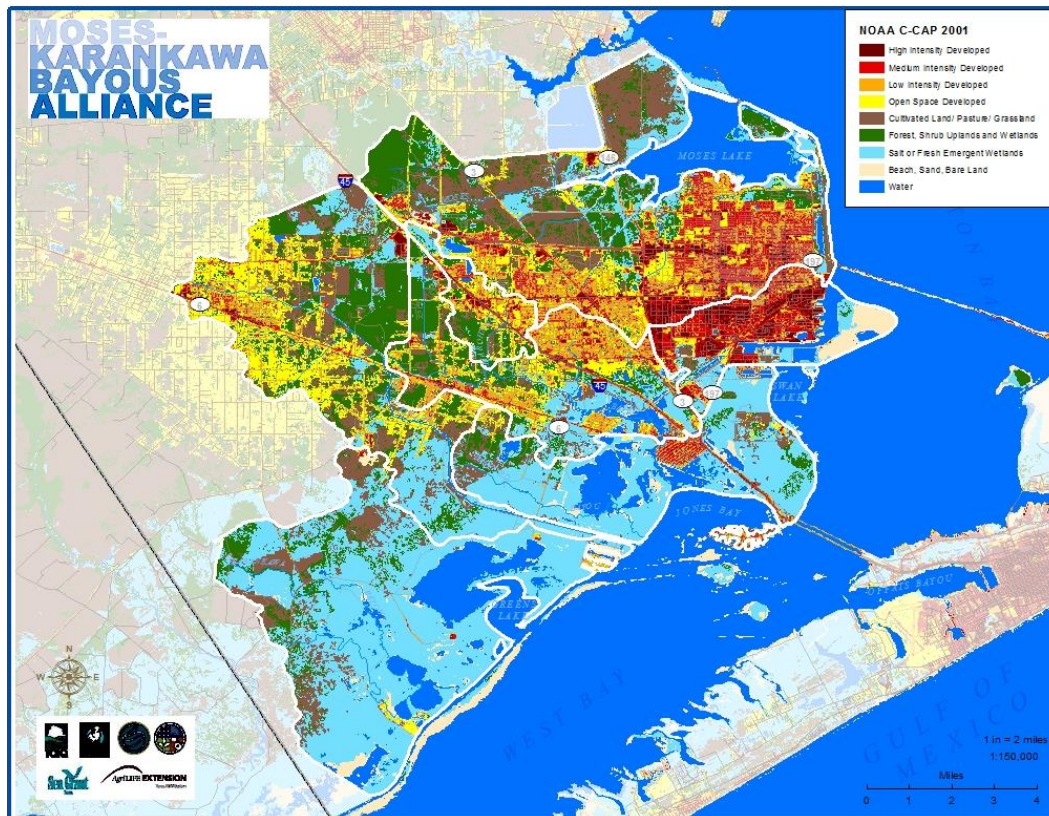

Map- 27. NOAA C-CAP for the entire Highland Bayou Coastal Basin Study Area, 2001.

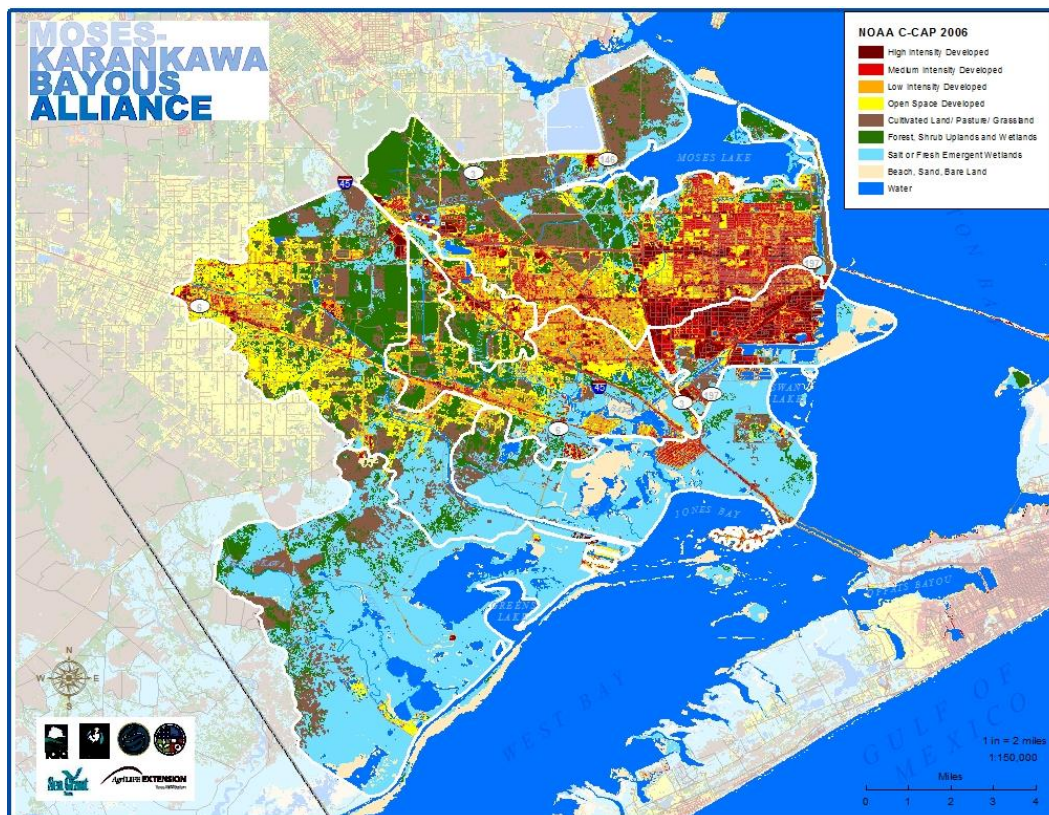

Map- 28. NOAA C-CAP for the entire Highland Bayou Coastal Basin Study Area, 2006.

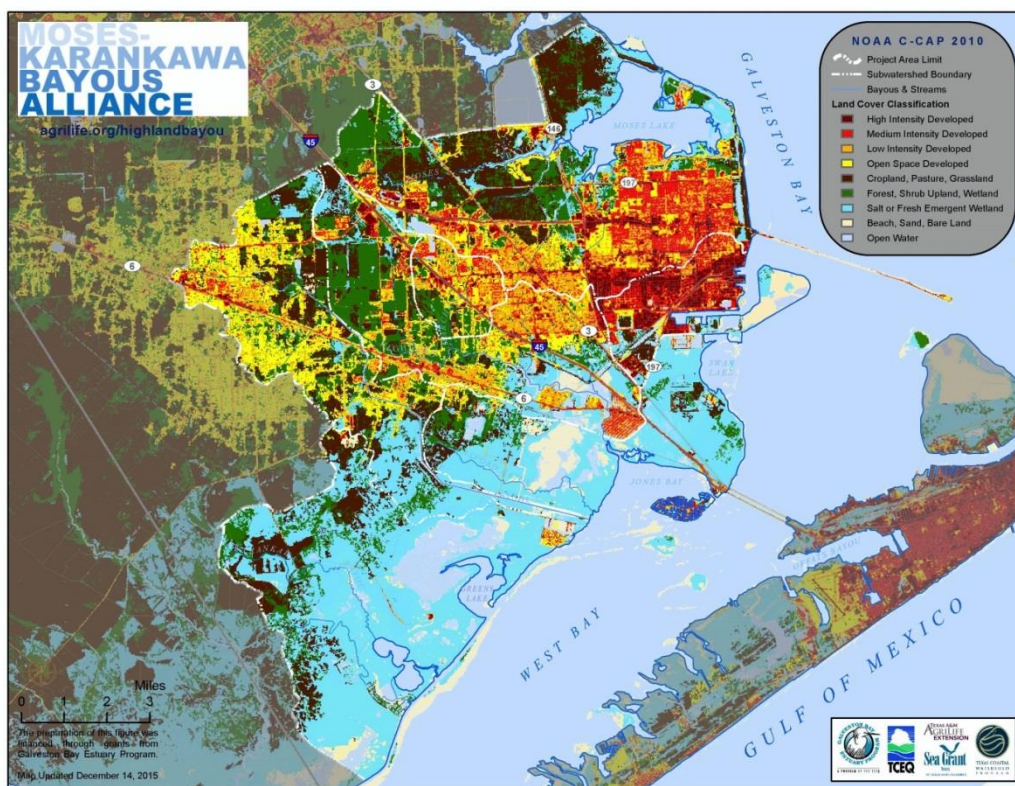

Map- 29. NOAA C-CAP for the entire Highland Bayou Coastal Basin Study Area, 2010.

Appendix 2, Table 2. Summary of NOAA C-CAP for Highland Bayou Subbasin, Years 1996-2010.

Highland Bayou	1996		2001		2006		2010	15 yr. net change
	Acres	% change	Acres	% change	Acres	% change	Acres	
Developed, High Intensity	357	1.3%	361	12.1%	405	2.1%	413	15.9%
Developed, Medium Intensity	1058	1.5%	1074	5.1%	1128	4.2%	1175	11.1%
Developed, Low Intensity	1982	1.0%	2001	2.5%	2052	2.3%	2099	5.9%
Developed, Open Space	1532	0.3%	1538	3.2%	1587	2.2%	1623	5.9%
Total Developed Lands	4929	0.9%	4974	4.0%	5172	2.7%	5310	7.7%
Cultivated Crops	6	0.0%	6	3.4%	7	0.0%	7	3.4%
Pasture/ Hay	731	-0.9%	725	-5.4%	686	-1.2%	677	-7.3%
Grassland/ Herbaceous	638	1.3%	646	4.6%	676	-3.5%	652	2.3%
Total Agricultural Lands	1375	0.1%	1377	-0.6%	1368	-2.3%	1336	-2.8%
Deciduous Forest	608	-1.2%	600	-6.3%	563	-4.1%	540	-11.2%
Evergreen Forest	582	-5.8%	548	-0.9%	543	-3.1%	526	-9.6%
Mixed Forest	215	-2.9%	209	-8.4%	191	-8.7%	175	-18.8%
Scrub/ Shrub	550	1.4%	558	-11.3%	495	-5.5%	467	-15.0%
Total Vegetated Undeveloped Lands	1955	-2.0%	1915	-6.4%	1792	-4.7%	1708	-12.6%
Palustrine Forested Wetland	937	0.1%	938	-2.6%	914	-1.3%	902	-3.7%
Palustrine Scrub/ Scrub Wetland	355	-0.5%	354	-4.5%	338	-3.2%	327	-8.1%
Palustrine Emergent Wetland	991	0.8%	999	-2.5%	974	0.3%	977	-1.4%
Estuarine Forested Wetland	0	0.0%	0	0.0%	0	0.0%	0	0.0%
Estuarine Scrub/ Shrub Wetland	0	0.0%	0	0.0%	0	0.0%	0	0.0%
Estuarine Emergent Wetland	699	1.2%	708	-1.8%	695	-1.1%	688	-1.6%
Total Palustrine Wetlands	2283	0.3%	2290	-2.8%	2226	-0.9%	2206	-3.4%
Total Estuarine Wetlands	699	1.2%	708	-1.8%	695	-1.1%	688	-1.6%
Unconsolidated Shore	216	0.0%	216	50.4%	325	-0.3%	324	50.0%
Barren Land	30	-77.8%	7	-20.0%	5	0.0%	5	-82.2%
Total Beach/ Bare Lands	246	-9.5%	223	48.3%	331	-0.3%	330	33.9%
Open Water	599	0.1%	600	-16.2%	503	1.2%	509	-15.0%
Palustrine Aquatic Bed	6	0.0%	6	3.4%	7	0.0%	7	3.4%
Estuarine Aquatic Bed	0	0.0%	0	0.0%	0	0.0%	0	0.0%
Total Open Water	606	0.1%	606	-16.0%	510	1.2%	516	-14.8%
Sum Check	12,093		12,093		12,093		12,093	

Appendix 2, Table 3. Summary of NOAA C-CAP for Marchand Bayou Subbasin, Years 1996-2010.

Marchand Bayou	1996		2001		2006		2010	15 yr. net change
	Acres	% change	Acres	% change	Acres	% change	Acres	
Developed, High Intensity	113	1.3%	115	15.3%	132	0.7%	133	17.6%
Developed, Medium Intensity	337	0.1%	338	12.2%	379	0.3%	380	12.6%
Developed, Low Intensity	595	0.0%	596	4.6%	623	0.2%	625	4.9%
Developed, Open Space	503	0.0%	503	2.9%	517	0.5%	520	3.4%
Total Developed Lands	1549	0.1%	1551	6.5%	1652	0.4%	1658	7.0%
Cultivated Crops	0	0.0%	0	0.0%	0	0.0%	0	0.0%
Pasture/ Hay	183	0.0%	183	-28.0%	131	-1.2%	130	-28.9%
Grassland/ Herbaceous	89	0.0%	89	-18.4%	73	3.7%	75	-15.4%
Total Agricultural Lands	272	0.0%	272	-24.8%	204	0.5%	205	-24.4%
Deciduous Forest	152	0.0%	152	-2.0%	149	0.0%	149	-2.0%
Evergreen Forest	121	0.0%	121	-3.4%	117	6.1%	124	2.5%
Mixed Forest	27	0.0%	27	-3.3%	26	0.0%	26	-3.3%
Scrub/ Shrub	104	0.0%	104	-21.0%	82	-14.9%	70	-32.7%
Total Vegetated Undeveloped Lands	404	0.0%	404	-7.4%	375	-1.4%	369	-8.6%
Palustrine Forested Wetland	126	0.0%	126	-1.6%	124	11.0%	138	9.2%
Palustrine Scrub/ Scrub Wetland	47	0.0%	47	-0.9%	47	-33.1%	31	-33.8%
Palustrine Emergent Wetland	16	0.0%	16	-6.8%	15	0.0%	15	-6.8%
Estuarine Forested Wetland	0	0.0%	0	0.0%	0	0.0%	0	0.0%
Estuarine Scrub/ Shrub Wetland	0	0.0%	0	0.0%	0	0.0%	0	0.0%
Estuarine Emergent Wetland	0	0.0%	0	0.0%	0	0.0%	0	0.0%
Total Palustrine Wetlands	190	0.0%	190	-1.9%	186	-1.1%	184	-2.9%
Total Estuarine Wetlands	0	0.0%	0	0.0%	0	0.0%	0	0.0%
Unconsolidated Shore	6	0.0%	6	0.0%	6	0.0%	6	0.0%
Barren Land	2	-100.0%	0	0.0%	0	0.0%	0	-90.0%
Total Beach/ Bare Lands	8	-27.1%	6	3.7%	6	0.0%	6	-24.4%
Open Water	30	0.0%	30	0.0%	30	0.0%	30	0.0%
Palustrine Aquatic Bed	2	0.0%	2	0.0%	2	0.0%	2	0.0%
Estuarine Aquatic Bed	0	0.0%	0	0.0%	0	0.0%	0	0.0%
Total Open Water	32	0.0%	32	0.0%	32	0.0%	32	0.0%
Sum Check	2,455		2,455		2,455		2,455	

Appendix 2, Table 4. Legend for Land Cover Types for Coastal Change Analysis Program.

High Intensity Developed	areas where people reside or work in relatively high numbers. Examples include apartment complexes, row houses and commercial and industrial uses. Impervious Surfaces account for 80-100% of total cover.
Medium Intensity Developed	areas with a mixture of constructed materials and vegetation. Impervious surfaces account for 50-79% of the total cover. These area most commonly include single-family housing units
Low Intensity Developed	areas with a mixture of constructed materials and vegetation. Impervious surfaces account for 20-49% of the total cover. These areas most commonly include single- family housing units
Open Space Developed	areas with a mixture of some constructed materials, but mostly vegetation in the form of lawn grasses. Impervious surfaces account for less than 20% of total cover. These areas most commonly include large-lot single family housing units, parks, golf courses, and vegetation planting in developed settings for recreation, erosion control, or aesthetic purposes.
Cultivated Land	areas used for the production of annual crops, such as corn, soybeans, vegetables, tobacco, and cotton, and also perennial woody crops such as orchards and vineyards. Crop vegetation accounts for greater than 20% of total vegetation. This class also includes all land being actively tilled.
Pasture/ Hay	areas of grasses, legumes, or grass-legume mixtures planted for livestock grazing or the production of seed or hay crops, typically on a perennial cycle. Pasture/hay vegetation accounts for greater than 20% of total vegetation
Grassland	areas dominated by grammoid or herbaceous vegetation, generally greater than 80% of total vegetation. These areas are not subject to intensive management such as tilling, but can be utilized for grazing
Deciduous Forest	areas dominated by trees generally greater than 5 meters tall, and greater than 20% of total vegetation cover. More than 75% of the tree species shed foliage simultaneously in response to seasonal change.
Evergreen Forest	areas dominated by trees generally greater than 5 meters tall, and greater than 20% of total vegetation cover. More than 75% of the tree special maintain their leaves all year. Canopy is never without green foliage.
Mixed Forest	areas dominated by trees generally greater than 5 meters tall, and greater than 20% of total vegetation cover. Neither deciduous nor evergreen species are greater than 75% of total tree cover.
Scrub/Shrub	areas dominated by shrubs; less than 5 meters tall with shrub canopy typically greater than 20% of total vegetation. This class includes true shrubs, young trees in an early successional stage or trees stunted from environmental conditions
Forested Wetland	areas where forest or shrubland vegetation accounts for greater than 20% of vegetative cover and the soil or substrate is periodically saturated with or covered with water
Scrub/Shrub Wetland	areas where forest or shrubland vegetation accounts for greater than 20% of vegetative cover and the soil or substrate is periodically saturated with or covered with water
Emergent Wetland	areas where perennial herbaceous vegetation accounts for greater than 80% of vegetative cover and the soil or substrate is periodically saturated with or covered with water
Beach; Bare Land	areas of sand, gravel pits, and other accumulations of earthen material. Generally, vegetation account for less than 15% of total cover.
Water; Aquatic Beds	areas of open water, generally with less than 25% cover of vegetation or soil.

Appendix 3 – NPS Loading Table

Appendix 3, Table 1. NPS Loading in 2424A_01 by Land Use

Pollutant of Concern

Nitrogen

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	1.90	1.80	1.60	1.80	2.00	2.25	2.20	1.65	-	
r (inches)	21	16	26	16	21	19	9	7	-	
a (ac.)	267	321	107	1,495	260	4	1,271	42	490	4,258 ac.
L (lbs)	2,460	2,121	1,013	9,892	2,436	41	182	3,506	-	21,650 lbs.

Phosphorous

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	0.23	0.20	0.27	0.26	0.31	0.36	0.42	0.23	-	
r (inches)	21	16	26	16	21	19	9	7	-	
a (ac.)	267	321	107	1,495	260	4	1,271	42	490	4,258 ac.
L (lbs)	298	236	171	1,429	378	7	35	489	-	3,041 lbs.

TSS

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	135.00	60.00	135.00	135.00	190.00	190.00	130.00	65.00	-	
r (inches)	21	16	26	16	21	19	9	7	-	
a (ac.)	267	321	107	1,495	260	4	1,271	42	490	4,258 ac.
L (lbs)	174,808	70,696	85,512	741,875	231,377	3,434	10,749	138,107	-	1,456,559 lbs.

BOD

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	7.50	7.70	8.20	6.20	8.70	10.80	3.90	4.80	-	
r (inches)	21	16	26	16	21	19	9	7	-	
a (ac.)	267	321	107	1,495	260	4	1,271	42	490	4,258 ac.
L (lbs)	9,712	9,073	5,194	34,071	10,595	195	322	10,199	-	79,361 lbs.

Enterrococci

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	
c (CFUs/100mL)	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	437.75	280.16	-	
r (inches)	21	16	26	16	21	19	9	7	-	
a (ac.)	267	321	107	1,495	260	4	1,271	42	490	4,258 ac.
L (CFUs in billions)	22,739	20,691	11,123	96,501	21,385	317	165	2,714	-	175,635 CFUs

Appendix 3, Table 2. NPS Loading in 2424A_02 by Land Use

Pollutant of Concern

Nitrogen

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	1.90	1.80	1.60	1.80	2.00	2.25	2.20	1.65	-	
r (inches)	15	15	-	15	-	-	8	6	-	
a (ac.)	9	3	-	60	-	-	468	41	134	ac.
L (Lbs)	57	16	-	380	-	-	155	1,126	-	1,734 lbs.

Phosphorous

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	0.23	0.20	0.27	0.26	0.31	0.36	0.42	0.23	-	
r (inches)	15	15	-	15	-	-	8	6	-	
a (ac.)	9	3	-	60	-	-	468	41	134	ac.
L (Lbs)	7	2	-	55	-	-	30	157	-	250 lbs.

TSS

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	135.00	60.00	135.00	135.00	190.00	190.00	130.00	65.00	-	
r (inches)	15	15	-	15	-	-	8	6	-	
a (ac.)	9	3	-	60	-	-	468	41	134	ac.
L (Lbs)	4,071	517	-	28,465	-	-	9,186	44,366	-	86,605 lbs.

BOD

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	7.50	7.70	8.20	6.20	8.70	10.80	3.90	4.80	-	
r (inches)	15	15	-	15	-	-	8	6	-	
a (ac.)	9	3	-	60	-	-	468	41	134	ac.
L (Lbs)	226	66	-	1,307	-	-	276	3,276	-	5,152 lbs.

Enterrococci

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	
c (CFUs/100mL)	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	437.75	280.16	-	
r (inches)	15	15	-	15	-	-	8	6	-	
a (ac.)	9	3	-	60	-	-	468	41	134	ac.
L (CFUs in billions)	530	151	-	3,703	-	-	141	872	-	5,396 CFUs

Appendix 3, Table 3. NPS Loading in 2424A_03 by Land Use

Pollutant of Concern

Nitrogen

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	1.90	1.80	1.60	1.80	2.00	2.25	2.20	1.65	-	
r (inches)	16	18	-	12	16	21	6	7	6	
a (ac.)	67	30	-	675	40	10	634	140	3	ac.
L (Lbs)	475	225	-	3,383	294	105	416	1,659	-	6,557 lbs.

Phosphorous

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	0.23	0.20	0.27	0.26	0.31	0.36	0.42	0.23	-	
r (inches)	16	18	-	12	16	21	6	7	6	
a (ac.)	67	30	-	675	40	10	634	140	3	ac.
L (Lbs)	58	25	-	489	45	17	79	231	-	944 lbs.

TSS

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	135.00	60.00	135.00	135.00	190.00	190.00	130.00	65.00	-	
r (inches)	16	18	-	12	16	21	6	7	6	
a (ac.)	67	30	-	675	40	10	634	140	3	ac.
L (Lbs)	33,784	7,487	-	253,693	27,883	8,890	24,568	65,369	-	421,674 lbs.

BOD

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	7.50	7.70	8.20	6.20	8.70	10.80	3.90	4.80	-	
r (inches)	16	18	-	12	16	21	6	7	6	
a (ac.)	67	30	-	675	40	10	634	140	3	ac.
L (Lbs)	1,877	961	-	11,651	1,277	505	737	4,827	-	21,835 lbs.

Enterrococci

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	
c (CFUs/100mL)	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	437.75	280.16	-	
r (inches)	16	18	-	12	16	21	6	7	6	
a (ac.)	67	30	-	675	40	10	634	140	3	ac.
L (CFUs in billions)	4,395	2,191	-	33,000	2,577	822	377	1,284	-	44,646 CFUs

Appendix 3, Table 4. NPS Loading in 2424A_04 by Land Use

Pollutant of Concern

Nitrogen

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	1.90	1.80	1.60	1.80	2.00	2.25	2.20	1.65	-	
r (inches)	19	17	20	13	15	-	7	7	5	
a (ac.)	145	264	3	425	18	-	979	334	5	ac.
L (Lbs)	1,204	1,824	18	2,182	117	-	1,134	2,433	-	8,912 lbs.

Phosphorous

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	0.23	0.20	0.27	0.26	0.31	0.36	0.42	0.23	-	
r (inches)	19	17	20	13	15	-	7	7	5	
a (ac.)	145	264	3	425	18	-	979	334	5	ac.
L (Lbs)	146	203	3	315	18	-	217	339	-	1,240 lbs.

TSS

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	135.00	60.00	135.00	135.00	190.00	190.00	130.00	65.00	-	
r (inches)	19	17	20	13	15	-	7	7	5	
a (ac.)	145	264	3	425	18	-	979	334	5	ac.
L (Lbs)	85,555	60,791	1,502	163,668	11,160	-	67,013	95,830	-	485,518 lbs.

BOD

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	7.50	7.70	8.20	6.20	8.70	10.80	3.90	4.80	-	
r (inches)	19	17	20	13	15	-	7	7	5	
a (ac.)	145	264	3	425	18	-	979	334	5	ac.
L (Lbs)	4,753	7,801	91	7,517	511	-	2,010	7,077	-	29,760 lbs.

Enterococci

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	
c (CFUs/100mL)	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	437.75	280.16	-	
r (inches)	19	17	20	13	15	-	7	7	5	
a (ac.)	145	264	3	425	18	-	979	334	5	ac.
L (CFUs in billions)	11,129	17,792	195	21,290	1,031	-	1,029	1,883	-	54,349 CFUs

Appendix 3, Table 5. NPS Loading in 2424A_05 by Land Use

Pollutant of Concern

Nitrogen

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	1.90	1.80	1.60	1.80	2.00	2.25	2.20	1.65	-	
r (inches)	18	25	-	13	14	-	5	6	-	
a (ac.)	67	171	-	300	7	-	1,942	466	-	ac.
L (Lbs)	524	1,716	-	1,571	48	-	1,193	4,550	-	9,602 lbs.

Phosphorous

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	0.23	0.20	0.27	0.26	0.31	0.36	0.42	0.23	-	
r (inches)	18	25	-	13	14	-	5	6	-	
a (ac.)	67	171	-	300	7	-	1,942	466	-	ac.
L (Lbs)	63	191	-	227	8	-	228	634	-	1,351 lbs.

TSS

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	135.00	60.00	135.00	135.00	190.00	190.00	130.00	65.00	-	
r (inches)	18	25	-	13	14	-	5	6	-	
a (ac.)	67	171	-	300	7	-	1,942	466	-	ac.
L (Lbs)	37,205	57,195	-	117,834	4,599	-	70,500	179,252	-	466,585 lbs.

BOD

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	7.50	7.70	8.20	6.20	8.70	10.80	3.90	4.80	-	
r (inches)	18	25	-	13	14	-	5	6	-	
a (ac.)	67	171	-	300	7	-	1,942	466	-	ac.
L (Lbs)	2,067	7,340	-	5,412	211	-	2,115	13,237	-	30,381 lbs.

Enterrococci

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	
c (CFUs/100mL)	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	437.75	280.16	-	
r (inches)	18	25	-	13	14	-	5	6	-	
a (ac.)	67	171	-	300	7	-	1,942	466	-	ac.
L (CFUs in billions)	4,839	16,739	-	15,328	425	-	1,082	3,522	-	41,936 CFUs

Appendix 3, Table 6. NPS Loading in 2424C by Land Use

Pollutant of Concern

Nitrogen

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	1.90	1.80	1.60	1.80	2.00	2.25	2.20	1.65	-	
r (inches)	19	19	-	15	17	21	8	7	-	
a (ac.)	112	345	-	941	138	5	849	48	17	ac.
L (Lbs)	928	2,629	-	5,588	1,083	49	190	2,282	-	12,749 lbs.

Phosphorous

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	0.23	0.20	0.27	0.26	0.31	0.36	0.42	0.23	-	
r (inches)	19	19	-	15	17	21	8	7	-	
a (ac.)	112	345	-	941	138	5	849	48	17	ac.
L (Lbs)	112	292	-	807	168	8	36	318	-	1,742 lbs.

TSS

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	135.00	60.00	135.00	135.00	190.00	190.00	130.00	65.00	-	
r (inches)	19	19	-	15	17	21	8	7	-	
a (ac.)	112	345	-	941	138	5	849	48	17	ac.
L (Lbs)	65,931	87,649	-	419,071	102,922	4,127	11,217	89,880	-	780,797 lbs.

BOD

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	7.50	7.70	8.20	6.20	8.70	10.80	3.90	4.80	-	
r (inches)	19	19	-	15	17	21	8	7	-	
a (ac.)	112	345	-	941	138	5	849	48	17	ac.
L (Lbs)	3,663	11,248	-	19,246	4,713	235	337	6,637	-	46,078 lbs.

Enterococci

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	
c (CFUs/100mL)	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	437.75	280.16	-	
r (inches)	19	19	-	15	17	21	8	7	-	
a (ac.)	112	345	-	941	138	5	849	48	17	ac.
L (CFUs in billions)	8,576	25,653	-	54,512	9,512	381	172	1,766	-	100,573 CFUs

Appendix 3, Table 7. Nitrogen Loading in Pounds by Assessment Unit**2424A_01**

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	1.90	1.80	1.60	1.80	2.00	2.25	2.20	1.65	-	
r (in.)	21	16	26	16	21	19	9	7	-	
a (ac.)	267	321	107	1,495	260	4	1,271	42	490	4,258 ac.
L (lb)	2,460	2,121	1,013	9,892	2,436	41	182	3,506	-	21,650 lbs

2424A_02

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	1.90	1.80	1.60	1.80	2.00	2.25	2.20	1.65	-	
r (in.)	15	15	-	15	-	-	8	6	-	
a (ac.)	9	3	-	60	-	-	468	41	134	715 ac.
L (lb)	57	16	-	380	-	-	155	1,126	-	1,734 lbs

2424A_03

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	1.90	1.80	1.60	1.80	2.00	2.25	2.20	1.65	-	
r (in.)	16	18	-	12	16	21	6	7	6	
a (ac.)	67	30	-	675	40	10	634	140	3	1,599 ac.
L (lb)	475	225	-	3,383	294	105	416	1,659	-	6,557 lbs

2424A_04

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	1.90	1.80	1.60	1.80	2.00	2.25	2.20	1.65	-	
r (in.)	19	17	20	13	15	-	7	7	5	
a (ac.)	145	264	3	425	18	-	979	334	5	2,172 ac.
L (lb)	1,204	1,824	18	2,182	117	-	1,134	2,433	-	8,912 lbs

2424A_05

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	1.90	1.80	1.60	1.80	2.00	2.25	2.20	1.65	-	
r (in.)	18	25	-	13	14	-	5	6	-	
a (ac.)	67	171	-	300	7	-	1,942	466	-	2,955 ac.
L (lb)	524	1,716	-	1,571	48	-	1,193	4,550	-	9,602 lbs

2424C

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (CFU/100mL)	1.90	1.80	1.60	1.80	2.00	2.25	2.20	1.65	-	
r (in.)	19	19	-	15	17	21	8	7	-	
a (ac.)	112	345	-	941	138	5	849	48	17	2,455 ac.
L (CFUs in Billions)	928	2,629	-	5,588	1,083	49	190	2,282	-	12,749 lbs

Total Load (lbs) in Basin = 61,204

Appendix 3, Table 8. Phosphorus Loading in Pounds by Assessment Unit**2424A_01**

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	0.23	0.20	0.27	0.26	0.31	0.36	0.42	0.23	-	
r (in.)	21	16	26	16	21	19	9	7	-	
a (ac.)	267	321	107	1,495	260	4	1,271	42	490	4,258 ac.
L (lb)	298	236	171	1,429	378	7	35	489	-	3,041 lbs

2424A_02

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	0.23	0.20	0.27	0.26	0.31	0.36	0.42	0.23	-	
r (in.)	15	15	-	15	-	-	8	6	-	
a (ac.)	9	3	-	60	-	-	468	41	134	715 ac.
L (lb)	7	2	-	55	-	-	30	157	-	250 lbs

2424A_03

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	0.23	0.20	0.27	0.26	0.31	0.36	0.42	0.23	-	
r (in.)	16	18	-	12	16	21	6	7	6	
a (ac.)	67	30	-	675	40	10	634	140	3	1,599 ac.
L (lb)	58	25	-	489	45	17	79	231	-	944 lbs

2424A_04

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	0.23	0.20	0.27	0.26	0.31	0.36	0.42	0.23	-	
r (in.)	19	17	20	13	15	-	7	7	5	
a (ac.)	145	264	3	425	18	-	979	334	5	2,172 ac.
L (lb)	146	203	3	315	18	-	217	339	-	1,240 lbs

2424A_05

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	0.23	0.20	0.27	0.26	0.31	0.36	0.42	0.23	-	
r (in.)	18	25	-	13	14	-	5	6	-	
a (ac.)	67	171	-	300	7	-	1,942	466	-	2,955 ac.
L (lb)	63	191	-	227	8	-	228	634	-	1,351 lbs

2424C

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (CFU/100mL)	0.23	0.20	0.27	0.26	0.31	0.36	0.42	0.23	-	
r (in.)	19	19	-	15	17	21	8	7	-	
a (ac.)	112	345	-	941	138	5	849	48	17	2,455 ac.
L (CFUs in Billions)	112	292	-	807	168	8	36	318	-	1,742 lbs

Total Load (lbs) in Basin = 8,568

Appendix 3, Table 9. TSS Loading in Pounds by Assessment Unit**2424A_01**

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	135.00	60.00	135.00	135.00	190.00	190.00	130.00	65.00	-	
r (in.)	21	16	26	16	21	19	9	7	-	
a (ac.)	267	321	107	1,495	260	4	1,271	42	490	4,258 ac.
L (lb)	174,808	70,696	85,512	741,875	231,377	3,434	10,749	138,107	-	1,456,559 lbs

2424A_02

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	135.00	60.00	135.00	135.00	190.00	190.00	130.00	65.00	-	
r (in.)	15	15	-	15	-	-	8	6	-	
a (ac.)	9	3	-	60	-	-	468	41	134	715 ac.
L (lb)	4,071	517	-	28,465	-	-	9,186	44,366	-	86,605 lbs

2424A_03

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	135.00	60.00	135.00	135.00	190.00	190.00	130.00	65.00	-	
r (in.)	16	18	-	12	16	21	6	7	6	
a (ac.)	67	30	-	675	40	10	634	140	3	1,599 ac.
L (lb)	33,784	7,487	-	253,693	27,883	8,890	24,568	65,369	-	421,674 lbs

2424A_04

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	135.00	60.00	135.00	135.00	190.00	190.00	130.00	65.00	-	
r (in.)	19	17	20	13	15	-	7	7	5	
a (ac.)	145	264	3	425	18	-	979	334	5	2,172 ac.
L (lb)	85,555	60,791	1,502	163,668	11,160	-	67,013	95,830	-	485,518 lbs

2424A_05

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	135.00	60.00	135.00	135.00	190.00	190.00	130.00	65.00	-	
r (in.)	18	25	-	13	14	-	5	6	-	
a (ac.)	67	171	-	300	7	-	1,942	466	-	2,955 ac.
L (lb)	37,205	57,195	-	117,834	4,599	-	70,500	179,252	-	466,585 lbs

2424C

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (CFU/100mL)	135.00	60.00	135.00	135.00	190.00	190.00	130.00	65.00	-	
r (in.)	19	19	-	15	17	21	8	7	-	
a (ac.)	112	345	-	941	138	5	849	48	17	2,455 ac.
L (CFUs in Billions)	65,931	87,649	-	419,071	102,922	4,127	11,217	89,880	-	780,797 lbs

Total Load (lbs) in Basin = 3,697,738

Appendix 3, Table 10. BOD Loading in Pounds by Assessment Unit**2424A_01**

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	7.50	7.70	8.20	6.20	8.70	10.80	3.90	4.80	-	
r (in.)	21	16	26	16	21	19	9	7	-	
a (ac.)	267	321	107	1,495	260	4	1,271	42	490	4,258 ac.
L (lb)	9,712	9,073	5,194	34,071	10,595	195	322	10,199	-	79,361 lbs

2424A_02

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	7.50	7.70	8.20	6.20	8.70	10.80	3.90	4.80	-	
r (in.)	15	15	-	15	-	-	8	6	-	
a (ac.)	9	3	-	60	-	-	468	41	134	715 ac.
L (lb)	226	66	-	1,307	-	-	276	3,276	-	5,152 lbs

2424A_03

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	7.50	7.70	8.20	6.20	8.70	10.80	3.90	4.80	-	
r (in.)	16	18	-	12	16	21	6	7	6	
a (ac.)	67	30	-	675	40	10	634	140	3	1,599 ac.
L (lb)	1,877	961	-	11,651	1,277	505	737	4,827	-	21,835 lbs

2424A_04

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	7.50	7.70	8.20	6.20	8.70	10.80	3.90	4.80	-	
r (in.)	19	17	20	13	15	-	7	7	5	
a (ac.)	145	264	3	425	18	-	979	334	5	2,172 ac.
L (lb)	4,753	7,801	91	7,517	511	-	2,010	7,077	-	29,760 lbs

2424A_05

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (mg/L)	7.50	7.70	8.20	6.20	8.70	10.80	3.90	4.80	-	
r (in.)	18	25	-	13	14	-	5	6	-	
a (ac.)	67	171	-	300	7	-	1,942	466	-	2,955 ac.
L (lb)	2,067	7,340	-	5,412	211	-	2,115	13,237	-	30,381 lbs

2424C

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	0.226	
c (CFU/100mL)	7.50	7.70	8.20	6.20	8.70	10.80	3.90	4.80	-	
r (in.)	19	19	-	15	17	21	8	7	-	
a (ac.)	112	345	-	941	138	5	849	48	17	2,455 ac.
L (CFUs in Billions)	3,663	11,248	-	19,246	4,713	235	337	6,637	-	46,078 lbs

Total Load (lbs) in Basin = 212,568

Appendix 3, Table 11. Entero Loading in CFUs (billions) by Assessment Unit**2424A_01**

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	
c (mg/L)	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	437.75	280.16	-	
r (in.)	21	16	26	16	21	19	9	7	-	
a (ac.)	267	321	107	1,495	260	4	1,271	42	490	4,258 ac.
L (CFUs in Billions)	22,739	20,691	11,123	96,501	21,385	317	165	2,714	-	175,635 CFUs

2424A_02

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	
c (mg/L)	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	437.75	280.16	-	
r (in.)	15	15	-	15	-	-	8	6	-	
a (ac.)	9	3	-	60	-	-	468	41	134	715 ac.
L (CFUs in Billions)	530	151	-	3,703	-	-	141	872	-	5,396 CFUs

2424A_03

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	
c (mg/L)	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	437.75	280.16	-	
r (in.)	16	18	-	12	16	21	6	7	6	
a (ac.)	67	30	-	675	40	10	634	140	3	1,599 ac.
L (CFUs in Billions)	4,395	2,191	-	33,000	2,577	822	377	1,284	-	44,646 CFUs

2424A_04

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	
c (mg/L)	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	437.75	280.16	-	
r (in.)	19	17	20	13	15	-	7	7	5	
a (ac.)	145	264	3	425	18	-	979	334	5	2,172 ac.
L (CFUs in Billions)	11,129	17,792	195	21,290	1,031	-	1,029	1,883	-	54,349 CFUs

2424A_05

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	
c (mg/L)	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	437.75	280.16	-	
r (in.)	18	25	-	13	14	-	5	6	-	
a (ac.)	67	171	-	300	7	-	1,942	466	-	2,955 ac.
L (CFUs in Billions)	4,839	16,739	-	15,328	425	-	1,082	3,522	-	41,936 CFUs

2424C

<i>Primary Use or Cover</i>	<i>Road</i>	<i>Commercial</i>	<i>Industrial</i>	<i>0-4 DUA</i>	<i>4-8 DUA</i>	<i>8-16 DUA</i>	<i>Agriculture</i>	<i>Non-Ag/Undev</i>	<i>Water</i>	<i>Total</i>
unit conversion	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	0.00103	
c (CFU/100mL)	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	3,852.20	437.75	280.16	-	
r (in.)	19	19	-	15	17	21	8	7	-	
a (ac.)	112	345	-	941	138	5	849	48	17	2,455 ac.
L (CFUs in Billions)	8,576	25,653	-	54,512	9,512	381	172	1,766	-	100,573 CFUs

Total Load (CFUs in billions) in Basin = 422,534

Appendix 4 – Stormwater BMP Factsheets




FORESTED RIPARIAN BUFFER

Stormwater Best Management Practices

8

What is a forested riparian buffer?

A forested riparian buffer is a stretch of land that intercepts surface runoff and groundwater before reaching a body of water such as a stream, lake or wetland. It can help reduce pollution in the water body, provide stormwater management and can act as a floodway during major storm events. Buffer widths vary by slope and existing conditions.

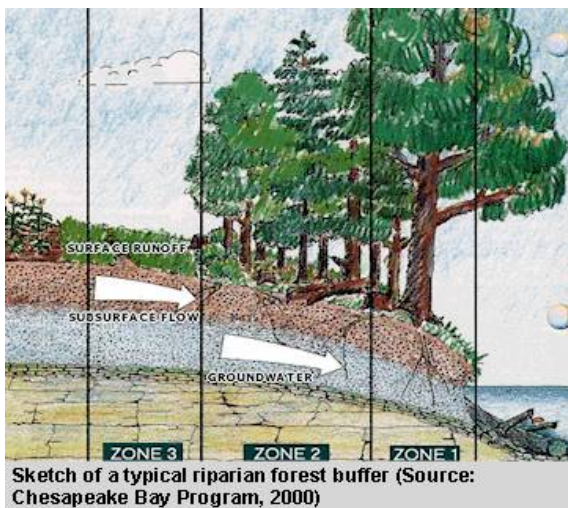

Sketch of a typical riparian forest buffer (Source: Chesapeake Bay Program, 2000)

Are there other names for this type of system?

Yes, there are three types of buffers that make up this system. A forested riparian buffer may also be called a Water Pollution Hazard Setback, Vegetated Buffer or Engineered Buffer.

How is a forested riparian buffer designed?

Zone 1 is a minimum of 25 feet wide plus wetland and critical habitats. The typical vegetation in this zone is an established forest. **Zone 2** is typically 50 – 100 feet wide and the vegetation should be a managed forest. **Zone 3** is a minimum of 25 feet wide. The vegetation in this zone should be either a managed forest or turf-grass. With good design and conditions, buffer widths can be as narrow as soft. The slope of the buffer should be between 1% and 15%. One study performed by the California Stormwater Quality Association determined that the maximum width of the tributary area should be 60 ft. and the length should be equal to the buffer. This design standard is able to handle a 2 year-storm without altering its performance. Maintenance of vegetation s and banks may be necessary.

Are there any secondary uses for a forested riparian buffer?

Yes, but there are some restrictions on what you can put in each of the zones. **Zone 1** is only allowed to be used for flood control, utility right-of-ways or footpaths. **Zone 2** can be used for some recreational activities, some stormwater BMPs and bike paths. There are no restrictions for **Zone 3**.



BEST MANAGEMENT PRACTICES 8

6/8/2012

How much does it cost to install and maintain a forested riparian buffer?

The actual amount to construct and maintain a riparian buffer is highly dependent on the length and width of the buffer and existing conditions. One study conducted in 2006 by the Chesapeake Bay Program determined that it would cost approximately \$3,000.00 - \$7,500.00 per acre to plant and maintain a forested riparian buffer.

Are there any special considerations?

A forested riparian buffer is effective at removing pollutants when the incoming stormwater runoff is evenly distributed along the buffer. If a channel were to be created in the buffer, large quantities of water would flow through the channel and not get filtered by the buffer. Special care should be taken so that channels do not form in the buffer and that the water is evenly dispersed throughout the buffer.

Who should use a forested riparian buffer?


The larger size required for a forested riparian buffer limits the possible land applications.

Typically, they are applied near new developments with the buffer as an established preservation area. They are then maintained through easements or a community association. Buffers can also be installed in existing developed areas but may require an easement from landowners.

How effective is a forested riparian buffer at removing pollutants?

The data shown in the graph was obtained from 8 separate studies. A forested riparian buffer is able to remove approximately 45% of the nitrogen, 39% of the phosphorus, 40% of the BOD and 66% of the TSS from stormwater runoff.

Percent Removal of Pollutants

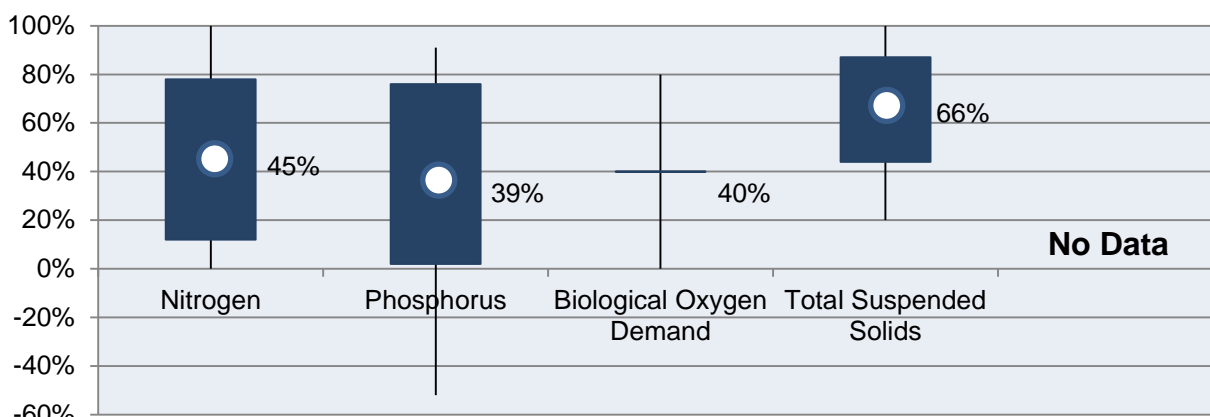

The top of the line represents the maximum value found and the bottom of the line represents the minimum value found. The white point signifies the average of all the found values, also shown numerically next to the white point. The solid colored box represents one standard deviation plus or minus the average. This means 68% of the found values lie within the range of the solid colored box.



Content in this fact sheet was extracted from U.S. EPA National Menu of Best Management Practices

Texas NEMO is an educational program of Texas A&M University, Texas Sea Grant and the Texas AgriLife Extension service, and is an official partner of the National NEMO Network. In addition to support from TAMU, NEMO is funded by grants from the EPA, TCEQ and GBEP.



GRASSED SWALE

Stormwater Best Management Practices

9

What is a grassed swale?

A grassed swale is a stretch of land with a depression that is designed to remove pollutants from stormwater runoff. It is able to do this by slowing down the water before draining offsite. A grassed swale can be thought of as a broad, shallow vegetated drainage ditch. The main difference between a swale and a filter strip is that swales receive concentrated flows and filter strips receive evenly distributed flows.



Grassed swales can be used along roadsides and parking lots to collect and treat stormwater runoff

Source: EPA, 2001

Are there any secondary uses for a grassed swale?

Grassed swales are typically also used to transport stormwater runoff. A well designed grass swale should be able to handle a 2-year storm with little to no erosion. This same grassed swale should also be capable of handling a 10-year storm safely.

How is a grassed swale designed?

It is recommended that grassed swales be built on land with a 1-2 percent slope. However, it is acceptable to build a grassed swale on land with up to a 4 percent slope. Grassed swales typically have a trapezoidal or semi-circular cross-sectional area and the rate of pollutant removal is directly proportional to the cross-sectional area. The swale should be 2-8 ft. wide at the bottom and the length should be long enough to hold the water for 10 minutes. The length of the swale is calculated by multiplying the velocity (ft. / s.) by 600 s., the residence time of the water. Swales can be used to treat up to 5 acres of on-site drainage. The soil in the grassed swale area should also be permeable to allow for infiltration. Any water pooled after a storm event should be completely gone within 48 hours. Grassed swales work best in series with other best management practices to achieve the highest rate of pollution removal. For example, a grassed swale could drain into a dry detention basin for further treatment.

Are there other types of swales?

Yes, there are four variations on this type of system which include dry swale, wet swale, biofilter, and bioswale. A grassed swale can also be referred to as an open channel, infiltration swale, or vegetated swale.



BEST MANAGEMENT PRACTICES 9

6/8/2012

How much does it cost to install and maintain a grassed swale?

A grassed swale requires regular maintenance like any grassy area or lawn. Litter that accumulates through the stormwater runoff must be frequently collected to maintain its effectiveness. One evaluation performed by the EPA in 2001 suggests that it would cost \$0.50 per square ft. to install a grassed swale.

Are there any special considerations?

Grassed swales also act as a drainage ditch for many different types of projects. If a drainage ditch is already planned it is more appropriate to look at the cost of a grassed swale versus a concrete drainage ditch. Generally, it is much cheaper to construct a grassed swale than it is to construct a concrete drainage ditch.


Who should use a grassed swale?

Grassed swales are ideal for residential areas and near roads and highways. They are well suited for these locations because they are a more environmentally friendly solution to the typical concrete drainage ditch. The linearity of the swale mirrors the road and swales are less hazardous than the steep and deep concrete drainage ditches.

How effective is a grassed swale at removing pollutants?

The data shown in the following table and graph were obtained from 42 separate studies. A grassed swale is able to remove approximately 38% of the nitrogen, 33% of the phosphorus, 49% of the BOD, 70% of the TSS, and -43% of the bacteria from stormwater runoff.

Percent Removal of Pollutants

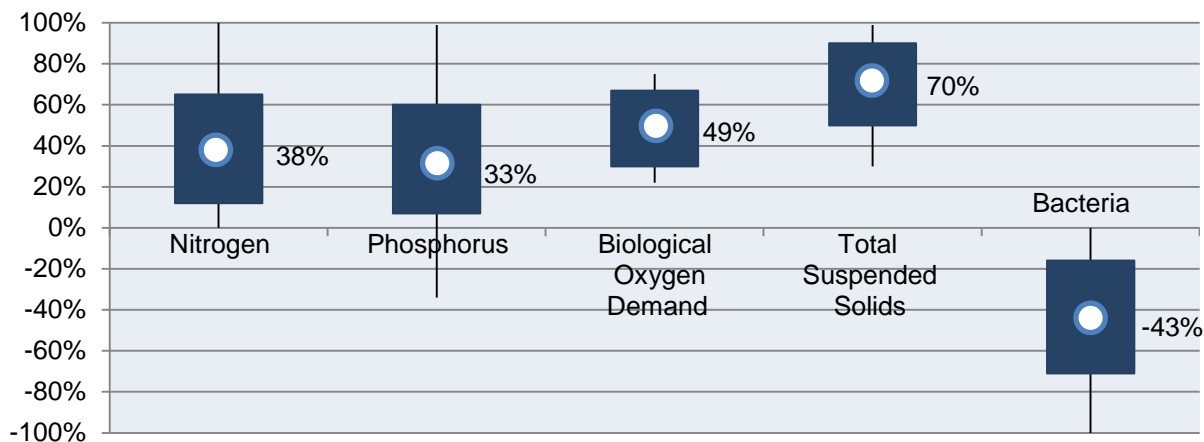

The top of the line represents the maximum value found and the bottom of the line represents the minimum value found. The white point signifies the average of all the found values, also shown numerically next to the white point. The solid colored box represents one standard deviation plus or minus the average. This means 68% of the found values lie within the range of the solid colored box.

Content in this fact sheet was extracted from U.S. EPA National Menu of Best Management Practices



Texas NEMO is an educational program of Texas A&M University, Texas Sea Grant and the Texas AgriLife Extension service, and is an official partner of the National NEMO Network. In addition to support from TAMU, NEMO is funded by grants from the EPA, TCEQ and GBEP.



INFILTRATION BASIN

Stormwater Best Management Practices

10

What is an infiltration basin?

An infiltration basin is a shallow reservoir that is intended to let stormwater permeate into the ground. By letting the stormwater soak into the soil, this system is able to filter out many of the large and small particles and dissolved pollutants. The biggest difference between an infiltration basin and a dry detention basin is that all water that enters an infiltration basin should permeate the ground.



Infiltration basins are designed to collect stormwater from impervious areas and provide pollutant removal benefits through detention and filtration

Source: EPA, 2001

Are there any secondary uses for an infiltration basin?

Yes, the water that flows into the infiltration basin can recharge the groundwater. Stream systems will also benefit from this because the groundwater flows into the streams.

How is an infiltration basin designed?

Infiltration basin sizes are typically 2%-3% of the site that is draining to them. Typically, an infiltration basin will be used in areas less than 10 acres. The soil surrounding the basin should be highly stable so that it does not clog the basin with sediment. The soil in the basin should be highly permeable; soils in infiltration basins are typically sandy, in order to prevent clogging or slow drainage. Most basins are designed so that they can be emptied within 3 or 4 days. Infiltration basins cannot handle very large inflows and therefore are typically used in conjunction with a flow separator to divert excess stormwater from the basin. Many times a drain is also installed so that if the basin becomes clogged, the basin can still be drained and maintenance can be performed.

Where is this type of system most effective?

Infiltration basins can be constructed most anywhere in the country. The biggest exception is areas that are near regions with highly contaminated runoff. The contaminated runoff is less likely to be filtered properly, and could leach into the groundwater. Also, infiltration basins typically require 2%-3% of the site draining to them, and would not be an appropriate system to place in an ultra-urban area.



How much does it cost to install and maintain an infiltration basin?

Costs are highly variable and are largely based upon the permeability of the soil. CED Engineering estimated in 2001 that it would cost approximately \$2 per cubic ft. of storage. Maintenance is also variable. A large portion of the cost comes intermittently to unclog the system.

Are there any special considerations?

Infiltration basins work well in many conditions. When infiltration basins were first put into use they would frequently clog and leave standing water in the basin for many days. This kept the removal rates very low. If an infiltration basin is used as a BMP it should be rigorously maintained so that clogging does not occur. If the area has highly permeable soil it is less likely to clog.


Who should use an infiltration basin?

Typically, infiltration basins have been used as regional facilities, serving for both water quantity and quality control. An infiltration basin's quality control is highly variable upon the type of soil in the area. This type of BMP is most appropriate for areas with sandy soil.

How effective is an infiltration basin at removing pollutants?

The data shown in the following table and graph were obtained from 23 separate studies. An infiltration basin is able to remove approximately 54% of the nitrogen, 60% of the phosphorus, 78% of the BOD, 82% of the TSS and 82% of the bacteria from stormwater runoff.

Percent Removal of Pollutants

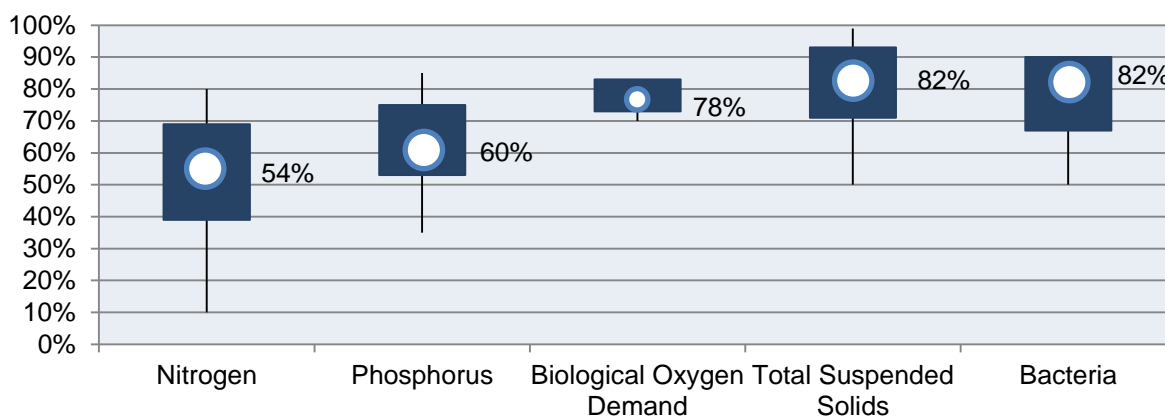

The top of the line represents the maximum value found and the bottom of the line represents the minimum value found. The white point signifies the average of all the found values, also shown numerically next to the white point. The solid colored box represents one standard deviation plus or minus the average. This means 68% of the found values lie within the range of the solid colored box.



INFILTRATION TRENCH

Stormwater Best Management Practices

11

What is an infiltration trench?

An infiltration trench is a channel with no outlet that is filled with rocks. The trench receives stormwater runoff which is held in the trench until it is absorbed into the soil. The soil filters the stormwater so that it may then recharge the groundwater.



Source: http://www.csc.temple.edu/tvssi/bmps/survey/delaware_countycc.htm

Are there any secondary uses for an infiltration basin?

Yes, the water that flows into the infiltration trench can recharge the groundwater. Stream systems will also benefit from this because the groundwater flows into the streams as base flow.

Are there other names for this type of system?

Yes, infiltration trenches are also known as infiltration galleys.

How is an infiltration trench created?

Infiltration trenches are typically used for smaller sites, less than 5 acres, which have high amounts of impervious cover. They are usually installed in areas with sandy soils. The trench itself should be sited on a flat area. The land that surrounds the trench can be as steep as 15 percent. The soil in the trench should be highly permeable, 0.5-3 in. / hr., to reduce the likelihood of clogging. The stormwater runoff should be pretreated by another BMP before entering the trench. Most trenches are designed to be emptied within 24 hours. An observation well should be installed so that the rate of infiltration can be measured. Many times a drain is also installed so that if the trench becomes clogged, it can be drained and maintained.

Where is this type of system most effective?

Infiltration trenches can be constructed most anywhere in the country. The biggest exception is with highly contaminated runoff. The contaminated runoff is less likely to be filtered properly and could leach into the groundwater. There are also some issues with infiltration trenches in colder climates because of permafrost, snowmelt, and road salt.



How much does it cost to install and maintain an infiltration trench?

Costs are highly variable and are largely based upon the permeability of the soil. The California Stormwater Quality Association estimated that it would cost \$5 per cubic ft. of treated volume. Maintenance is also variable and a large portion comes intermittently when the trench becomes clogged.

Are there any special considerations?

When the infiltration trench was first put into use, clogging was an issue. Since the standing water is below grade, mosquitoes and pests are not an issue. Maintenance needs have been determined to reduce the occurrence of clogging. If an infiltration trench is used as a BMP it should be routinely maintained so that clogging is limited.

Who should use an infiltration trench?


Infiltration trenches are generally used on sites less than 5 acres that have a high impervious cover. Native soil conditions will determine design capacity for all locations.

How effective is an infiltration trench at removing pollutants?

The data shown in the following table and graph were obtained from 18 separate studies.

Infiltration trenches are able to remove approximately 56% of the nitrogen, 58% of the phosphorus, 73% of the BOD, 79% of the TSS and 82% of the bacteria from stormwater runoff.

Percent Removal of Pollutants

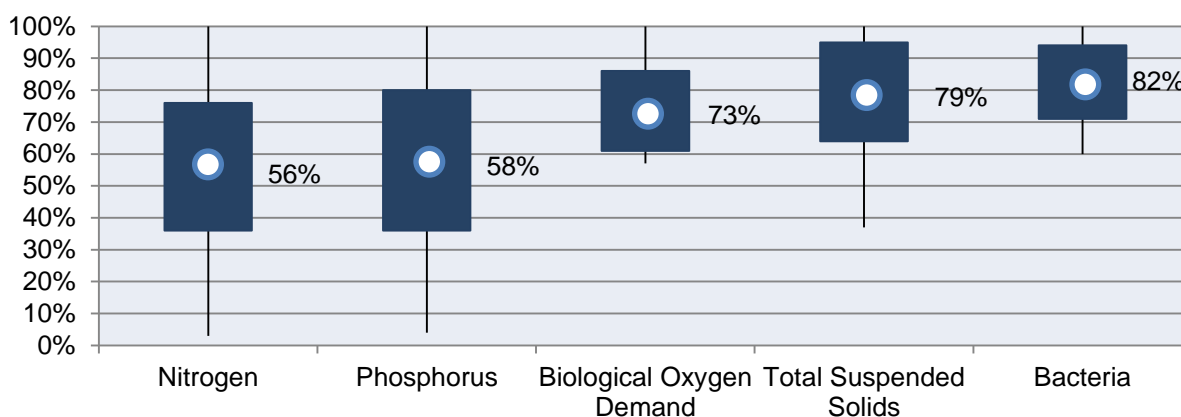

The top of the line represents the maximum value found and the bottom of the line represents the minimum value found. The white point signifies the average of all the found values, also shown numerically next to the white point. The solid colored box represents one standard deviation plus or minus the average. This means 68% of the found values lie within the range of the solid colored box.

Content in this fact sheet was extracted from U.S. EPA National Menu of Best Management Practices



Texas NEMO is an educational program of Texas A&M University, Texas Sea Grant and the Texas AgriLife Extension service, and is an official partner of the National NEMO Network. In addition to support from TAMU, NEMO is funded by grants from the EPA, TCEQ and GBEP.



PERMEABLE PAVEMENT

Stormwater Best Management Practices

12

What is permeable pavement?

Permeable pavement is specially designed pavement with extra pores that allows water to pass through it without compromising the integrity of the material. The permeability of the pavement controls runoff volumes and rates.



Figure 1. Pervious concrete allows water to flow through it. Photo courtesy of the National Ready Mix Concrete Association

Are there any secondary uses for permeable pavement?

Permeable pavement was designed to be used in lieu of typical asphalt or concrete. It can replace most traditional impervious pavement.

How is permeable pavement designed?

Most systems use reduced amounts of sand or fine particles so that more gaps are created in the structure of the pavement. The additional gaps allow water to drain through it. The typical amount of void space in permeable pavement is between 15 and 35 percent, compared to 3-5 percent void space in traditional concrete. Many times pretreatment systems, such as swales and filter strips, are used in conjunction with pervious pavement to prevent clogging. The soil beneath the pavement should be stable and permeable so that the water may be filtered by the soil. When a pavement is poured above a clay base, a drain located underneath the pavement is used to drain the water properly. Most soils around the Houston/Galveston area are clayey. Therefore it is highly recommended.

Are there other names for this type of system?

Yes, there are many different types of permeable pavement including pervious concrete, porous concrete, gap-graded concrete, enhanced porosity concrete, porous pavement, and porous asphalt. There are other materials and designs that are similar to permeable pavement such as permeable interlocking concrete pavement, concrete grid pavement, and modular porous paver system.



How much does it cost to install and maintain permeable pavement?

This technology is recent and is still going through adjustments as more providers enter the market. As of 2005 the National Cooperative Highway Research Program (NCHRP) estimated that the cost of the pervious concrete material would be \$2-\$7 per square ft. The pavement needs the same maintenance as a typical roadway. It should also be unclogged by a vacuum street cleaner when necessary.

Are there any special considerations?

The use of permeable pavement can help offset the amount of additional land and expenses that would be incurred by having to install the typical collection, conveyance, and detention stormwater components. Permeable pavement requires special installation although it is becoming a more frequent practice.


Who should use permeable pavement?

Permeable pavement is typically used as alternatives for sidewalks, driveways, parking lots, or lesser used streets. Permeable pavement can be either poured or built with pavers making it an accessible option for replacing material on any type of land.

How effective is permeable pavement at removing pollutants?

The data shown in the following table and graph were obtained from 22 separate studies. Permeable pavement is able to remove approximately 69% of the nitrogen, 56% of the phosphorus and 84% of the TSS from stormwater runoff.

Percent Removal of Pollutants

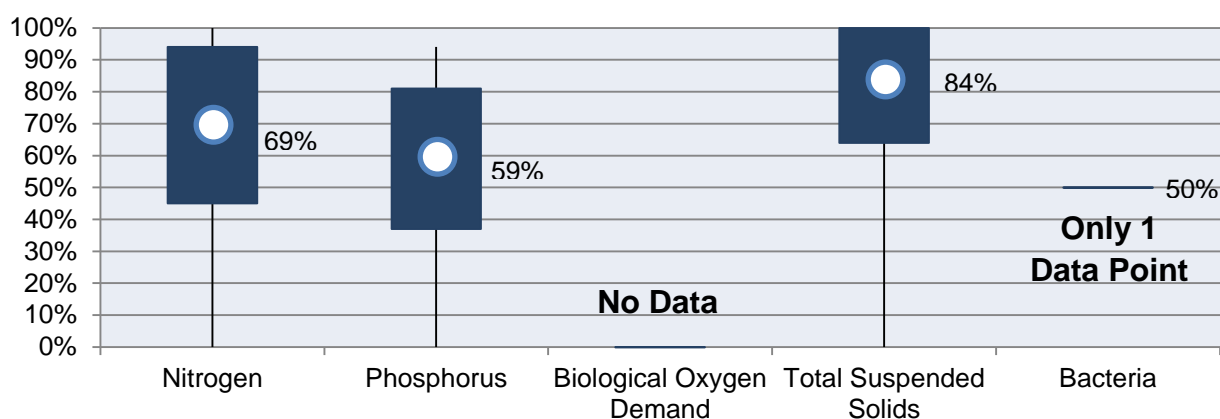

The top of the line represents the maximum value found and the bottom of the line represents the minimum value found. The white point signifies the average of all the found values, also shown numerically next to the white point. The solid colored box represents one standard deviation plus or minus the average. This means 68% of the found values lie within the range of the solid colored box.



BIORETENTION AREAS

Stormwater Best Management Practices

13

What is a bioretention area?

Bioretention areas are planted shallow depressions that collect and treat stormwater runoff through landscaping. They are typically found in suburban environments and small areas of land. The bioretention filters runoff then diverts it into the storm drain system. Bioretention areas are similar to infiltration basins but the emphasis is placed on vegetation in bioretention areas.



Source: EPA, 2001

Are there other names for this type of system?

Yes. A commonly used term for a bioretention area is rain garden.

Can I turn my yard into a bioretention area?

Yes. Most landscaped yards can easily be converted into a bioretention area by selecting the appropriate site and plants.

How is a bioretention area designed?

A bioretention area is typically created in suburban areas with little space for stormwater best management practices. A typical bioretention area is approximately 5%-10% of the size of land that drains to the bioretention area. The maximum amount of land a bioretention area can accommodate is 5 acres, including the bioretention area. Bioretention areas can be created in any type of soil. The slope of the surrounding land should be toward the bioretention area. The filtered water is typically drained to the stormwater system. Rain gardens at commercial sites should use a perforated under drain to move the filtered runoff to the stormwater system. Residential rain gardens do not typically need an under drain system.

What kinds of plants should I put in my bioretention area?

It is preferable to plant native vegetation that also provides habitat value and attracts beneficial insects. The plants selected should be able to withstand both wet and dry conditions. Trees can also be used in bioretention areas. Plants preferring wet soils should be planted in the middle and plants preferring dryer soils along the edge.



How much does it cost to install and maintain bioretention areas?

The EPA uses the following equation to estimate the construction, design, and permitting cost of a bioretention area, approximately as $C = 7.30V$, Where C is the total cost and V is the volume of water treated by the bioretention area in cubic ft. In 2011, the Texas AgriLIFE Extension Service estimated that it would cost \$6 per sq. ft. to install a bioretention area. The maintenance of the bioretention area is similar to the cost of maintaining a typical yard.

Are there any special considerations?

Bioretention areas can be used near stormwater hot spots, areas where highly contaminated runoff may occur. There is one design constraint that should be followed before applying it to this type of area: an impermeable liner should be installed underneath the bed. The liner should be installed so that if any of the runoff bypasses the drain it will not cause any contamination problems to the groundwater.


Who should use a bioretention area?

Bioretention areas are typically used to treat parking lot runoff, residential or roof runoff. Bioretention areas are also well suited for highly urbanized areas.

How effective is a bioretention area at removing pollutants?

The data shown in the following table and graph were obtained from 25 separate studies. A bioretention area is able to remove approximately 51% of the nitrogen, 66% of the phosphorus, 83% of the TSS and 52% of the bacteria from storm water runoff.

Percent Removal of Pollutants

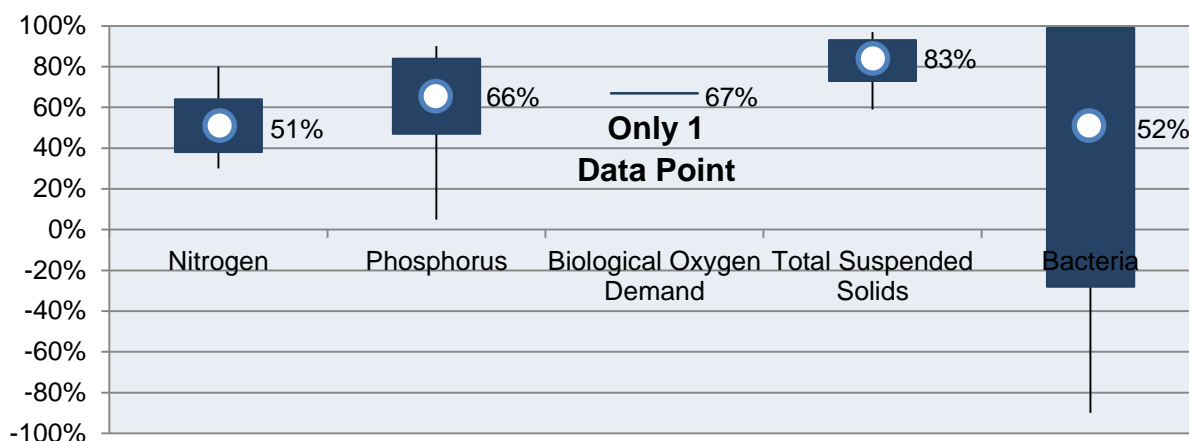

The top of the line represents the maximum value found and the bottom of the line represents the minimum value found. The white point signifies the average of all the found values, also shown numerically next to the white point. The solid colored box represents one standard deviation plus or minus the average. This means 68% of the found values lie within the range of the solid colored box.



WATER QUALITY INLETS

Stormwater Best Management Practices

14

What is a water quality inlet?

Water quality inlets are a group of methods that capture or separate sediment, debris, and pollutants from stormwater runoff as it enters a catchment basin. It typically acts as a pretreatment for other stormwater best management practices. Water quality inlets are typically used in areas with little available space as they normally require only an insert into an existing storm drain.



A worker inserts a catch basin insert for oil and grease, trash, debris, and sediment removal from stormwater as it enters the storm drainage system (Source: Ab Tech Industries, 2001)

Are there other names for this type of system?

Yes. Water quality inlets are also known as catch basin inserts, storm drain inlets or curb inlets. There are many specific types of each of these such as an oil/grit separator which removes oil from incoming runoff.

How does a water quality inlet work?

A water quality inlet can operate in a variety of ways. Most use physical processes to remove larger particles and trash. A grate or curb inlet only allows materials smaller than the inlet area into the basin. A series of media filters can be used to remove smaller particles. The efficiency of the water quality inlet depends heavily on the design of the inlet and on regular maintenance.

How big does the water quality inlet need to be?

The catch basin is the area where the stormwater runoff eventually enters before passing through the water quality inlet. The EPA suggests the following estimates to determine the catch basin size. First, the diameter of the catch basin should be 4 times the size of the outlet pipe diameter. Secondly, the depth should be at least 4 times the size of the outlet pipe diameter. Lastly, the top of the outlet pipe should be 1.5 times the size of the outlet pipe diameter, from the bottom of the inlet to the catch basin. Most catch basins are sized with a margin of safety so if an extremely large rainfall event occurs the catchment basin will still be able to handle most of the incoming rain.



How much does it cost to install and maintain a water quality inlet?

Water quality inlets are highly variable in price. They are priced based upon how efficient they are and the size of particles they can remove. A catch basin insert costs approximately \$2,000-\$3,000 per insert (Study performed by Cambridge University in 2012). Another cost consideration is the cost to remove the debris from the basin and inlets. Cleaning the debris from the inlets will require routine maintenance.

Are there any special considerations?

Water quality inlets and catch basins have three major limitations. First, even if they are designed and maintained properly they cannot remove pollutants as efficiently as other structural stormwater best management practices such as wet ponds or sand filters. Secondly, they require routine maintenance. Lastly, water quality inlets and catch basins cannot successfully remove many of the smaller or soluble particles.


Who should use water quality inlets?

Water quality inlets are typically placed before or in municipal storm sewer lines. Water quality inlets are also placed in storm sewer lines that are exiting commercial buildings. Water quality inlets are generally not used by individual residents of a community.

How effective is a water quality inlet at removing pollutants?

The data shown in the following table and graph were obtained from 18 separate studies. Water quality inlets remove approximately 11% of the nitrogen, 6% of the phosphorus, 59% of the BOD and 43% of the TSS from stormwater runoff.

Percent Removal of Pollutants

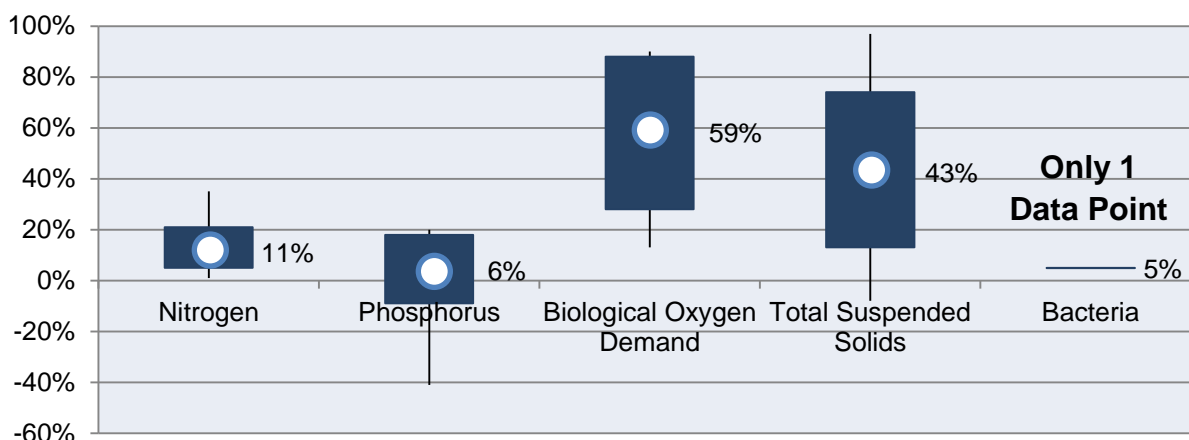

The top of the line represents the maximum value found and the bottom of the line represents the minimum value found. The white point signifies the average of all the found values, also shown numerically next to the white point. The solid colored box represents one standard deviation plus or minus the average. This means 68% of the found values lie within the range of the solid colored box.




SAND AND ORGANIC FILTERS

Stormwater Best Management Practices

15

What is a sand and organic filter?

Sand and organic filters typically consist of two chambers. The first chamber is a settling chamber and the second chamber is filled with sand or other filtering organic material. The bottom of the filter contains a drain so that the filtered water can be moved away from the filter. Gravel is used to hold both the drain and sand in place. Sand and organic filters may be used as a stand-alone practice or as a pretreatment for an infiltration practice.

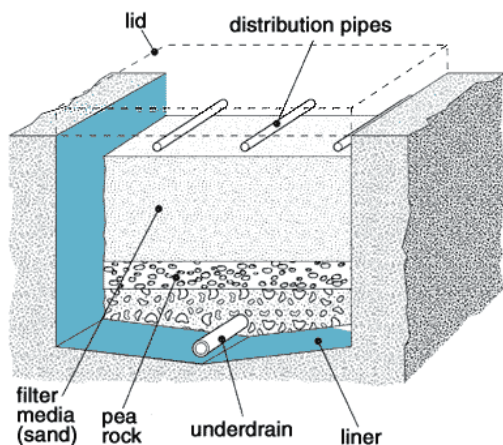

Source:
<http://www.extension.umn.edu/distribution/naturalresources/DD7672.html>

Can sand and organic filters negatively affect groundwater?

No. However, it is advised that there should be at least 2 ft. of separation between the bottom of the filter and the high point of the groundwater to prevent structural damage to the filter.

How does a sand and organic filter work?

The first chamber, not filled with sand, allows large particles to settle out of the water on the top of the sand layer where they are caught. A small perforated pipe then removes the water from the first chamber and deposits it into the second chamber. The second chamber filters out the smaller particles by capturing the smaller particles in the spaces between the grains of sand. Sand and organic filters should not be used on large sites. They are most efficient at treating runoff from sites less than 10 acres for surface sand filters and less than 2 acres for perimeter or underground sand filters. There should be some slope from the land supplying the runoff because the filter requires an elevation drop between the land and the filter. It is suggested that a minimum elevation drop of 5 ft. for underground and surface sand filters while the perimeter sand filter requires a minimum of a 2 ft. elevation drop.

Are there other names for this type of system?

Yes. Sand and organic filters are also known as organic media filters, and multi-chamber treatment chains. There are variations of the basic sand and organic filters such as underground sand filters, surface sand filters, and perimeter sand filters. There are different rules, regulations, design standards, and placement concerns for each of the variations.



How much does it cost to install and maintain a sand and organic filter?

The cost varies widely and depends upon the type of filter and the variation of the filter. The EPA estimated in 2006 that it would cost approximately \$5 per cubic ft. of stormwater treated. The maintenance costs of the filters come from monthly cleaning of debris and the prevention of clogging. Clogging occurs when large particles are not effectively removed in the first chamber.

Are there any special considerations?

A sand and organic filter can be used to treat stormwater hotspots. Stormwater hotspots refer to any type of land that generates highly contaminated runoff such as commercial nurseries, storage areas, marinas, and vehicle cleaning facilities. Sand and organic filters are well equipped to treat the hotspots because they have no interaction with the groundwater.


Who should use a sand and organic filter?

Underground and perimeter sand and organic filters are excellent choices for urban areas because of the minimal area needed. These types of filters work best for smaller drainage areas.

How effective is a sand and organic filter at removing pollutants?

The data shown in the following table and graph were obtained from 43 separate studies. A sand and organic filter is able to remove approximately 37% of the nitrogen, 49% of the phosphorus, 59% of the BOD, 80% of the TSS and 49% of the bacteria from stormwater runoff.

Percent Removal of Pollutants

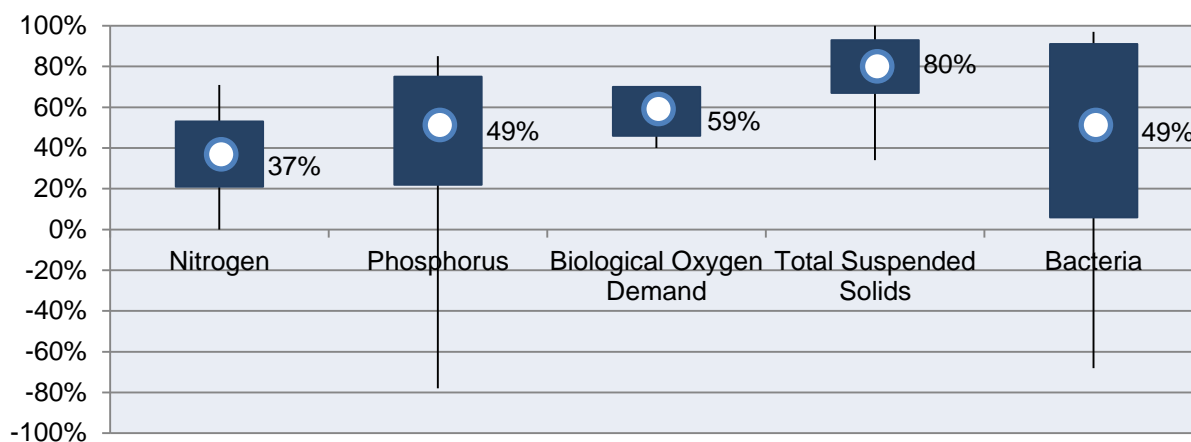

The top of the line represents the maximum value found and the bottom of the line represents the minimum value found. The white point signifies the average of all the found values, also shown numerically next to the white point. The solid colored box represents one standard deviation plus or minus the average. This means 68% of the found values lie within the range of the solid colored box.



VEGETATED FILTER STRIPS

Stormwater Best
Management Practices

16

What is a vegetated filter strip?

Vegetated filter strips are vegetated areas that slow and treat sheet flow from stormwater runoff. Typically they are rectangular but can be constructed in almost any shape. Vegetated filter strips are typically installed along the sides of roads and highways, near roof downspouts, and around parking lots. They require a large amount of space and are not normally seen in ultra-urban areas. Vegetated filter strips were originally an agricultural best management practice but have slowly caught on in urban areas. The main difference between a swale and a filter strip is that filter strips receive evenly distributed flows but do not direct water off site, whereas swales receive concentrated flows and direct these flows.



Source: <http://www.semcog.org/data/lid.report.cfm?lid=170>

Are there other names for this type of system?

Yes. Vegetated filter strips are also known as grassed filter strips, filter strips, and grassed filters.

How does a vegetated filter strip work?

Vegetated filter strips work by slowing the stormwater runoff. Slowing the runoff velocity allows larger particles to settle out of the water and into the filter strip. The vegetation is able to filter out many of the smaller particles. Slowing the water allows some of the water to infiltrate into the underlying soils which filters out more pollutants. Vegetated filter strips are used to treat small drainage areas, typically less than 1 acre.

How is a vegetated filter strip designed?

A small pea gravel trench runs along the top edge of the strip so flows can spread out along the length of the strip as well as for pretreatment. The bottom of the strip should contain a small area for ponding. Most filter strips are at least 25 ft. long and are built on land with a slope between 2 and 6 percent. The plant material used to fill the filter strip should be able to withstand both dry and wet conditions. Highly clayey soils may limit infiltration performance.



How much does it cost to install and maintain a vegetated filter strip?

The average cost of a vegetated filter strip in 2001 was around \$13,000-\$30,000 per acre. Filter strips have similar maintenance requirements as other vegetative practices, such as grassed swales. The biggest maintenance concern is making sure that the water flow does not get concentrated in channels allowing it to bypass the filter.

Are there any special considerations?

In determining if a vegetated filter strip is appropriate, remember that the vegetation is important to the success of the water filtration. This means that the vegetation needs to be properly maintained and watered during periods of drought or in arid regions of the country. Also, holding too much water may cause issues and breed pests.


Who should use a vegetated filter strip?

Vegetated filter strips are best suited for treating runoff from roads and highways, roof downspouts, very small parking lots, and pervious surfaces. Vegetated filter strips are also occasionally used as the outer zone of a forested riparian buffer. They can also be used as pretreatment for other structural BMPs.

How effective is a vegetated filter strip at removing pollutants?

The data shown in the following table and graph were obtained from 19 separate studies. Vegetated filter strips are able to remove approximately 24% of the nitrogen, 19% of the phosphorus, 65% of the TSS and 33% of the bacteria from stormwater runoff.

Percent Removal of Pollutants

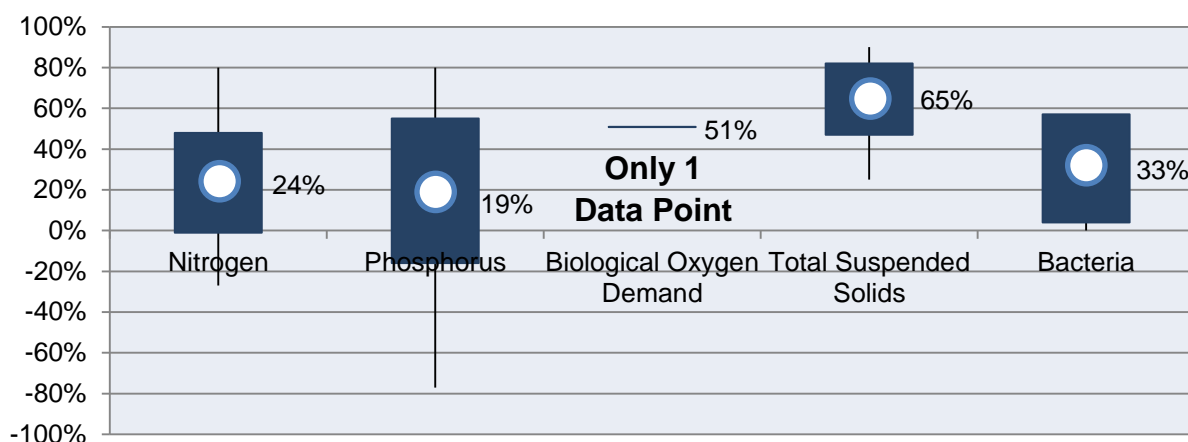

The top of the line represents the maximum value found and the bottom of the line represents the minimum value found. The white point signifies the average of all the found values, also shown numerically next to the white point. The solid colored box represents one standard deviation plus or minus the average. This means 68% of the found values lie within the range of the solid colored box.

Content in this fact sheet was extracted from U.S. EPA National Menu of Best Management Practices



Texas NEMO is an educational program of Texas A&M University, Texas Sea Grant and the Texas AgriLife Extension service, and is an official partner of the National NEMO Network. In addition to support from TAMU, NEMO is funded by grants from the EPA, TCEQ and GBEP.



DRY DETENTION BASIN

Stormwater Best
Management Practices

17

What is a dry detention basin?

A dry detention basin is large, typically vegetated basin that only holds water for a short period after it rains. The basin has outlets designed to detain stormwater runoff for 24 hours. They are called dry detention basins because they do not hold water permanently. The biggest difference between an infiltration basin and a dry detention basin is that a majority of the water that enters a dry detention basin does not permeate into the ground.



Source: EPA, 2001

Are there other names for this type of system?

Yes. Dry detention basins are also known as dry ponds, extended detention basins, detention basins, extended detention ponds, and detention tanks.

Are there any secondary uses for this system?

Yes. Dry detention basins can also be used for flood control by providing flood detention storage.

How does a dry detention basin work?

Dry detention basins work by allowing larger particles and sediment to settle out of the water column. Once the particles have settled to the bottom of the pond they get caught in the soil. Dry detention basins should not be used as a single pollution solution because they do not have a high efficiency. Dry detention basins are primarily used for volume flood control.

How is a dry detention basin designed?

Dry detention basins are typically quite large and require a large amount of land to construct. A typical dry detention basin is generally used on sites larger than 10 acres, although smaller sites work. The slope of the adjacent land can be high. The slope immediately around the pond should be lower. The EPA recommends that the pond be built using a length-to-width ratio of at least 1.5:1. Almost all soil types can work in a dry detention basin with some minor adjustments. Dry detention basins that come in contact with highly contaminated runoff should be lined with an impermeable liner so that the groundwater does not become contaminated. Also, the basin should not be so deep that it intersects the groundwater table. This would cause a permanent pool of water in the bottom which could be a potential breeding ground for mosquitoes.



How much does it cost to install and maintain a dry detention basin?

A fairly common equation used to price a dry detention basin is:

$$C = 12.4 * V^{0.76}$$

Where C is the construction cost of the dry detention basin and V is the volume needed to control a 10-year storm in cubic ft. This equation was created in 1997 and should be adjusted for inflation to express a more accurate estimate.

Are there any special considerations?

A dry detention basin should never intersect the groundwater table. In Texas, specifically near the coast, the groundwater table is not very deep. This means that the detention basin cannot be dug deeper in order to have the required amount of volume in the dry detention basin. The length or width of the detention basin must be changed which would require a larger amount of land.


Who should use a dry detention basin?

Dry detention basins are one of the most widely used BMPs and can be applied to all regions of the country. Many dry detention basins are used for flood control as well as water quality improvement. Dry detention basins are typically used for sites larger than 10 acres.

How effective is a dry detention basin at removing pollutants?

The data shown in the following table and graph were obtained from 32 separate studies. A dry detention basin is able to remove approximately 32% of the nitrogen, 29% of the phosphorus, 38% of the BOD, 61% of the TSS and 67% of the bacteria from stormwater runoff.

Percent Removal of Pollutants

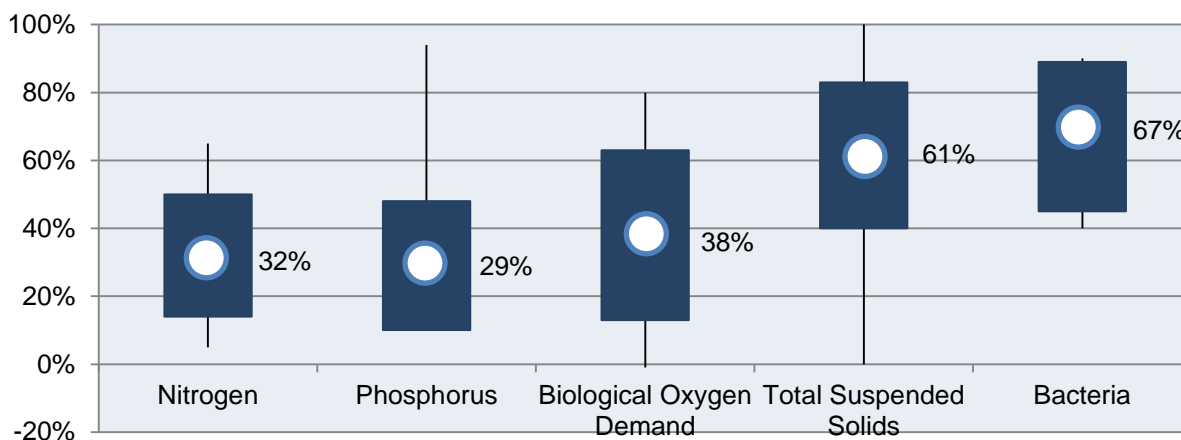

The top of the line represents the maximum value found and the bottom of the line represents the minimum value found. The white point signifies the average of all the found values, also shown numerically next to the white point. The solid colored box represents one standard deviation plus or minus the average. This means 68% of the found values lie within the range of the solid colored box.



STORMWATER WETLAND

Stormwater Best Management Practices

18

What is a stormwater wetland?

A stormwater wetland is a constructed pond that integrates natural wetland vegetation. Stormwater wetlands actively filter stormwater runoff by allowing the particles to settle in the standing water and by filtering the smaller particles through infiltration. Not only are stormwater wetlands efficient at removing pollutants from runoff, they also provide an aesthetic value and significant habitat for resident wildlife. The surface area of a stormwater wetland is typically 1% of the area draining into it.



A group of people help to plant new wetland vegetation

Source: EPA, 2001

Are there other names for this type of system?

Yes. Recent human disturbances have disrupted many of the natural wetlands. Therefore, many wetlands are now being artificially created, these are known as artificial or constructed wetlands.

Do I need a permit to replant or construct an artificial wetland?

It depends. If you are performing any restoration on a wetland you must get a permit from the U.S. Army Corps of Engineers. This is specified under the Clean Water Act, Section 404. It states that you need a permit if the wetland has a significant connection to a navigable waterway. Traditionally, the U.S. Army Corps of Engineers is not involved with artificial wetland permitting but it is highly advised to contact them to determine if you need a permit to construct the wetland.

What type of plants should I put in a wetland?

The proposed development site's history should be researched. This includes previous vegetation, typical conditions, and hydrologic characteristics. These factors will heavily influence which plants should be selected. It is important to keep the plant species diverse to keep one particular plant from dominating the wetland. It is also important to plant riparian vegetation along the banks of the wetland. Vegetation will help keep the banks stable and reduce water temperatures. The efficiency of using a stormwater wetland to remove pollutants is highly variable and depends on the types of plants used. A local Extension representative, such as the Texas Coastal Watershed Program, is a good source of technical information.



How much does it cost to install and maintain a stormwater wetland?

The cost to install an artificial wetland is highly variable and depends on the amount of restoration or construction. The EPA estimates that constructing a wetland is approximately 25% more expensive than a stormwater pond of an equivalent volume. The EPA also estimated that the annual maintenance of the wetland is about 3%-5% of the construction cost.

Are there any special considerations?

Regular maintenance is important, and steps should be taken to minimize erosion in areas surrounding the wetland. Sediment will accumulate and change the flow pattern in the wetland. The biggest maintenance consideration is invasion of non-native plant life. Invasive plant species should be removed wherever possible. Managing cattails should also be a maintenance priority because they are an optimal space for mosquito breeding. Cattails should be avoided and make up <10% of the total vegetation.


Who should use a stormwater wetland?

Stormwater wetlands are typically at least 1% of the drainage area and should have a length-to-width ratio of 1.5:1. Stormwater wetlands should not negatively impact natural wetlands or forests. Most stormwater wetlands are used for treatment in suburban or rural areas.

How effective is a stormwater wetland at removing pollutants?

The data shown in the following table and graph were obtained from 31 separate studies. A stormwater wetland is able to remove approximately 35% of the nitrogen, 47% of the phosphorus, 39% of the BOD, 74% of the TSS and 72% of the bacteria from stormwater runoff.

Percent Removal of Pollutants

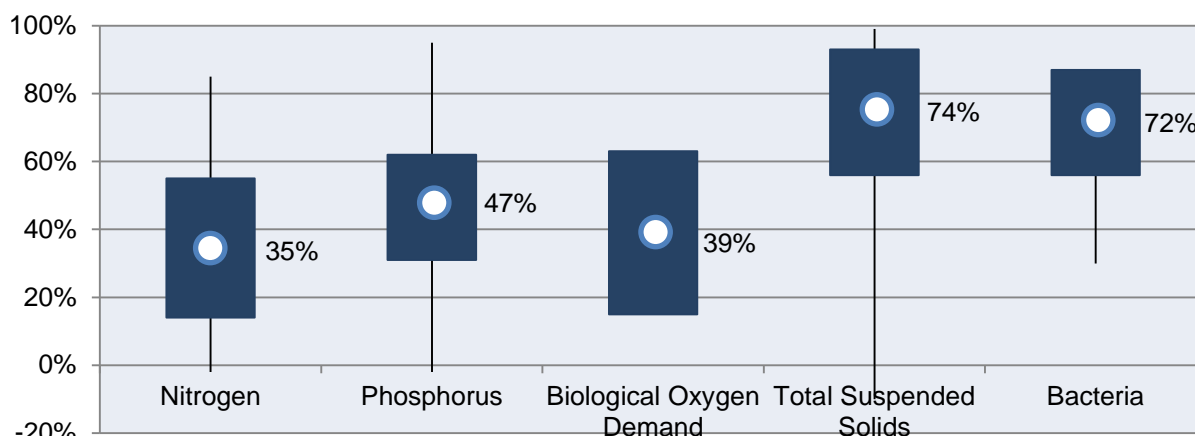

The top of the line represents the maximum value found and the bottom of the line represents the minimum value found. The white point signifies the average of all the found values, also shown numerically next to the white point. The solid colored box represents one standard deviation plus or minus the average. This means 68% of the found values lie within the range of the solid colored box.



WET DETENTION POND

Stormwater Best Management Practices

19

What is a wet detention pond?

A wet detention pond is a constructed basin with a permanent pool of water throughout the year. Wet detention ponds are a commonly seen stormwater best management practice. They can be applied to almost any situation and can be installed throughout the country. The primary limitations of a wet detention pond are the size of the pond and the use in more arid regions of the country. Wet detention ponds allow larger particles to settle out of the water. Smaller particles are removed through infiltration of the vegetation on the sides of the basin. The main difference between a wet detention pond and a stormwater wetland is that a wet detention pond does not rely on vegetation for filtration.



Source: EPA, 2001

Are there other names for this type of system?

Yes. Wet detention ponds are also called wet ponds, stormwater ponds, wet retention ponds, wet extended detention ponds, settling basins, retention basins, or sediment basins.

How is a wet detention pond designed?

Wet detention ponds need a large enough drainage area so that they can maintain the permanent pool. In more humid regions, like the Texas Gulf Coast, it typically requires about 25 acres. The drainage area size should be larger in areas where it rains less. The slope of the adjacent land can be up to 15 percent but the land near the pond should be relatively flat with a slight slope toward the outlet of the pond. This will ensure that the water continuously flows toward the outlet. Wet detention ponds can be used in almost any soil type. A wet detention pond, unlike a dry detention pond, is able to cross the boundary of the groundwater. However, some studies have shown that when groundwater contributes significant amounts of water to the pond, it may decrease the pollutant removal efficiency. Water should pass through a small basin before reaching the detention pond so that the largest particles can settle out of the water, decreasing sedimentation in the main pond and reducing the amount of maintenance needed. The EPA recommends that the pond be built using a length-to-width ratio of at least 1.5:1. The EPA also recommends using underwater berms so water travels a further distance, thus allowing the particles to have a longer time to settle. A vegetated buffer should be placed along the edges of the pond to provide shade.



How much does it cost to install and maintain a wet detention pond?

One commonly used equation by the EPA to estimate the construction cost of a wet detention pond was created in 1997 but is adjusted for inflation:

$$C = 24.5 * V^{0.705}$$

Where C is the construction cost and V is the volume of the pond that is capable of carrying a 10-year storm. Annual maintenance costs are about 3% to 5% of the construction cost.

Are there any special considerations?

Some companies are beginning to reuse the pond water for non-potable uses such as irrigation. In this case, then the daily amount of water intake and output should be calculated for the pond to ensure that a constant pool of water is maintained. One study performed at a Florida golf course concluded that reusing the pond water would cost about 1/7th the typical irrigation cost.


Who should use a wet detention pond?

Typically, a wet detention pond is used in a neighborhood, community, or recreational parks. If a wet detention pond is landscaped well it adds to the aesthetic value of these places and can make the wet detention pond an asset to that community. The water in the pond may also be used for other needs such as irrigation.

How effective is a wet detention pond at removing pollutants?

The data shown in the following table and graph were obtained from 31 separate studies. A wet detention pond is able to remove approximately 36% of the nitrogen, 52% of the phosphorus, 57% of the BOD, 66% of the TSS and 62% of the bacteria in stormwater runoff.

Percent Removal of Pollutants

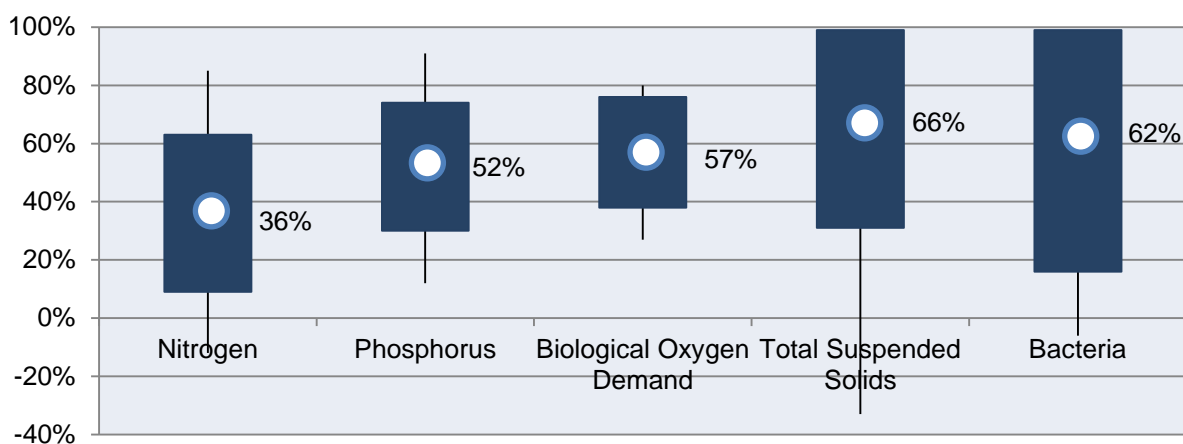

The top of the line represents the maximum value found and the bottom of the line represents the minimum value found. The white point signifies the average of all the found values, also shown numerically next to the white point. The solid colored box represents one standard deviation plus or minus the average. This means 68% of the found values lie within the range of the solid colored box.



HOW TO PICK THE RIGHT BEST MANAGEMENT PRACTICE

Stormwater Best Management Practices

20

What is a Best Management Practice?

Best Management Practices (BMPs) are practices that help treat, store, and infiltrate stormwater runoff from impermeable areas. If BMPs were not installed, the contaminated stormwater runoff would negatively impact the local water bodies downstream. The technology used in BMPs varies widely. Some rely on complicated chemical processes while others rely on simple, physical processes. They range in size from a few square feet to many cubic yards. Some BMPs are not based on structure or technology at all. For example, if you can educate the local community to stop performing adverse behavior, that action will help reduce the amount of pollutants in the water with no installation of a physical structure. BMPs, if properly installed and maintained can last for many years and help lessen water contamination.

Is it required that I install a Best Management Practice?

Yes, but only if it is a new development or redevelopment that disturbs more than one acre and happens in either a Phase I or Phase II MS4 (Municipal Separate Storm Sewer Systems). Everyone is encouraged to install a BMP on their property but it is only required by the people meeting the criteria mentioned above.

Why do I need a Best Management Practice?

Water that runs through impermeable areas is highly susceptible to becoming contaminated with pollutants that it picks up on its way out. That runoff eventually enters either a natural body of water or a storm drain. Either way, the contaminated runoff water then negatively affects the water it mixes with. This can cause serious impairments to water that are used as recreation sites or as a drinking water source. BMPs help reduce the amount of contaminants that make it into these bodies of water.

How do I know which BMP is right for me?

There are many questions that must be addressed before a final decision can be made. The first questions that should be asked are:

1. How big is your property?
2. How much space and what shape of the space is available for a BMP?
3. How effective should the BMP be?
4. Are there any BMPs already installed on the property?

More questions may need to be asked before making a final decision. If there are multiple practices that fit into these categories then a secondary tool that can be used is called a score sheet.



BEST MANAGEMENT PRACTICES 20

6/8/2012

What is a score sheet?

A score sheet is a method of determining which BMP would best fit your needs. Make a table that has the BMPs that match what you are looking for in each column. Each row has various concerns that should be taken into consideration such as, pollutant reduction (one column for each pollutant), cost, secondary uses, public acceptance, and maintenance costs. Any other special considerations that you would like to consider should also be entered. Each cell would then be numbered on a scale of 1-5, based on the appropriate measures, with 1 being the worst and 5 being the best. During this process you should make the assumption that each practice will be installed and maintained properly. After each number has been selected, take the average number of each column. The BMP with the highest average would be the most appropriate selection for your land. Make sure to write notes on the method used to select a BMP.

Can I use multiple BMPs in a series?

Yes. If you choose to use multiple BMPs in a series, the rate of flow will decrease and the amount of contaminants will significantly decrease. If you do choose to use multiple BMPs in a series you cannot add the removal efficiencies together to determine the final removal efficiency. You must perform the removal efficiencies separately. This is because the water flows through the first BMP and some percentage of contaminated water still remains. The second removal efficiency only alters the remaining contaminant concentration.

Is there someone who can help me select the appropriate BMPs?

Any local Extension office should be able to answer any questions or help you select BMPs that would best suit your needs should you run into any conflicts.

Management Practice	Bioretention Area	Riparian Buffer	Wetland
Nitrogen Removal*	3	3	2
Phosphorus Removal*	4	2	3
BOD Removal*	4	3	2
TSS Removal*	5	4	4
Bacteria Removal*	3	No Data	4
Cost [†]	1	5	3
Secondary Uses [†]	3	5	3
Public Acceptance [†]	5	5	3
Maintenance [†]	3	3	5
Average Score	3.44	3.75	3.22

*Based on a numbering system of 0%-19% = 1, 20%-39% = 2, 40%-59% = 3, 60%-79% = 4, 80%-100% = 5.

[†] Chosen when compared to the other selected BMPs.



Content in this fact sheet was extracted from U.S. EPA National Menu of Best Management Practices

Texas NEMO is an educational program of Texas A&M University, Texas Sea Grant and the Texas AgriLife Extension service, and is an official partner of the National NEMO Network. In addition to support from TAMU, NEMO is funded by grants from the EPA, TCEQ and GBEP.

Stormwater BMP Factsheet References

- 9.0 *Pollutant Loadings for Municipal Storm Outfalls and Removal by Associated BMPs*. Monocacy & Catoclin Watershed Alliance, 2010. Web. 7 Jun 2012. <<http://www.watershed-alliance.com/publications/AnnualReports/AnnualReport2009/Ch9-2009.pdf>>.
- Alabama. Department of Transportation. *Construction Stormwater BMP Review Guidance for Impaired Water(s) with EPA-Approved or Established TMDL(s)*. 2011. Web. <http://www.dot.state.al.us/dsweb/frm/NewGuidelinesforTMDLsperADEM_7_14_2011.pdf>.
- An Evaluation of Cost and Benefits of Structural Stormwater Best Management Practices in North Carolina*. North Carolina State University, 2003. Web. 7 Jun 2012. <<http://www.bae.ncsu.edu/people/faculty/hunt/bmpcosts&benefits.pdf>>.
- "Best Management Practice Summaries." *Best Management Practices for Sediment Control and Water Clarity Enhancement*. Chesapeake Bay Program, 2006. Web. 7 Jun 2012. <http://www.chesapeakebay.net/content/publications/cbp_13369.pdf>.
- Bitting, Jennifer. *A Methodology and Evaluation Tool for Comparing Post-construction Storm Water Best Management Practises*. Cambridge University Engineering Department, 2006. Web. 7 Jun 2012. <http://www.waterboards.ca.gov/centralcoast/water_issues/programs/stormwater/docs/special_projects/eval_tool.pdf>.
- British Columbia. Environmental Protection Division. *Detention/Retention*. 1994. Web. <http://www.env.gov.bc.ca/wat/wq/nps/BMP_Compendium/Municipal/Urban_Runoff/Treatment/DeteDeten.htm>.
- California. California Stormwater Quality Association. *California Stormwater BMP Handbook*. 2003. Web. <<http://www.cabmphandbooks.com/Development.asp>>.
- Claytor, Richard, and Thomas Schueler. *Design of Stormwater Filtering Systems*. Chesapeake Research Consortium, Inc., 1996. Web. 7 Jun 2012. <http://pittsburghpermaculture.org/wp-content/uploads/2010/04/stormwater_filtration_system_design.pdf>.
- Davenport, Thomas E.. "Urban NPS Measures." 2010. Print.
- Gedeon, Gilbert. *Post Construction Storm Water Management - Structural BMP's*. CED Engineering, 2001. Web. 7 Jun 2012. <<http://ws012.cedengineering.com/upload/PostConstructionSWM-StructuralBMPs.pdf>>.
- Greenville County, South Carolina. Land Development Division. *Appendix G: Approved Water Quality BMPs and Water Quality Factors for Fee Credit Calculations*. 2010. Web. <http://www.greenvillecounty.org/land_development/pdf/designmanual/AppendixG_Approved_WQ_BMPs_Factors_FeeCredits.pdf>.
- Hallock, Dave. Washington. Department of Ecology. *Efficiency of Urban Stormwater Best Management Practices: A Literature Review*. 2007. Web. <<http://fortress.wa.gov/ecy/publications/publications/0703009.pdf>>.
- Haubner, Steve, Andy Reese, Ted Brown, Rich Claytor, and Tom Debo. Georgia. Department of Natural Resources. *Georgia Stormwater Management Manual*. 2001. Web. <<http://documents.atlantaregional.com/gastormwater/GSMMVol2.pdf>>.
- Horst, Michael, Robert Traver, and Erika Tokarz. "BMP Pollutant Removal Efficiency." 2008. Web. 14 Jun. 2012. <[http://scitation.aip.org/lib-ezproxy.tamu.edu:2048/getpdf/servlet/GetPDFServlet?filetype=pdf&id=ASCECP000316040976000429000001&idtype=cvips&doi=10.1061/40976\(316\)429&prog=normal](http://scitation.aip.org/lib-ezproxy.tamu.edu:2048/getpdf/servlet/GetPDFServlet?filetype=pdf&id=ASCECP000316040976000429000001&idtype=cvips&doi=10.1061/40976(316)429&prog=normal)>.
- "How To Select a BMP." *Quality Assurance for Nonpoint Source Best Management Practices (BMPs)*. Low Impact Development Center, 2005. Web. 7 Jun 2012. <http://www.lowimpactdevelopment.org/qapp/bmp_table2.htm>.

- Knox County, Tennessee. *Design and Maintenance of Structural BMPs*. 2008. Web.
<<http://www.knoxcounty.org/stormwater/pdfs/vol2/Vol2 Chap 4 Design and Maintenance of Structural BMPs.pdf>>.
- Lee, G. Fred. *The Right BMPs?*. 2000. Web. 14 Jun 2012. <http://www.gfredlee.com/stormwater_bmp_1000.pdf>.
- Maniquiz, Marla, So-Young Lee, and Lee-Hyung Kim. *Long-Term Monitoring of Infiltration Trench for Nonpoint Source Pollution Control*. Springer, 2010. Web. 7 Jun 2012. <<http://www.springerlink.com.lib-ezproxy.tamu.edu:2048/content/m72m7m0680112715/fulltext.pdf?MUD=MP>>.
- Maryland. Department of Environment. *Maryland's Urban Stormwater Best Management Practices by Era Proposal*. 2009. Web.
<http://www.mde.state.md.us/programs/Water/TMDL/Documents/www.mde.state.md.us/assets/document/Appendix_F_MD_Stormwater_Management_By_Era.pdf>.
- Massachusetts. Department of Environmental Protection. *Volume 2 Chapter 2: Structural BMP Specifications for the Massachusetts Stormwater Handbook*. 2008. Web. <<http://www.mass.gov/dep/water/laws/v2c2.pdf>>.
- National Pollutant Removal Performance Database Version 3. Center for Watershed Protection, 2007. Web. 7 Jun 2012.
<<http://www.stormwaterok.net/CWP Documents/CWP-07 Natl Pollutant Removal Perform Database.pdf>>.
- New Hampshire. Department of Environmental Services. *New Hampshire Stormwater Manual Volume 2 Post-Construction Best Management Practices Selection & Design*. 2008. Web.
<<http://des.nh.gov/organization/commissioner/pip/publications/wd/documents/wd-08-20b.pdf>>.
- New Jersey. Department of Environmental Protection. *New Jersey Stormwater Best Management Practices Manual Chapter 4 Stormwater Pollutant Removal Criteria*. 2004. Web.
<http://www.state.nj.us/dep/stormwater/bmp_manual/NJ_SWBMP_4 print.pdf>.
- North Carolina. Department of Environment and Natural Resources. *NCDENR Stormwater BMP Manual Chapter 4 Selection the Right BMP*. 2009. Web. <http://portal.ncdenr.org/c/document_library/get_file?uuid=8c575385-7ce4-47a2-86f5-2a4cf415160e&groupId=38364>.
- Pennsylvania. Department of Environmental Protection. *Pennsylvania Stormwater Best Management Practices Manual*. 2006. Web. <http://www.elibrary.dep.state.pa.us/dsweb/Get/Document-48481/11_Appendix_A.pdf>.
- Prince George's County, Maryland. Department of Environmental Resources. *Bioretention Manual*. 2007. Web.
<http://www.princegeorgescountymd.gov/Government/AgencyIndex/DER/ESG/Bioretention/pdf/Bioretention Manual_2009 Version.pdf>.
- Quasebarth, Thomas, Kelly Cave, Richard Wagner, Douglas Denison, Mark Mikesell, and Amarjit Sidhu. *Nonpoint Source Data Assessment and Field Investigation*. Rouge River National Wet Weather Demonstration Project, 1994. Web. 7 Jun 2012. <<http://www.rougeriver.com/pdfs/nonpoint/tr03.pdf>>.
- Tetra Tech, Inc.,. *STEPL 4.1*. 30 06 2010. *BMPList*. Database. 7 Jun 2012. <[http://it.tetratetech-ffx.com/steplweb/models\\$docs.htm](http://it.tetratetech-ffx.com/steplweb/models$docs.htm)>.
- United States. Department of Transportation. *Stormwater Best Management Practices in an Ultra-Urban Setting: Selection and Monitoring*. Washington, D.C.: Federal Highway Administration, 1998. Web.
<<http://environment.fhwa.dot.gov/ecosystems/ultraurb/index.asp>>.
- United States. Environmental Protection Agency. *National Menu of Best Management Practices*. Web.
<<http://cfpub.epa.gov/npdes/stormwater/menuofbmps/index.cfm?action=browse>>.
- Virginia. Department of Conservation and Recreation. *Appendix C: Updated BMP Removal Efficiencies from the National Pollutant Removal Database (2007) & Acceptable BMP Table for Virginia*. 2007. Web.
<<http://www.dcr.virginia.gov/documents/stmwtrcwprptappc.pdf>>.

- Wossink, Ada, and Bill Hunt. *The Economics of Structural Stormwater BMPs in North Carolina*. North Carolina State University, 2003. Web. 7 Jun 2012.
<<http://www.bae.ncsu.edu/stormwater/PublicationFiles/EconStructuralBMPs2003.pdf>>.
- Wyoming. Department of Environmental Quality. *Urban Best Management Practices for Nonpoint Source Pollution*. 1999. Web.
<[http://deq.state.wy.us/wqd/watershed/Downloads/NPS Program/92171.pdf](http://deq.state.wy.us/wqd/watershed/Downloads/NPS%20Program/92171.pdf)>.
- Xiao, Min, and Nancy Sullins. Harris County, Texas. *Post-Construction BMP Effectiveness Data Collection*. 2009. Web.
<http://www.eng.hctx.net/watershed/docs/post-construction_BMP_effectiveness_data_collection.pdf>.

Appendix 5 - Funding Sources

Federal

Agricultural Water Enhancement Program (AWEP)

Entity: Natural Resources Conservation Service (NRCS)

Provides financial and technical assistance to agricultural producers to implement agricultural water enhancement activities on agricultural land to conserve surface and ground water and improve water quality. Eligible entities or organizations form multi-year partnership agreements with NRCS to promote ground and surface water conservation.

Eligibility: Individual producers are not eligible. Eligible partners include: Federally recognized Indian Tribes, States, units of local government, agricultural or silvicultural associations or other groups of such producers and other nongovernmental organization with experience working with agricultural producers. Agricultural land must be in AWEP approved project areas.

Funding limitations: Financial assistance changes every fiscal year depending upon appropriations and agency priorities.

Coastal and Estuarine Land Conservation Program (CELCP)

Entity: National Oceanic Atmospheric Association (NOAA)

This program is intended to provide financial assistance to purchase significant coastal and estuarine lands, or conservation easements on such lands, from willing sellers. Lands or conservation easements acquired under this program are to be protected in perpetuity due to their importance for their ecological, conservation, recreational, historical or aesthetic values.

Eligibility: Participants must be in a state that has developed a CELCP plan for NOAA approval. The Texas CELCP plan was approved in 2010. An eligible public entity such as local governments, state or federal agencies, institutions of higher education, or other authority such as park districts must submit the project proposal. Projects must complement working waterfront needs and advance the goals, objectives or implementation of local coastal management plans in addition to the state's CELCP plan.

Funding limitations: The program funds up to \$3M per project, which is matched 1:1 with non-federal funds from the public entity participant. The budget for projects under this program may vary annually contingent on the fiscal year budget. NOAA maintains a contingency list of projects in the case that a project falls through or additional funds become available. Projects unable to be funded for a particular fiscal year will remain on the list until it is superseded.

Community Development Block Grants

Entity: States and local jurisdictions

This program is intended to address one or more of the following: benefit low- and moderate-income persons, prevention or elimination of slums or blight, or address community development needs having a particular urgency because existing conditions pose a serious and immediate threat to the health or welfare of the community for which other funding is not available.

Eligibility: Business, Community/Watershed Group, Nonprofit Groups, Educational Institution, Private Landowner, Water and Wastewater Utilities, Local Government, State/Territorial Agency

Funding limitations: Program uses formula allocations to determine grant amount to the state and local jurisdiction which allocate funds to community projects. A match is not required for this program. Funding is based on appropriations for the fiscal year.

Conservation Reserve Program (CRP)

Entity: Natural Resource Conservation Service (NRCS)

Provides financial assistance to agricultural landowners in establishing approved conservation practices. The goals of the CRP program are to reduce water runoff and sedimentation, protect groundwater and help improve conditions of lakes, rivers, ponds and streams.

Eligibility: Agricultural landowners

Funding limitations: Eligible participants can receive annual rental payments based on the agriculture rental value of the land and cost-share assistance for up to 50 percent of the participant's costs in establishing approved conservation practices.

Environmental Education (EE) Grants

Entity: EPA

Under the Environmental Education Grants Program, EPA seeks grant proposals from eligible applicants to support environmental education projects that promote environmental awareness and stewardship and help provide people with the skills to take responsible actions to protect the environment. This grant program provides financial support for projects that design, demonstrate, and/or disseminate environmental education practices, methods, or techniques.

Eligibility: Applicants must represent one of the following types of organizations to be eligible for an environmental education grant: local education agency, state education or environmental agency, college or university, non-profit organization as described in section 501(c)(3) of the Internal Revenue Code, noncommercial educational broadcasting entity, tribal education agency (which includes schools and community colleges controlled by an Indian tribe, band, or nation). Applicant organizations must be located in the United States or territories and the majority of the educational activities must take place in the United States; or in the United States and Canada or Mexico; or in the U.S. Territories.

Funding limitations: EPA has distributed between \$2 and \$3.5 million in grant funding per year, supporting more than 3,600 grants.

Environmental Quality Incentive Program

Entity: Natural Resources Conservation Service (NRCS)

Financial and technical assistance is provided to help plan and implement conservation practices that address natural resource concerns and for opportunities to improve soil, water, plant, animal, air and related resources on agricultural land and non-industrial private forestland. Funds may also be used to help develop conservation plans which are required to obtain financial assistance. This program also aims to help producers meet Federal, State, Tribal and local environment regulations.

Eligibility: Owners of land in agricultural or forest production or persons who are engaged in livestock, agricultural or forest production on eligible land and that have a natural resource concern on the land may participate in EQIP. Limited resource farmers/ranchers, beginning farmers/ranchers, and socially disadvantaged producers and tribes may be eligible for higher practice payment rates for the implementation of conservation practices and conservations plans.

Funding limitations: Financial assistance payments are based on a portion of the average cost associated with practice implementation. Financial assistance is awarded through contracts up to a maximum term of ten years in length. Participants are limited to a \$300,000 total payment for all contracts within any six-year period. Projects deemed to have special environmental significance by the NRCS may be eligible to receive a maximum of \$450,000.

Target Watersheds Grant Program

Entity: River Network and EPA

Program is intended to provide financial and technical assistance for projects designed to strengthen the participant's organization. The program will provide local organizations, tribal and local governments with skills and techniques to protect their urban waterways and promote more vibrant, economically sustainable communities. The EPA's purpose is to encourage successful community-based approaches to protect and restore the nation's watersheds.

Eligibility: Funding will be provided for projects designed to strengthen an organization's capacity-building and ability to carry out programs to protect human health and the environment.

Funding limitations: Funding will range from \$30,000-70,000.

WaterSMART: Cooperative Watershed Management Program (CWMP)**Entity:** Department of the Interior, Bureau of Reclamation, Policy and Administration

The objective of this FOA is to invite States, Indian tribes, irrigation districts, water districts, local governmental entities, non-profit organizations, existing watershed groups, and local and special districts (e.g., irrigation and water districts, county soil conservation districts) to submit proposals for Phase I activities to establish or further develop a watershed group. Funding provided under this FOA may be used to develop a mission statement, project concepts, and/or a restoration plan.

Eligibility: Task A—Establishment of a Watershed Group: States, Indian tribes, local and special districts (e.g., irrigation and water districts, etc.), local governmental entities, interstate organizations, and non-profit organizations. To be eligible, applicants must also meet all of the requirements listed in Sec. III.A, Eligible Applicants. Task B—Further Development of an Existing Watershed Group: In order to be eligible to receive an award to fund activities under Task B, the applicant must be an eligible entity as described immediately above for Task A, and must be either be: (1) An existing "watershed group," (i.e., a grassroots, non-regulatory legal entity that otherwise meets the definition of a watershed group as described in Section I.B., Objective of Funding Opportunity Announcement; or (2) a participant in an existing watershed group. See also Sec. III.A, Eligible Applicants.

Funding limitations: Up to \$100,000 in Federal funds may be awarded to an applicant per award, with no more than \$50,000 awarded in each year of the project, under this FOA. The period of performance shall not exceed two years.

Water and Environmental Programs**Entity:** United States Department of Agriculture (USDA)

Program provides financial assistance for drinking water, sanitary sewer, solid waste and storm drainage facilities in rural areas and cities and towns of 10,000 or less. Technical assistance and training is also available to assist rural communities with their water, wastewater, and solid waste problems.

Eligibility: Public bodies, non-profit organizations and recognized Indian Tribes

Funding limitations: Financial assistance is provided in various ways including direct or guaranteed loans, grants, technical assistance, research and educational materials. Different amounts of assistance exist depending on the project type and financial tool the participant is seeking.

Wetlands Reserve Program**Entity:** Natural Resources Conservation Service (NRCS)

Provides technical and financial support to landowners with their wetland restoration efforts. The programs aims to offer landowners the opportunity to protect, restore, and enhance wetlands on their property.

Eligibility: Lands that are eligible under this program include: wetlands farmed under natural conditions, farmed wetlands; prior converted cropland; farmed wetland pasture; certain lands that have the potential to become a wetland as a result of flooding; rangeland, pasture, or forest production lands where the hydrology has been significantly degraded and can be restored; riparian areas which link protected wetlands; lands adjacent to protected wetlands that contribute significantly to wetland functions and values; and wetlands previously restored under a local, State, or Federal Program that need long-term protection.

Funding limitations: Depends on fiscal year appropriations and agreement terms with NRCS.

State

Beach Maintenance Reimbursement Fund Program

Entity: Texas General Land Office

The program aims to share the responsibility of maintaining public beaches between the Land Office and local governments.

Eligibility: The Land Office provides support to cities or counties bordering the seaward shoreline of the Gulf of Mexico and are qualified local governments with state financial assistance for the purpose of cleaning and maintaining public beaches

Funding limitations: Funds are reimbursed based on actual expenses. Seventy-five percent of the funds are allocated based on proportionate share of participant expenditure during the previous two fiscal years preceding application. Twenty-five percent is allocated based on the proportionate share of linear footage of gulf beach cleaned or maintained.

Boating Access Grants

Entity: Texas Parks and Wildlife Department (TPWD)

The Boating Access Grant Program provides 75% matching fund grant assistance to construct new, or renovate existing, public boat ramps that provide public access to public waters for recreational boating.

Eligibility: Local government sponsors must make an application, provide the land, provide access to the proposed boat ramp, supply 25% of the development costs, and accept operation and maintenance responsibilities for a minimum 25-year period. The grant funds dredging, stump removal, and aquatic weed control when activity can be shown to clear lanes to make water body more accessible primarily for recreational motorboats as opposed to general navigation. Retaining walls to protect integrity of boat ramps and associated parking lots (limited to 200 feet on either side of constructed facilities). Engineering (planning and design), and environmental clearance and permit costs

Funding limitations: This grant program provides 75% matching grant funds for the construction of public boat ramp facilities throughout Texas.

Clean Water State Revolving Fund (CWSRF)

Entity: State of Texas

This program provides low-interest loans that can be used for planning, design, and construction of wastewater treatment facilities, wastewater recycling and reuse facilities, collection systems, storm water pollution control, nonpoint source pollution control, and estuary management projects.

Eligibility: The program is open to a range of borrowers including municipalities, communities of all sizes, farmers, homeowners, small businesses, and nonprofit organizations. Project eligibility varies

according to each state's program and priorities. Loans for wastewater treatment plant projects are only given to political subdivisions with the authority to own and operate a wastewater system.

Funding limitations: The program offers fixed and variable rate loans at subsidized interest rates. The maximum repayment period for a CWSRF loan is 30 years from the completion of project construction. Mainstream funds offer a net long-term fixed interest rate of 1.30% below market rate for equivalency loans (project adheres to federal requirements) and 0.95% for non-equivalency (project adheres to state requirements) loans. Disadvantaged community funds may be offered to eligible communities with principal forgiveness of 30%, 50%, or 70% based upon the adjusted annual median household income and the household cost factor.

Coastal Impact Assistance Program (CIAP)

Entity: Bureau of Ocean Energy Management, Regulation & Enforcement and Texas General Land Office

Eligible projects must target one of the following: conservation, protection or restoration of coastal areas, including wetlands, mitigation of damage to fish, wildlife, or natural resources, planning assistance and the administrative costs of complying with this section, implementation of a federally approved marine, coastal, or comprehensive conservation management plan, and mitigation of the impact of development along the Outer Continental Shelf through funding of onshore infrastructure projects and public service needs.

Eligibility: State, federal agencies, along with universities (public or private), county and local governments, other state subdivisions and non-profit organizations.

Funding limitations: Funds for this program may only be granted to the 18 Texas coastal counties of Orange, Jefferson, Chambers, Harris, Galveston, Brazoria Matagorda, Jackson, Calhoun, Refugio, San Patricio, Nueces, Kleberg, Willacy, and Cameron. After review process and approval, the Land Office will contract with vendors or sub-grantees to perform projects. Project expenses are reimbursed after they are incurred. Funding advancements may be allowed only under special conditions.

Economically Distressed Areas Program

Entity: Texas Water Development Board (TWDB)

Program provides financial assistance for water and wastewater services in economically distressed areas where present facilities are inadequate to meet residents' minimal needs. The program also includes measures to prevent future substandard development.

Eligibility: Projects must be located in an area that was established as a residential subdivision as of June 1, 2005, has an inadequate water supply or sewer services to meet minimal residential needs and a lack of financial resources to provide water supply or sewer services to satisfy those needs. All political subdivisions, including cities, counties, water districts, and nonprofit water supply corporations, are eligible to apply for funds. The applicant, or its designee, must be capable of maintaining and operating the completed system.

Funding limitations: Financial support is in the form of grant or combination of a grant and a loan. The program does not fund ongoing operation and maintenance expenses, nor does it fund new development.

Landowner Incentive Program (LIP)

Entity: Texas Parks and Wildlife Department (TPWD)

The program offers project cost-sharing for projects that positively impact the valuable riparian areas and watershed in Texas. Projects showing the greatest benefit to targeted watersheds will receive priority as do projects offering long-term protection, long-term monitoring and greater than the required minimum landowner contribution.

Eligibility: Eligible parties include private, non-federal landowners wishing to enact good conservation practices on their lands in targeted ecoregions. Targeted ecoregions may change from year to year.

Funding limitations: Contracts will require a minimum of 25% landowner contribution (in-kind labor, materials, monetary, etc.).

Recreation Grant Program-Boating Access Grant

Entity: Texas Parks and Wildlife Department (TPWD)

This program provides financial assistance in the construction of public boat ramp facilities throughout Texas.

Eligibility: Local government sponsors must make an application, provide the land, provide access to the proposed boat ramp and accept operation and maintenance responsibilities for a minimum 25-year period.

Funding limitations: Local government sponsor must provide 25% of the development costs. The grant program provides 75% matching grant funds of the construction costs.

Recreation Grant Program-Boat Sewage Pumpout Grant

Entity: Texas Parks and Wildlife Department (TPWD)

This grant program offers financial assistance for the construction and/or renovation, operation, and maintenance of pump out and portable toilet dump stations.

Eligibility: Private marinas and local governments are qualified for this grant.

Funding limitations: Funds for this program are distributed on a first-come, first-served basis and can constitute up to 75% of all approved project costs. Participants may charge a maximum fee of \$5.00 to cover use and maintenance costs.

Regional Water Supply and Wastewater Facilities Planning Program

Entity: Texas Water Development Board (TWDB)

The program provides funds for studies and analyses to evaluate and determine the most feasible alternatives to meet regional water supply and wastewater facility needs, estimate the costs associated with implementing feasible regional water supply and wastewater facility alternatives, and identify institutional arrangements to provide regional water supply and wastewater services for areas in Texas. All proposed solutions must be consistent with applicable regional or statewide plans and relevant laws and regulations. A water conservation plan must be included in the proposed plan.

Eligibility: Political subdivisions, such as cities, counties, districts or authorities created under the Texas Constitution with the legal authority to plan, develop, and operate regional facilities are eligible applicants. Additional applicants include any interstate compact commission to which the State is a party and any nonprofit water supply corporation created and operating under Texas Civil Statutes Article 1434a.

Funding limitations: Funds are in the form of grants. Applicants must provide evidence of local matching funds on or before the date specified for negotiation and execution of a contract. Funds are generally limited to 50% of the total cost of the project, except that the board may supply up to 75% of the total cost to political subdivisions under certain conditions. Funds will be released only as reimbursement of costs actually incurred for approved activities. In-kind services may be substituted for any part of the local share if certain criteria are met.

TCEQ 319 Grant

Entity: TCEQ and Texas State Soil and Water Conservation Board (TSSWCB)

This program is intended to fund activities that prevent or reduce nonpoint source pollution. Proposed projects should focus on agricultural and/or silvicultural nonpoint source pollution prevention and abatement activities within the boundaries of impaired or threatened watersheds. Specific activities that can be funded include development of nine-element watershed protection plans including the formation and facilitation of stakeholder groups, surface water quality monitoring, data analysis and modeling, implementation of nine-element watershed protection plans and the nonpoint source portion of total maximum daily load implementation plans, demonstration of innovative best management practices, technical assistance to landowners for conservation planning, public outreach/education, and monitoring activities to determine the effectiveness of specific pollution prevention methods.

Eligibility: All state agencies or political subdivisions of the State of Texas including cities, counties, school districts, state universities, nonprofit organizations, and special districts can apply for funding. Private organizations may participate in projects as partners or contractors but may not apply directly for funding.

Funding limitations: Grants are awarded annually and funds projects for up to three years.

Texas Clean Rivers Program

Entity: TCEQ

The program's main purpose is to develop partnerships to provide quality-assured data to the TCEQ for use in decision-making, identification and evaluation of water quality issues, promote cooperative watershed planning, recommend management strategies, inform and engage stakeholders and adapt to changing priorities.

Eligibility: Partnerships range from river authorities, other agencies, regional entities, local government, industry and citizens. TCEQ provides most of the funding for to conduct the monitoring, quality assurance, and data management functions of the program.

Funding limitations: Unknown

Texas Coastal Management Program

Entity: Texas General Land Office

This program funded by NOAA is designed to ensure long-term environmental and economic health of the Texas Coast. The program has funded a wide variety of coastal management activities but has also developed the following categories for use of these funds: coastal natural hazards response, critical areas enhancement, Public Access, Waterfront Revitalization and Ecotourism Development, Permit Streamlining/Assistance, Governmental Coordination, Local Government Planning Assistance, and Water Sediment Quantity and Quality Improvements.

Eligibility: State and Local

Funding limitations: For on-the-ground habitat protection, restoration and land acquisition projects, eligible entities can expect up to \$400,000 for individual large-scale projects and up to \$100,000 for small-scale projects. Local Match must be 40% of the total project cost for this cycle. Match may be in the form of a "cash" match or an "in-kind" match or a combination of both.

Texas Farm and Ranch Lands Conservation Program

Entity: Texas Parks and Wildlife Department (TPWD)

The Texas Farm and Ranch Lands Conservation Program (TFRLCP) was established by the Texas Legislature in 2005 with the purpose of conserving working lands with high values for water, fish and wildlife, and agricultural production; especially lands at risk of development. TFRLCP maintains and

enhances the ecological and agricultural productivity of these lands through Agricultural Conservation Easements.

Eligibility: State and Local

Funding limitations: Unknown

Appendix 6 – Geospatial Databases for Pollutant Load Estimation Modeling

Data Type		Date	Resolution or Accuracy		
NOAA C-CAP		2006, 2011	30 meter		
Data Source		Coordinate System	Geographic Coverage		Format
NOAA		NAD 83	Coastal Regions		TIFF
Scale	Acceptance Criteria (See Instructions)				
1:100,000	Only source available in a format with consistent coverage				
Intended Use					
Impervious surface and land cover data is assigned to each coverage class in data set. This information is needed for modeling.					

Data Type		Date	Resolution or Accuracy		
Land Use		2006, 2011	NA		
Data Source		Coordinate System	Geographic Coverage		Format
HGAC		WGS 1984	HGAC Region		dBASE Table/ Shapefile
Scale	Acceptance Criteria (See Instructions)				
1:2,400 per HCAD	Only source available in a format with consistent coverage				
Intended Use					
Land use data is assigned to each parcel; this information is intended for use modeling					

Data Type		Date	Resolution or Accuracy		
SSURGO County Soil Surveys		1999	1:50 at scale		
Data Source		Coordinate System	Geographic Coverage		Format
USDA NRCS		NAD 83	Nationwide		Shapefile
Scale	Acceptance Criteria (See Instructions)				
1:20,000	Only source available in a format with consistent coverage				
Intended Use					
Water infiltration rates are assigned to each class of soil. Infiltration rates will be factored in the model to estimate effective runoff.					

Data Type		Date	Resolution or Accuracy		
TCEQ 2010 Stream Segments		2011	1:50 at scale		
Data Source		Coordinate System	Geographic Coverage		Format
TCEQ		Decimal Degrees, NAD 83	Statewide		Shapefile
Scale	Acceptance Criteria (See Instructions)				
NA	Only source available in a format with consistent coverage				
Intended Use					
This is reference data set to be used for illustration purposes. This dataset is not a model input.					

Data Type		Date	Resolution or Accuracy		
Digital Elevation Data		2006	10 meters		
Data Source		Coordinate System	Geographic Coverage		Format
USGS		WGS84	Nationwide		DEM
Scale	Acceptance Criteria (See Instructions)				
N/A	Only source available in a format with consistent coverage				
Intended Use					
This data set is used to define subbasins in the study area.					

Data Type	Date	Resolution or Accuracy
-----------	------	------------------------

CHARM Grid		2014	NA	
Data Source		Coordinate System	Geographic Coverage	Format
TCWP		DD, NAD83	Galveston County	Shapefile
Scale	Acceptance Criteria (See Instructions)			
1:2,400	A shell dataset prepared for purposes of managing and parsing modeling inputs, intermediate steps, and outputs.			
Intended Use				
This geospatial layer is not a data set in the sense of input or output data. It is, in effect, a spatial spreadsheet. It is used to manage data relationships between spatial layers and modeling inputs and outputs.				